


STM32H743VIT6, 480 MHz

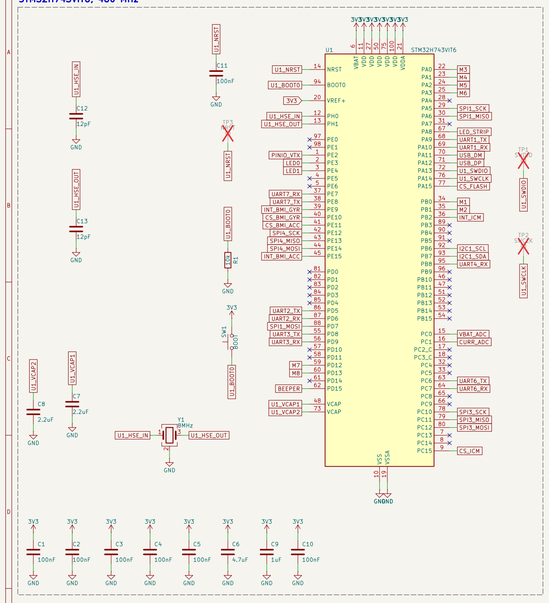


Gyro 1: ICM-20602 on SPI1 (Betaflight)

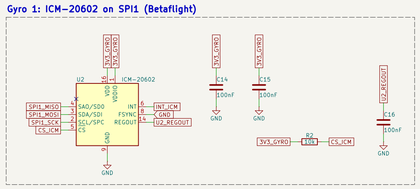


Gyro 2: BMI088 on SPI4 (INAV / ArduPilot)

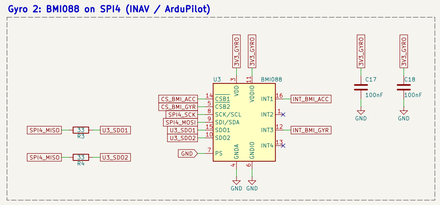


MS5611 on I2C1 (0x77)




16 MB blackbox on SPI3




VBAT in, TVS, sense dividers

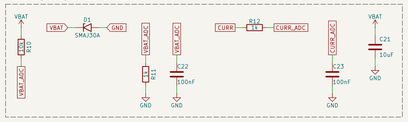


5 V / 2 A BEC

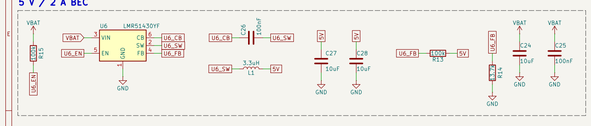


10 V / 2 A VTX BEC, switchable

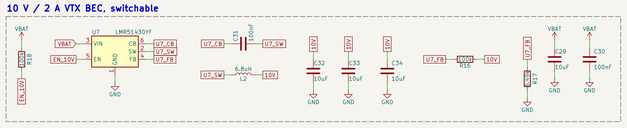


VTX power switch (Betaflight PINIO): high = 10 V off




3V3 for the MCU, flash, baro, LEDs




3V3_GYRO for the two IMUs alone




ESC 8-pin




Digital VTX 6-pin




ELRS receiver 4-pin on UART7




GPS + compass 6-pin



USB-C: configuration, DFU, power on the bench




USB ESD



VBUS into 5V through a Schottky



Buzzer driver (5 V buzzer on the BZ pads)




Status LED 0 (blue)




Status LED 1 (green)




Power LED (red, on 3V3)



Solder pads

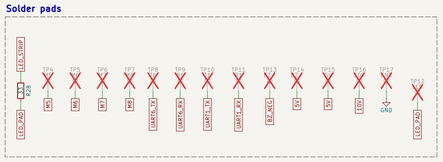

30.5 mm stack holes



Power flags



Generated from blocks -> design.json by heypcb-kicad

HeyPCB method / pure KiCad

Sheet: /

File: kestrel_fc.kicad_sch

Title: Kestrel H7 — FPV flight controller: STM32H743, dual IMU, baro, 16 MB

Size: A1	Date: 2026-10-05	Rev: A
KiCad E.D.A. 10.0.6		Id: 1/1