


USB-C: 5 V in (data pins unused)

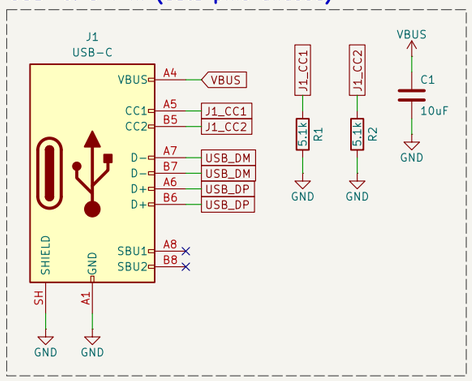


3.3 V for the MCU and the light sensor (XC6206)

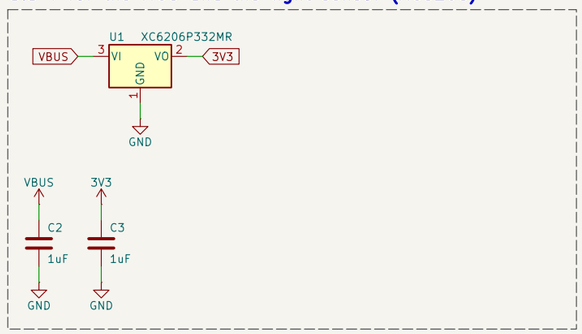


CH32V003: light, touch, fade, sleep timer

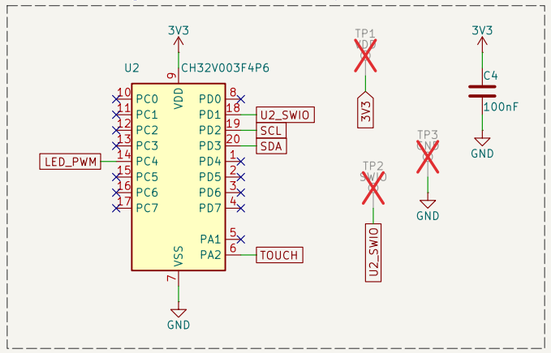


APDS-9306: how dark is the room

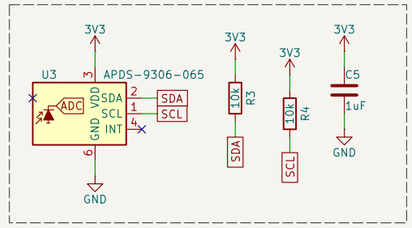


Gold cheek: the touch switch

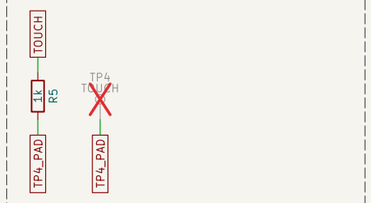


The glow's PWM switch




Glow LED 0 (orange)




Glow LED 1 (orange)




Glow LED 2 (orange)




Glow LED 3 (orange)




Glow LED 4 (orange)




Glow LED 5 (orange)




Glow LED 6 (orange)



Glow LED 7 (orange)



Power flags



Generated from blocks -> design.json by heypcb-kicad

HeyPCB method / pure KiCad

Sheet: /

File: moon_light.kicad_sch

Title: Luna — night-light moon: auto-on amber glow, light sensor, touch, sl

Size: A3	Date: 2026-10-05	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1