GPU-Z

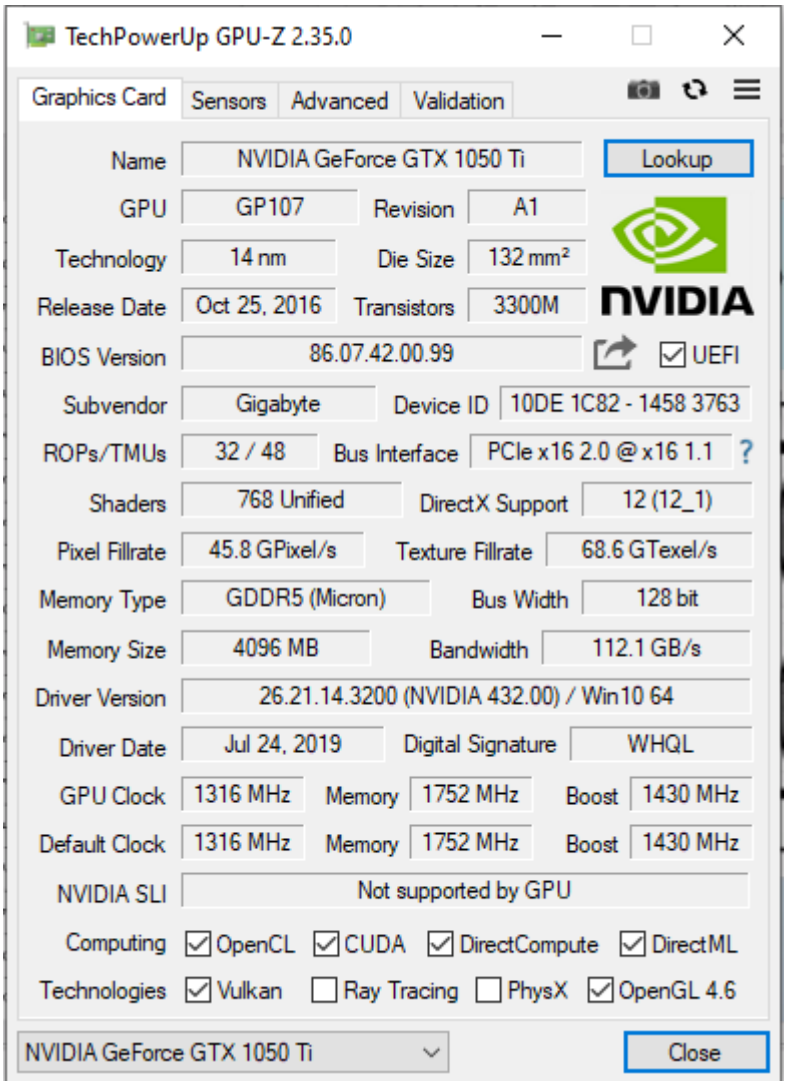
TechPowerUp GPU-Z 2.35.0
Graphics Card
Sensors
Advanced
Validation
Name
NVIDIA GeForce GTX 1050 Ti
Lookup
GPU
GP107
Revision
A1
Technology
14 nm
Die Size
132 mm²
Release Date
Oct 25, 2016
Transistors
3300M
NVIDIA
BIOS Version
86.07.42.00.99
UEFI
Subvendor
Gigabyte
Device ID
10DE 1C82 - 1458 3763
ROPs/TMUs
32 / 48
Bus Interface
PCIe x16 2.0 @ x16 1.1
Shaders
768 Unified
DirectX Support
12 (12_1)
Pixel Fillrate
45.8 GPixel/s
Texture Fillrate
68.6 GTexel/s
Memory Type
GDDR5 (Micron)
Bus Width
128 bit
Memory Size
4096 MB
Bandwidth
112.1 GB/s
Driver Version
26.21.14.3200 (NVIDIA 432.00) / Win10 64
Driver Date
Jul 24, 2019
Digital Signature
WHQL
GPU Clock
1316 MHz
Memory
1752 MHz
Boost
1430 MHz
Default Clock
1316 MHz
Memory
1752 MHz
Boost
1430 MHz
NVIDIA SLI
Not supported by GPU
Computing
OpenCL
CUDA
DirectCompute
DirectML
Technologies
Vulkan
Ray Tracing
PhysX
OpenGL 4.6
NVIDIA GeForce GTX 1050 Ti
Close

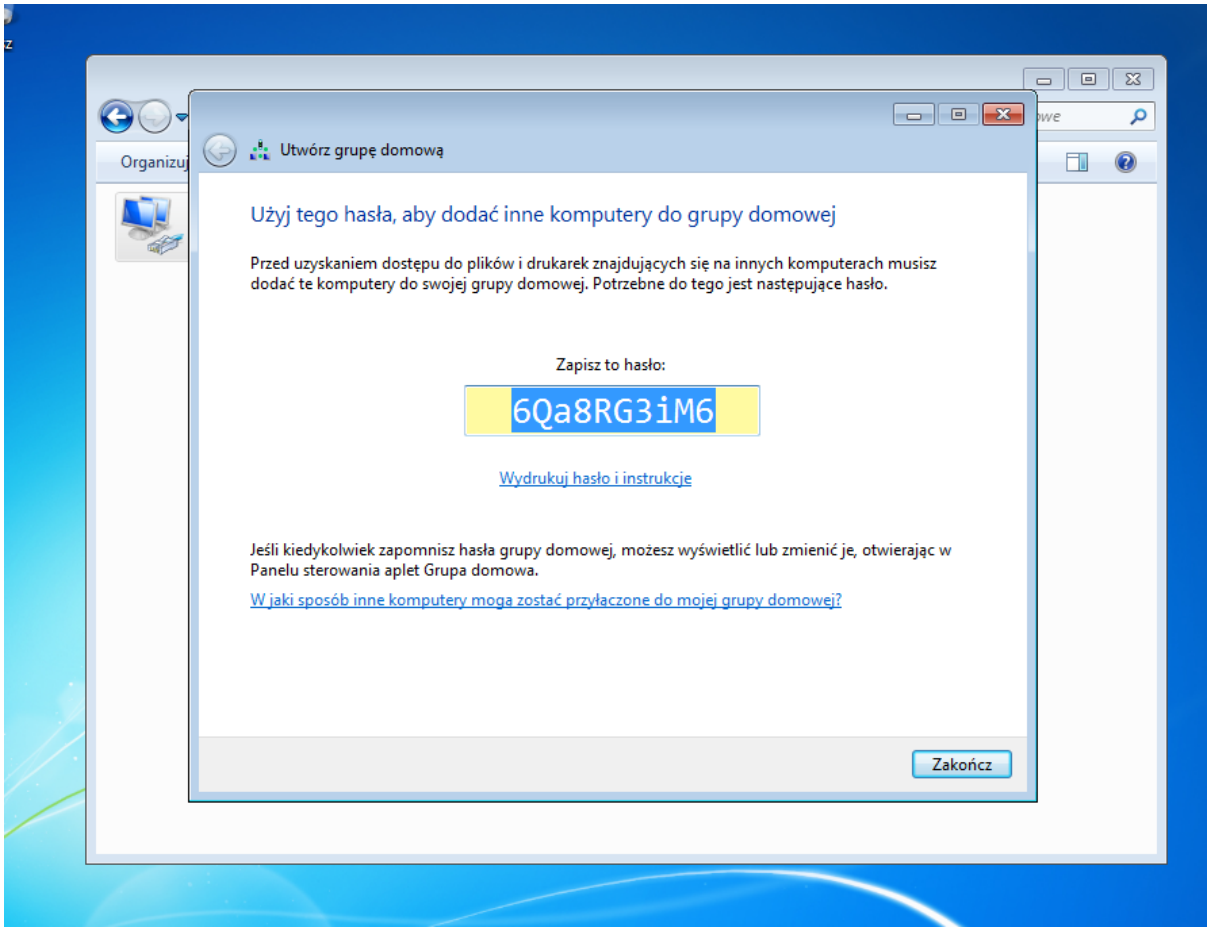
Organizuj
Utwórz grupę domową
Użyj tego hasła, aby dodać inne komputery do grupy domowej
Przed uzyskaniem dostępu do plików i drukarek znajdujących się na innych komputerach musisz dodać te komputery do swojej grupy domowej. Potrzebne do tego jest następujące hasło.
Zapisz to hasło:
6Qa8RG3iM6
Wydrukuj hasło i instrukcje
Jeśli kiedykolwiek zapomnisz hasła grupy domowej, możesz wyświetlić lub zmienić je, otwierając w Panelu sterowania aplet Grupa domowa.
W jaki sposób inne komputery mogą zostać przyłączone do mojej grupy domowej?
Zakończ

HWINFO

HWiNFO64 v6.32-4270 @ ASUS A88X-PRO - System Summary

CPU

	AMD A10-7800	28 nm
Stepping	KV-A1	Cores/Threads	4 / 4
Codename	Steamroller/Kaveri	µCU	6003106
OPN	AD7800YBI44JA	Prod. Unit
CPU #0	Platform	FM2r2 (uPGA)
TDP 65.2 W	Cache	2x96 + 4x16 + 2x2M

Features: MMX, 3DNow!, 3DNow!-2, SSE, SSE-2, SSE-3, SSSE-3, SSE4A, SSE4.1, SSE4.2, AVX, AVX2, AVX-512, BMI1, ABM, TBM, FMA4, ADX, XOP, DEP, AMD-V, SMX, SMEP, SMAP, TSX, MPX, EM64T, EIST, TM1, TM2, HTT, CPB, SST, AES-NI, RDRAND, RDSEED, SHA, SGX, SME

Operating Point	Clock	Ratio	Bus	VID
CPU Base	3500.0 MHz	x35.00	100.0 MHz	-
CPU Boost Max	3900.0 MHz	x39.00	100.0 MHz	1.4125 V
CPU Status	3914.0 MHz	x38.00	103.0 MHz	1.3875 V
Northbridge Max	1600.0 MHz	x16.00	100.0 MHz	1.4125 V
Northbridge Status	1442.0 MHz	x14.00	103.0 MHz	1.0875 V

Motherboard	ASUS A88X-PRO		
Chipset	AMD A88X (Bolton-D4)		
BIOS Date 03/10/2016	BIOS Version 2603	UEFI	

Drives

SATA 3 Gb/s	SAMSUNG HD154UI [1.5 TB]
SATA 6 Gb/s @ 6Gb/s	KINGSTON SUV400S37480G [480 GB]

GPU

	GIGABYTE GTX 1050 Ti OC (GV-N105TOC-4		
	NVIDIA GeForce GTX 1050 Ti		
	GP107-400		
	PCIe v2.0 x16 (5.0 GT/s) @ x16 (2.5 GT/s)		
GPU #0	4 GB	GDDR5 SDRAM	128-bit
ROPs / TMUs 32 / 48	Shaders	Unified: 768	

Current Clocks (MHz): GPU 607.5 | Memory 202.5 | Video 556.5

Memory Modules

[#2] Kingston KHX2133C11D3/8GX

Size 8 GB | Clock 1067 MHz | ECC N

Type DDR3-2133 / PC3-17000 DDR3 SDRAM UDIMM

Freq	CL	RCD	RP	RAS	RC	Ext.	V
1067	11	12	12	30	48	XMP	1.60
800.0	9	9	9	27	36	XMP	1.50
800.0	11	11	11	28	39	-	1.50
666.7	9	9	9	24	33	-	1.50
533.3	7	7	7	19	26	-	1.50
400.0	6	6	6	14	20	-	1.50

Memory

Size 8 GB | Type DDR3 SDRAM

Clock 824.0 MHz = 8.00 x 103.0 MHz

Mode Single-Channel | CR

Timing 11 - 11 - 11 - 28 | tRC 32 | tRFC

Operating System: Legacy Boot | Secure Boot

Microsoft Windows 10 Professional (x64) Build 18362.1139 (1903/May 2019 Update)

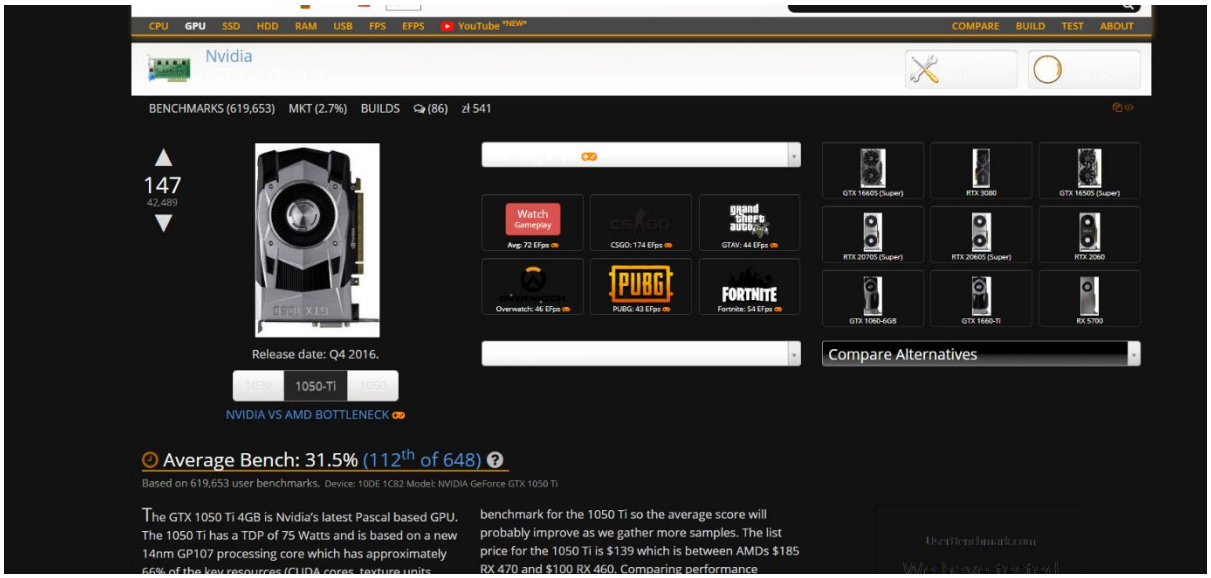

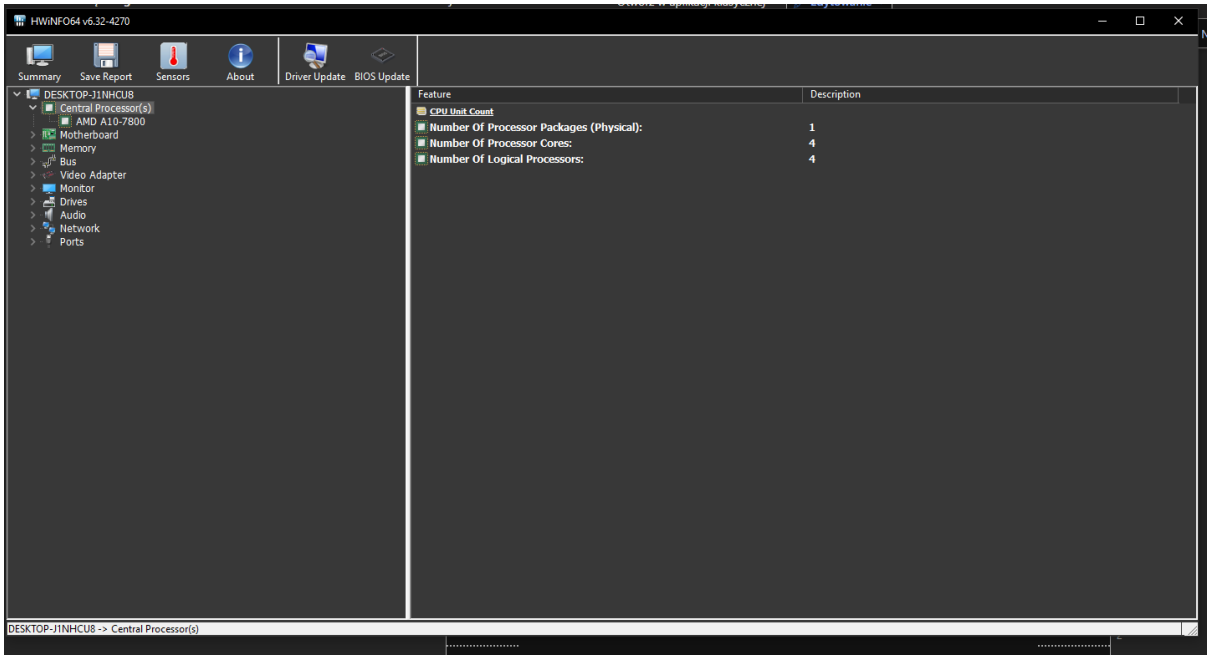
HWiNFO64 v6.32-4270
Summary
Save Report
Sensors
About
Driver Update
BIOS Update
DESKTOP-J1NHCU8
Central Processor(s)
AMD A10-7800
Motherboard
Memory
Bus
Video Adapter
Monitor
Drives
Audio
Network
Ports
Feature
Description
CPU Unit Count
Number Of Processor Packages (Physical): 1
Number Of Processor Cores: 4
Number Of Logical Processors: 4
DESKTOP-J1NHCU8 -> Central Processor(s)

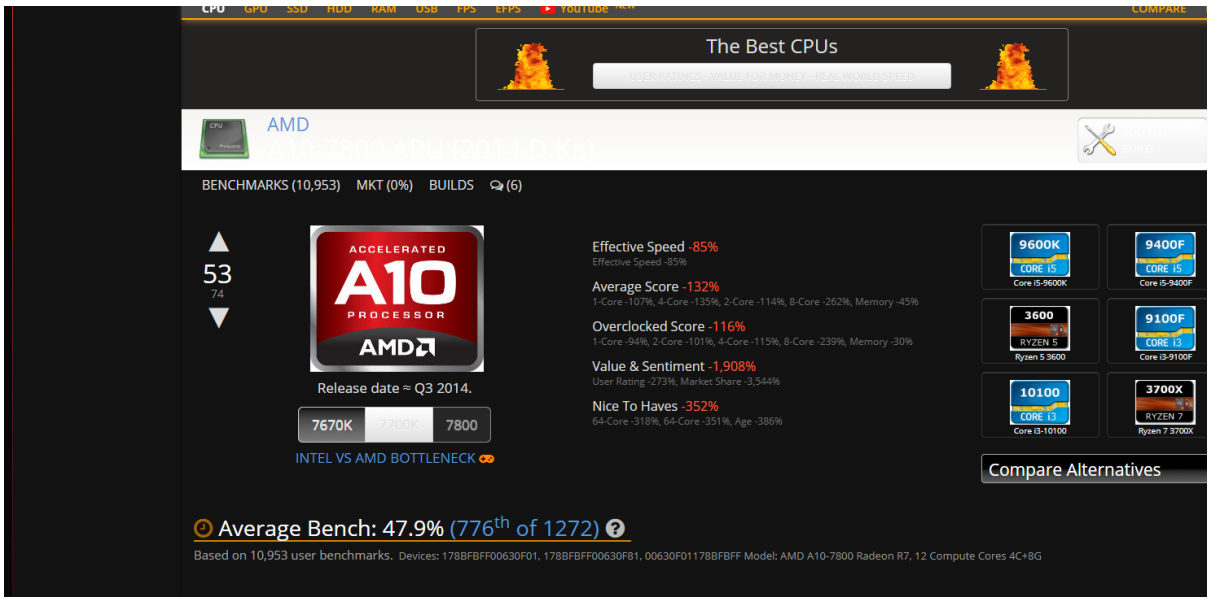
CPU GPU SSD HDD RAM USB FPS EFPS YouTube
COMPARE
The Best CPUs
AMD
BENCHMARKS (10,953) MKT (0%) BUILDS (6)
53
74
ACCELERATED A10 PROCESSOR AMD
Release date ≈ Q3 2014.
7670K 7700K 7800
INTEL VS AMD BOTTLENECK
Effective Speed -85%
Average Score -132%
Overclocked Score -116%
Value & Sentiment -1,908%
Nice To Haves -352%
9600K
9400F
3600
9100F
10100
3700X
Compare Alternatives
Average Bench: 47.9% (776th of 1272)
Based on 10,953 user benchmarks. Devices: 178BFBFF00630F01, 178BFBFF00630F81, 00630F01178BFBFF Model: AMD A10-7800 Radeon R7, 12 Compute Cores 4C+8G

CheckMON

CheckeMON
Tests
About
DISPLAY CONFIG
Resolution: 1920 x 1080
Color Depth: 32 bits per pixel
Refresh Rate: 60 Hz
TESTS
Solid Colors
Geometry
Convergence Dots
Moire Interference
Convergence Lines
Crosstalk
Color Gradients
Power Supply
Color Spectrum
Phase
Note: Make sure the monitor is operating at the optimal resolution and maximum color depth before you start any test. Press ESC to abort any test.

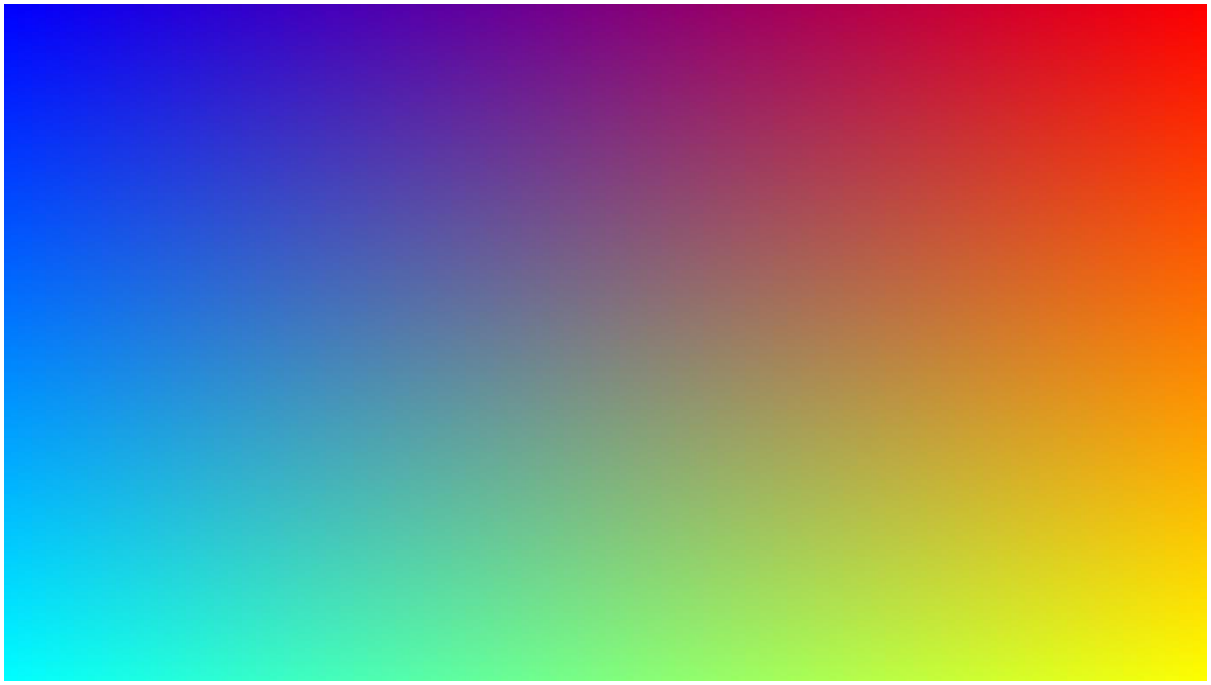

EIZO monitor test

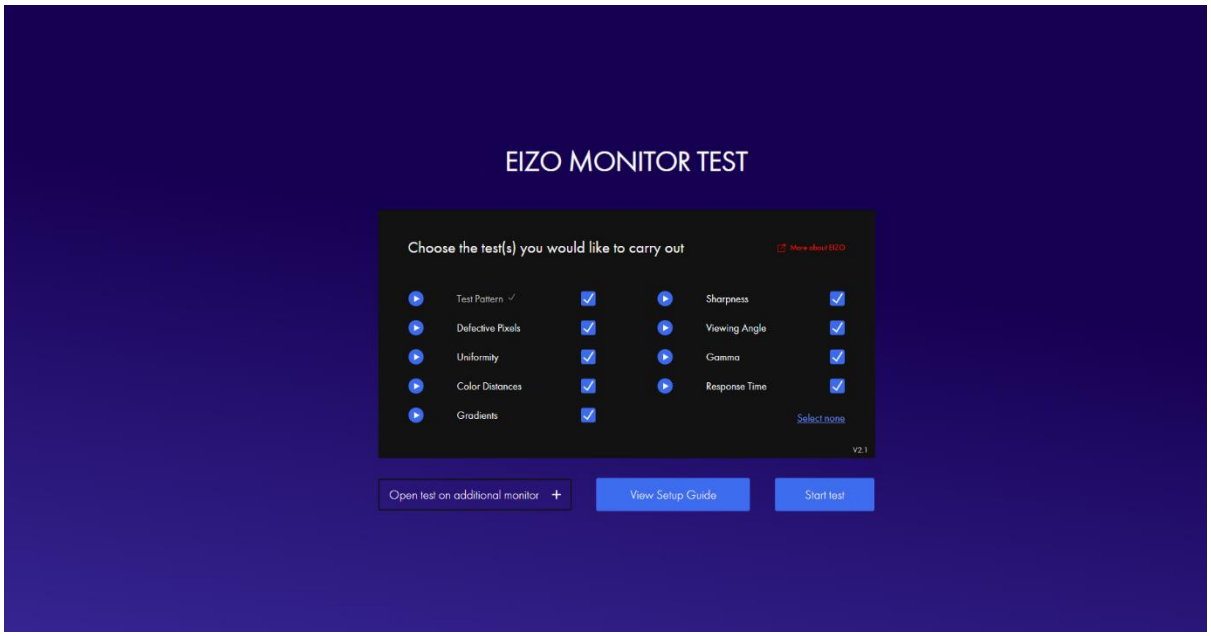

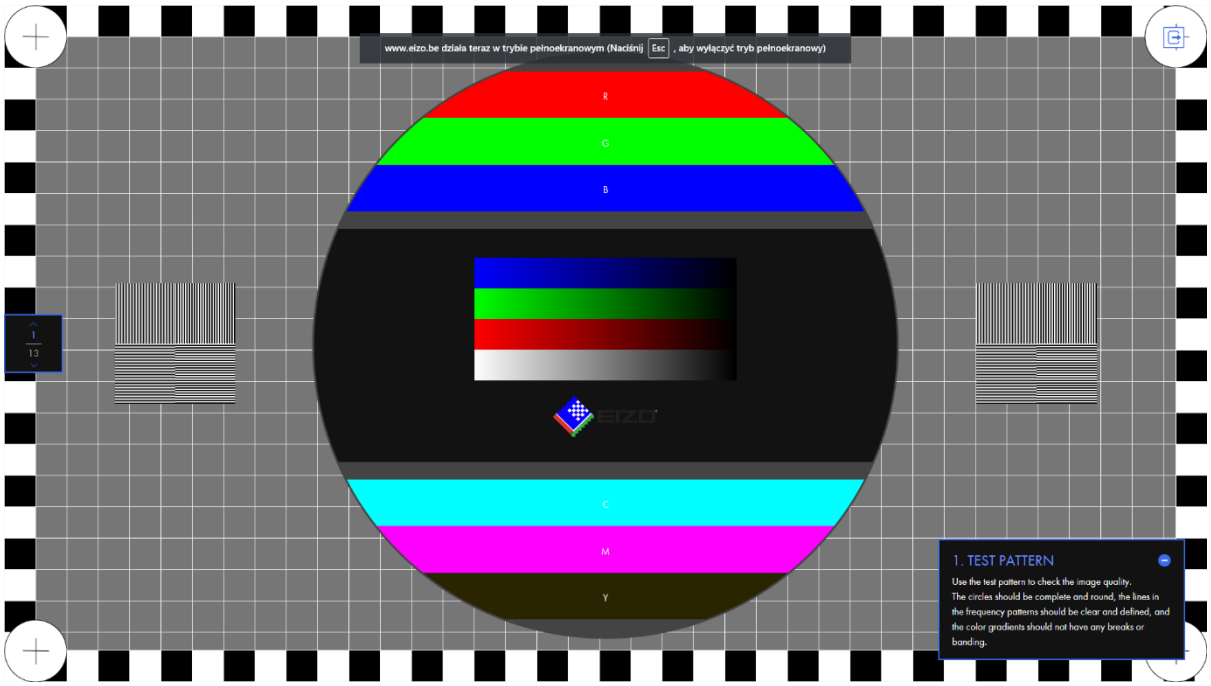

Monitor calibration Wizard

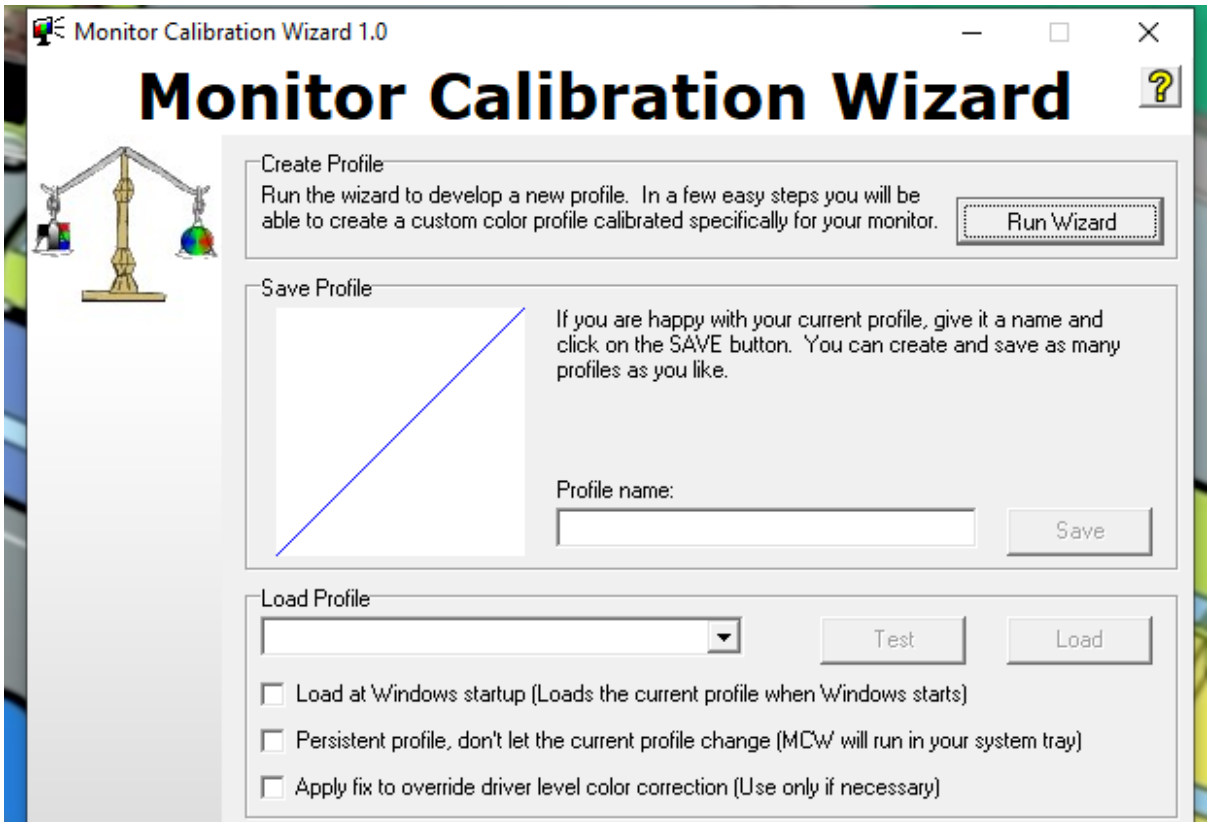

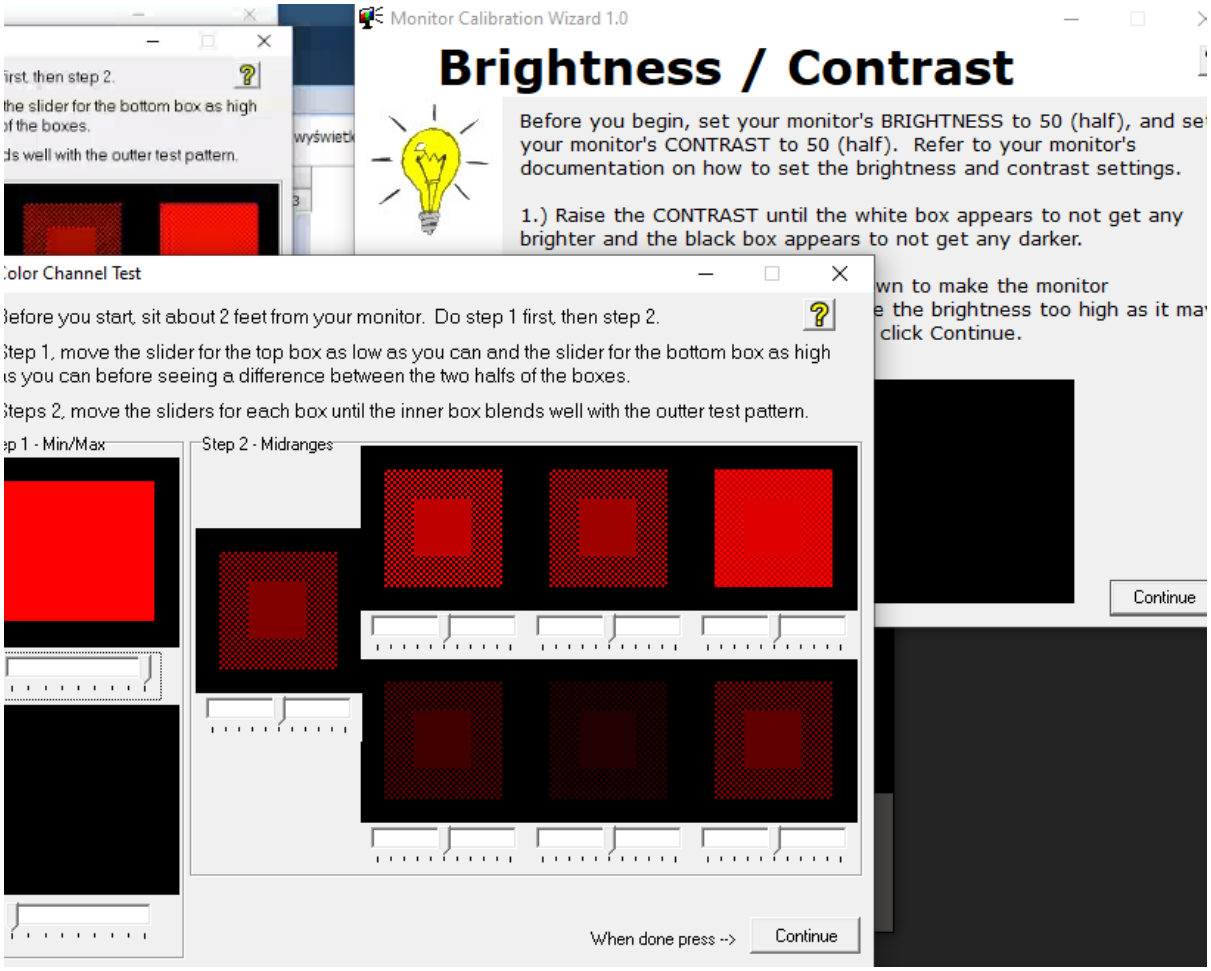
Monitor Calibration Wizard 1.0
Brightness / Contrast
Before you begin, set your monitor's BRIGHTNESS to 50 (half), and se
your monitor's CONTRAST to 50 (half). Refer to your monitor's
documentation on how to set the brightness and contrast settings.
1.) Raise the CONTRAST until the white box appears to not get any
brighter and the black box appears to not get any darker.
wn to make the monitor
e the brightness too high as it ma
click Continue.
Continue
Color Channel Test
Before you start, sit about 2 feet from your monitor. Do step 1 first, then step 2.
Step 1, move the slider for the top box as low as you can and the slider for the bottom box as high
as you can before seeing a difference between the two halfs of the boxes.
Steps 2, move the sliders for each box until the inner box blends well with the outter test pattern.
Step 2 - Midranges
When done press -->
Continue

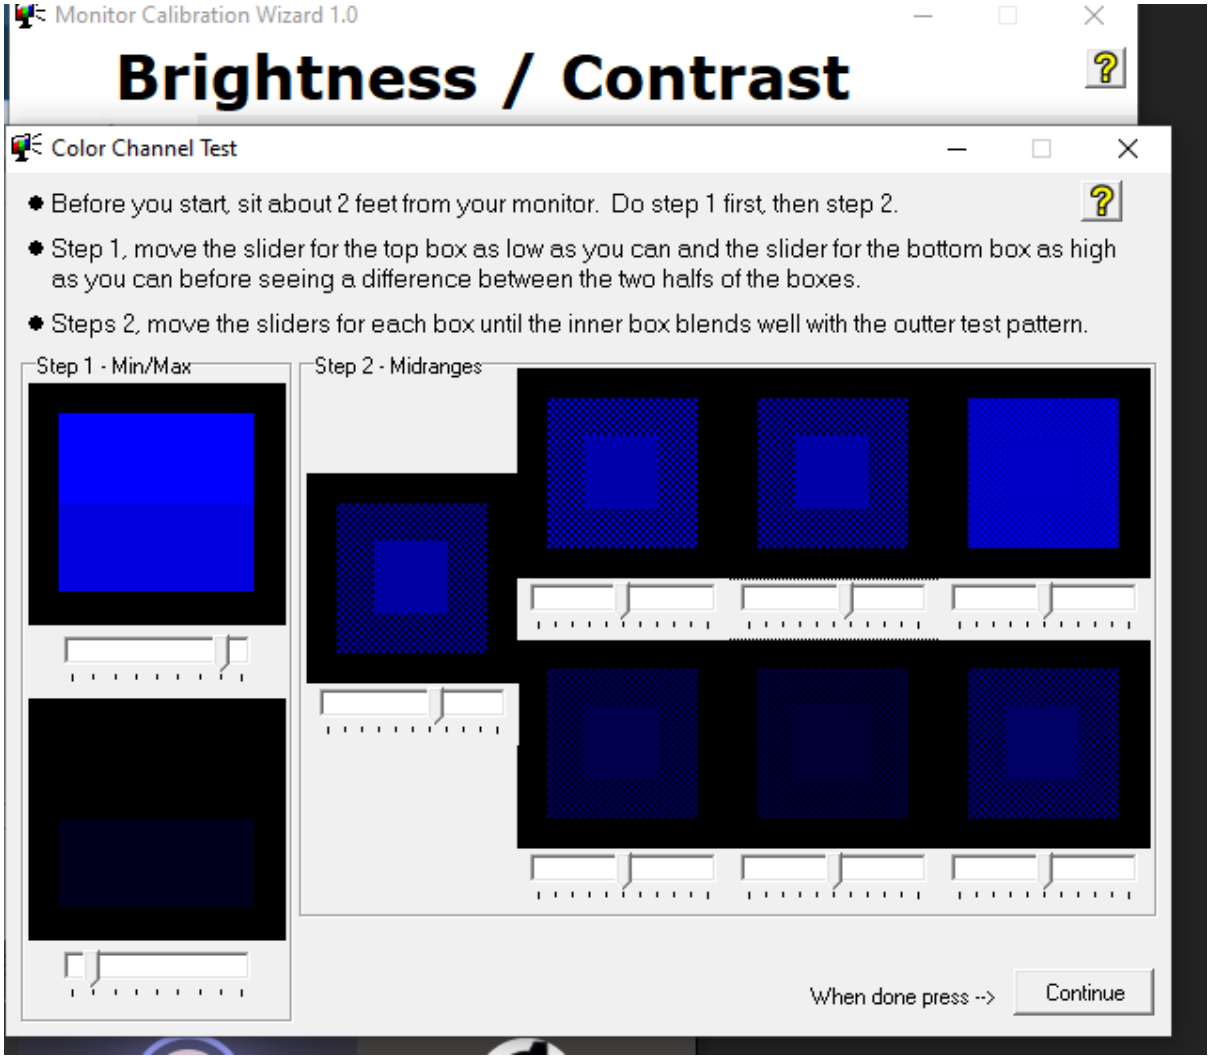
Monitor Calibration Wizard 1.0
Brightness / Contrast
Color Channel Test
Before you start, sit about 2 feet from your monitor. Do step 1 first, then step 2.
Step 1, move the slider for the top box as low as you can and the slider for the bottom box as high as you can before seeing a difference between the two halfs of the boxes.
Steps 2, move the sliders for each box until the inner box blends well with the outter test pattern.
Step 1 - Min/Max
Step 2 - Midranges
When done press -->
Continue

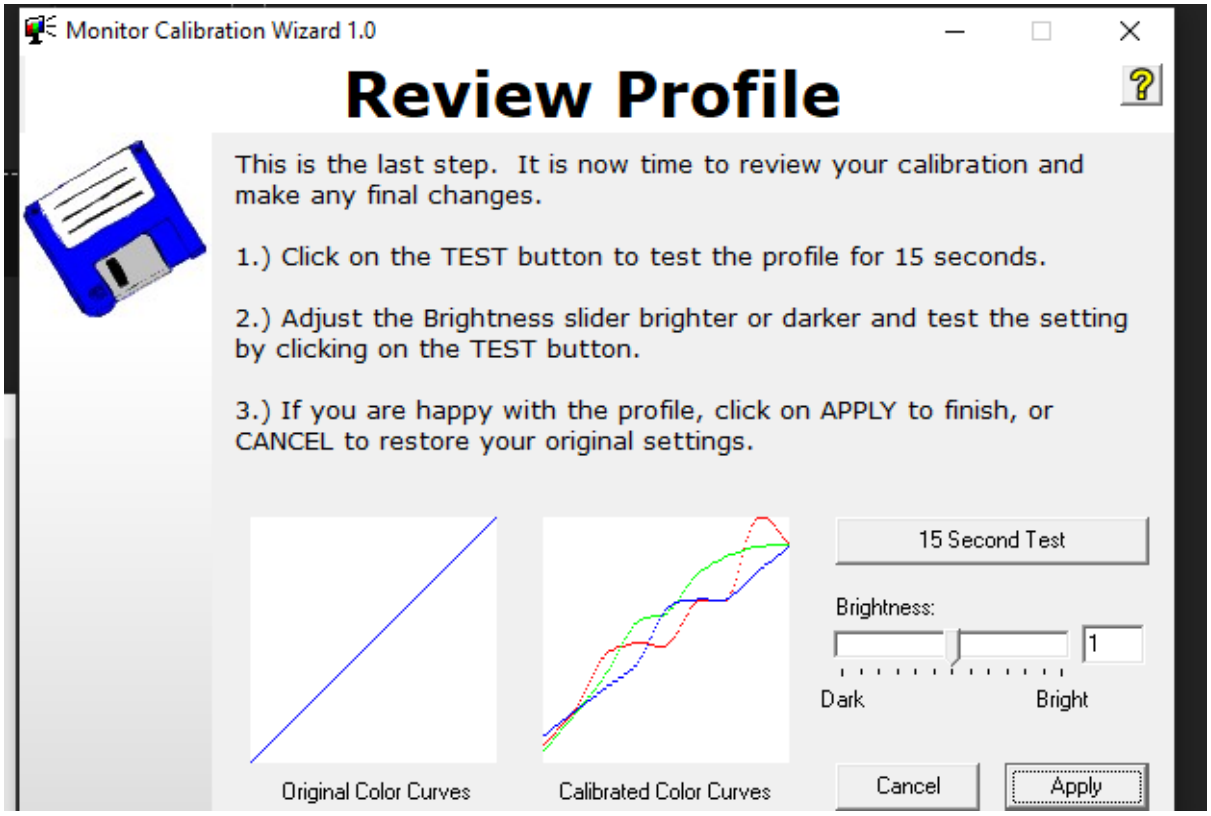
Monitor Calibration Wizard 1.0
Review Profile
This is the last step. It is now time to review your calibration and make any final changes.
1.) Click on the TEST button to test the profile for 15 seconds.
2.) Adjust the Brightness slider brighter or darker and test the setting by clicking on the TEST button.
3.) If you are happy with the profile, click on APPLY to finish, or CANCEL to restore your original settings.
15 Second Test
Brightness:
1
Dark
Bright
Original Color Curves
Calibrated Color Curves
Cancel
Apply