


Hydraulic Motor

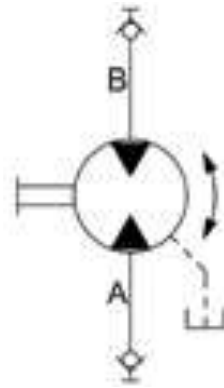

Function

- Material number R961004259
- Material short text base cover
- TS-MC-HYMOT-152X136X&
- External gear motors are displacement machines in which the displacement chambers are made up of gears with external gearing. High and low-pressure range are separated by the contact of the meshing gears. The motor shaft is fitted with a disc with reflective stripes and a protective housing made of Plexiglas which serves as contact protection and for holding optional speed sensor . The motor is suitable for both clockwise and anticlockwise rotation. Connections are via self-sealing coupling plugs.
- Dimensions mm (L x W x H) 250 x 220 x 160
- Weight kg 5.9
- Working pressure bar 120
- Displacement cm^3/rev 8
- Industrial type AZMF-12-008
- Oil flow max. l/min 8
- Speed max. RPM 1000

Scope of Supply

Bi directional Hydraulic motor