


Pressure Sequence Valve

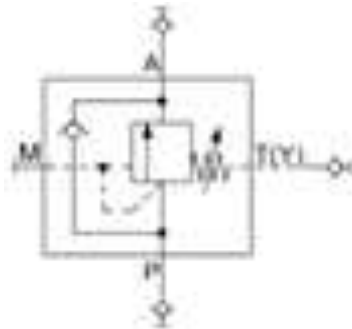

- Material number R961002558
- Material short text PRESSURE SEQUENCE TS-HC-DZ 6 DP1-5X/75Y
- The direct-operated pressure sequence valve is used for the pressure-dependent connection of a second system, the setting is effected by means of a handwheel. Pilot oil supply internal, leakage oil drain external, with non-return valve, mounted on component plate. Connections via self-sealing coupling plugs
- Dimensions mm (L x W x H) 197 x 125 x 86
- Weight kg 2.47
- Working pressure max. bar 120
- Sequencing pressure bar 75
- Operation manual
- Industrial type DZ6DP1-5X/75Y

Scope of Supply

- Pressure Sequence Valve, Max operating Pressure: 40 Bar, Sub-plate mounting type