


## Pressure Reducing Valve

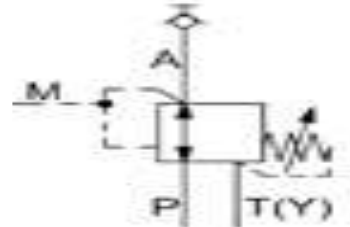

- Material number R961002544
- Material short text PRESSURE RED.VALVE TS-HC-DR 6 DP1- 5X/75&
- The direct-operated pressure reducing valve is used to reduce the system pressure, the setting is effected by means of a handwheel. Pilot oil supply internal, leakage oil drain external, without nonreturn valve, mounted on component plate.
- Connections via self-sealing coupling plugs
- Dimensions mm (L x W x H) 194 x 125 x 84
- Weight kg 2.45
- Working pressure max. bar 120
- Outlet pressure max. bar 75
- Operation manual
- Industrial type DR6DP1-5X/75YM

### Scope of Supply

Pressure Reducing Valve, Max operating Pressure: 40 bar, Sub-plate mounting type