


Pressure Relief Valve

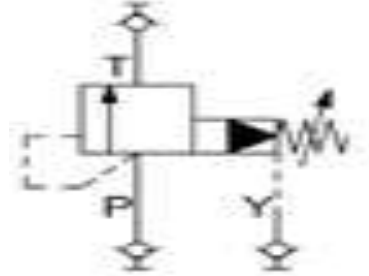

- Material number R901460846
- Material short text PRESS RELIEF VALVE TS-HC-DB 6 K1-4X/50YV
- The pilot-operated pressure relief valve is used to limit the system pressure, the setting is effected by means of a handwheel. Pilot oil supply internal, leakage oil drain external, mounted on component plate as well as in-line also. Connections via self-sealing coupling plugs
- Dimensions mm (L x W x H) 155 x 125 x 79
- Weight kg 1.5
- Working pressure max. bar 120
- Set pressure bar 50
- Operation manual
- Industrial type DB6K1-4X/50YV

Scope of Supply

- Pressure Relief Valve, Max. Pressure 100 Bar, Knob/screw operated, Size: 1/4"-Inline type, with QRC, Vendor should be able to demonstrate the operation of this valve from 20 bar to 80 bar at different settings