


## 1. 4/3 Way DC Valve Double Solenoid

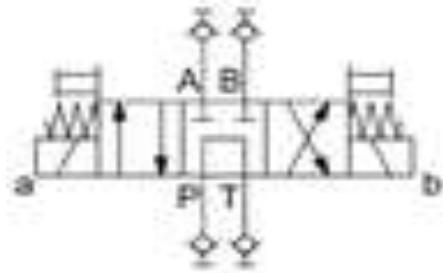

### Function

- Material number R961002548
- Material short text DIR.-CONTROL VALVE TS-HC-4WE 6 G6X/EG24&
- Directional control spool valve; 4 connections; 3 switching positions; electrical operation; spring centering; concealed auxiliary control; control spool directly operated; control spool type "G"; state of rest, P-T open, A-B blocked; mounted on component plate; Connections via self-sealing coupling plugs
- Dimensions mm (L x W x H) 206 x 125 x 98
- Weight kg 2.9
- Operating voltage VDC 24
- Working pressure max. bar 120
- Industrial type 4WE6G6X/EN24N9K4
- Plug-in connection low leakage oil Type W

### Scope of Supply

4/3 way DC valve, 24VDC, Spring Centered, Tandem Centre, solenoid operated spring return