



HIKOM INTERNATIONAL LLP





Based in Greater Noida, India

We have built up area of 40000 sqft. in Greater Noida with a pan-india services support network. Customers have confidence in Hikom and its ability to deliver what is committed.

Director's Message

"Since the very beginning professional expertise, commitment and entrepreneurship have characterised Hikom employees. These human assets will carry us forward and ensure our customers the best imaginable services and support well into the future. This is why we continue to invest in our employees"

Hikom Overview

HIKOM INTERNATIONAL LLP is a specialised doors company for Healthcare Medical, Pharmaceutical, Clean Room, Cold Storage, Warehousing, Industrial Usage and many other Industries. HIKOM manufacture international quality standard doors with latest technology. Our own R&D facility dedicated to continuous upgradation and technology improvement for better services.



Why HIKOM ?

International Product Quality :

Hikom is an ISO certified company. Hikom produces high quality products, which meet material and processing procedure as per international standards.

Complying Health Standards :

Hikom doors do not have sharp edges and do not accumulate any dust and bacteria. They are easy to clean and maintain sterility, which helps to meet health standards.

Durable & Minimum Maintenance :

Hikom uses high-grade material quality for its products, which makes the product more durable and reduces maintenance cost. With proper installation, there is minimum wear and tear and maintenance efforts are also reduced.

Standard & Customized Solutions

Apart from standard solutions, Hikom also has the ability to provide customized solutions for the new door opportunities and replacement situations.

Continuous Product Upgradation

With a capable and in-house Research and Development team with strong design abilities, Hikom boasts of continuous upgradation of its products. Hikom also has the capacity to develop customized solutions as per your requirements.



Time-tested Performance

Hikom's product range has been used in Indian and International markets. High-end quality and durability of our products have been enhancing performance for our clients for many years.

Wide Product Range

Hikom caters to Indian and International markets with a wide range of products. They include:

- Hermetic and Non-Hermetic Doors
- Sliding and Hinge doors
- Manual and Automatic Doors
- Standard and Customized Doors
- Special and Specific Application Doors
- Wide range of doors for medical industry



Hermetic Sealed Sliding And Hinge Doors

SPECIFICATIONS

The hermetically sealed sliding OR hinge door. The door is developed specially for operation theaters and sterile areas. Normally an operation theater runs on over pressure. At this pressure any leakage losses will still not be measurable due to the hermetic sealing property of the door.

Core of the door blade is 60 mm thick and has 4mm thick without joint premium grade High Pressure Laminates on both side of 52mm thick injected polyurethane. This door core is framed with extruded aluminium profiles finished with natural anodizing. Smart radius and curves on the edges makes the door cleaning very easy.

Specially designed lever opener made out of solid stainless steel is there to ensure effortless opening and closing of the door.

The door blade comes with a border printed toughed glass sandwich vision window, flushed with both side core surfaces of the door. Special Design of 3 tier EPDM sealing gasket to seal the aluminium wall frame and 2 tier bottom gasket fixed on the lower part of door blade to ensure perfect hermetic sealing with finished floor.

There are many options, which are available with this door i.e. Doors skin of 1.0mm thick S.S. 304 can be provided either/both side of door core, Door lock, Bigger size vision window, D-handle with flush grip for full passage opening, kick plate and S.S.304 guard columns etc.

Applications: -

1. Operation Theater
2. Laboratories
3. Sterile Rooms
4. Intensive Care Unit (ICU)
5. Neonatal in Core Unit (NICU)
6. Critical Core Unit (CCU)
7. O.T. Lobby
8. Quarantine Rooms





Anti-Radiation Sliding And Hinge Door

SPECIFICATIONS

Anti-Radiation sliding and hinge doors are basically hermetically sealed doors with 2mm thick lead inside. These doors are specially designed for rooms with radiation shielding requirements.

Anti-radiation sliding and hinge doors have 2mm thickness of lead lining inside that comply with AERB (Atomic Energy Regulatory Board) requirements for the X-Ray shielding doors. 3 sided aluminium wall frame also comes with 2 mm lead inlay. Anti-Radiation doors can also with stand up to 75 Pa over pressure. At this pressure any leakage losses will still not be measurable due to the hermetic property of the door.

60 mm thick door core consists of 4 mm thick high pressure on laminate both sides, 2 mm thick lead lining and 50 mm thick high pressure injected polyurethane. The door also provides noise insulation up to 28 db.

Apart from 3 tier EPDM sealing gasket for wall frames, a special 2 tier bottom gasket is fixed on the lower part of the door blade to ensure perfect hermetic sealing

As an option 10 mm thick lead glass having minimum lead capacity equivalent to 2.2 mmpb with clear view of 305x305mm, fitted in 2 mm thick mirror finished stainless steel frame on both sides of the door, can be provided to see inside the radiation room.

There are many optional accessories that are available with this door i.e. lock, bigger size lead glass vision window, D-Handle & flush grip for full passage opening, kick plate and S.S. guard columns etc.

Applications: -

- 1.X-Ray Rooms
- 2.Fluoroscopy Rooms
- 3.Radio Therapy Rooms
- 4.Cath Labs
- 5.Mammography Rooms
- 6.Rooms With Radiation Equipment Inside





Clean Room Hinge Door

SPECIFICATIONS

Clean room doors are flushed hinged doors. The flush construction prevents bacterial growth hence ensures perfect sterility in the room. It comes in single and double leaf doors depending on the width of clear passage required. These doors come in standard sizes, but customization is also available as per special requirements and site conditions.

Door leafs are made from 0.8mm thick PCGI sheet or 0.6mm PPG' or 4mm HPCL sheet formed to provide a 44 thick fully flush, double skin door shell with lock seam joints at the stile edges. Polyurethane is used as IN-FILL to give the required rigidity and effective acoustic insulation.

Wall frames are produced from 3mm thick aluminum or powder coated galvanized steel sheet to single rebate profile of size 80mm X 50mm. The wall frames are installed on brick/block wall or plastered openings with the help of anchor fasteners.

Border printed vision window of 44mm thick toughened clear glass can be provided in any rectangular size to both side of the door leaf. These window glasses will be flushed with the door leaf.

Stainless steel ball bearing butt hinges fixed to the door frame and door leaf for noiseless and friction free movement for years after year. Mortise sash lock with lever handles, Mortise dead bolt, Mortise latch and concealed lever action flush bolt is provided to the leading stile edge.

Many other useful options are provided with the door like door closer, smoke seal for air tightness, drop seal at the bottom of the door, any size of rectangular vision window, kick plate and panic bar for fire doors etc.

Applications: -

- 1.Intensive Care Unit
- 2.Doctor Rooms
- 3.Patients Rooms
- 4.Wards
- 5.Clean Rooms
- 6.Sterile Rooms
- 7.Changing Room
- 8.College, School and Office Rooms





AUTOMATIC SLIDING DOOR CONTROLLER SPECIFICATION

- Door Configuration :- Single Leaf
- Limited Weight :- Up To 220 kg
- IDoor Leaf Width :- 800 - 2000MM
- Power Voltage :- AC 200 - 250 V, 50 - 60 Hz
- Power Consumption :- ≤ 90 W
- Manual Force :- ≤ 40 N. ≤ 50 N
- Sensor Mode :- Various
- Sliding Noise :- ≤ 55 Db
- Environment Temp. :- 20+50C


INSULATED PUFF PANEL

- Hikom PUFF (Polyurethane Foam) Insulated panels are having different types of skins i.e.

Pre-Coated Galvanized Sheets
Stainless Steel Sheet

Aluminum Sheets
Plain Galvanized Sheets

- Hikom OT Panels & Glass Panels.
- Floor Panels (Ply & alimunim chequered sheets).
- Panels are manufactured by using Polyurethane Insulation, which adhered to the interior of skin layers providing increased structural strength.
- All panels have tongue and groove construction of Cam-Lock fastening system.
- Consisting of hooked locking arms on one side and end of panels connected by plastic hook to match lock in pins on the other side of the panel (Metal Cam-Lock are also available on demand).
- Panels are conveniently assembled at site and the joining and disassembling of the panels is done by using an Allen Key Tool.

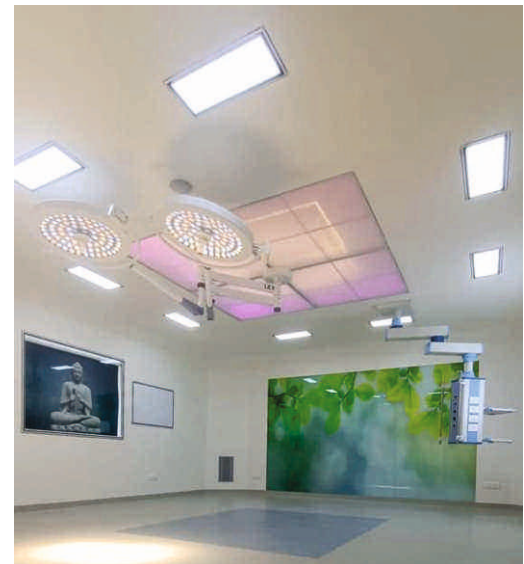



HIKOM INTERNATIONAL LLP



📍 *Plot No.-141, Udyog Kendra-1, Echotech-III,
Khera Choganpur, Greater Noida , Gautambuddha Nagar-201318*

🌐 *<https://Hikom.in>*

✉ *info@hikom.in*

☎ *+919773989396, +919015055777*

