TABLE 1 SEE NOTE 2

PART IDENTIFICATION NUMBER	NOMENCLATURE	APPLICABLE MATERIAL
5377632	SEAL-AIR,LPC,1STAGE	M810053

REVISION STATUS				
SHEET No.	1	2	3	4
LATEST REVISION	△A	△A	△A	△A

TABLE 2 SEE NOTE 18

JAEC SPECIFICATION	EQUIVALENT P&W SPECIFICATION
JS-P-4002	PWA 79345
J-PWA 830	PWA 830
J-PWA 310	PWA 310
J-VIS-MASTER	VIS-MASTER
J-VIM-MASTER	VIM-MASTER
J-FPS-MASTER	FPS-MASTER
J-ISAJT-A002	FPM-MASTER
	FPM-MASTER SUPPLEMENT
J-ISAJT-A002 GRADE 3	FPM-CODE-2
J-ISAJT-A002 GRADE 5	
J-PWA 36303	PWA 36303
J-ISAJT-D008	PWA-36521
J-ISAJT-D007	AMS2471
	PWA-S-2471
J-PWA 388	PWA 388
J-PWA 367	PWA 367
JS-P-0001	PWA 370
	PWA 367
J-ISAJT-C003	PWA 11
J-PWA 79360	PWA 79360

△A 19. AFTER ANODIZE PER NOTE 10 AND PRIOR TO COATING PER NOTE 11, ADDITIONAL GRIT BLAST ON AREA BC PER SPEC. AC IS ALLOWED. SPECIAL PROCESS CERTIFICATE OF GRIT BLAST IS NOT REQUIRED.
AFTER THE GRIT BLAST, THE BLASTED SURFACE SHALL HAVE ELECTRIC CONDUCTIVITY.

18. JAEC SPECIFICATIONS CALLED OUT ON THIS SHEET MAY BE REPLACED BY THE PWA SPECIFICATIONS IN ACCORDANCE WITH TABLE 2 (C1-1).

17. THIS PART IS CRITICAL TO QUALITY. KEY PRODUCT CHARACTERISTICS ARE CONTROLLED PER SPEC. AB .

16. PRIOR TO ANODIZE PER NOTE 10, MARK "X" AS SPECIFIED IN AREA CB (B9-3) AND IDENT NUMBER AND MANUFACTURER'S TRACEABILITY NUMBER NEXT TO "X" PER SPEC. AA METHOD 3.2.5.1 OR 3.2.5.2 OR 3.2.15.3.
AFTER EPOXY PRIMER COATING PER NOTE 12, MARK "X" AS SPECIFIED IN AREA CB AND IDENT NUMBER AND MANUFACTURER'S TRACEABILITY NUMBER NEXT TO "X" PER SPEC. AA METHOD 3.2.6.
EVIDENCE OF MARKING UNDER EPOXY PRIMER COATING IS PERMITTED.

15. CHIPS ON COATING SURFACE PERMITTED IN AREA BJ (E5-2) AND BK (E7-2).
IF FOLLOWING CONDITIONS ARE MET.
-DEPTH NOT MORE THAN 0.5
-TOTAL IMPERFECTION CIRCUM. LENGTH NOT MORE THAN 110
-SPACING BETWEEN CHIPS NOT LESS THAN 51
-NO BASE METAL EXPOSURE
-NO COATING FLAKING

14. VISUAL INSPECTION PER SPEC. W WITH LIMIT SPEC. Y PRIOR TO AND AFTER EPOXY PRIMER COATING PER NOTE 12. NO BURR AND DEPOSITE PERMITTED ON SURFACE.

13. PRIOR TO ANODIZE PER NOTE 10, FLUORESCENT PENETRANT INSPECTION PER SPEC. U GRADE 3 OR 5 WITH LIMIT SPEC. V .

△A 12. TREAT PER SPEC. P -E (EPOXY PRIMER) AT AREA BL (J8-2) AFTER COATING PER NOTE 11.
COATING MATERIAL SPEC. R SHALL BE USED. THICKNESS SHALL BE 0.01 TO 0.04.
THICKNESS REQUIREMENT WAIVED IN CYLINDRICAL SURFACE OF ANY THRU HOLES AND BOLT HOLE CHAMFER, BUT COMPLETE COVORAGE IS REQUIRED.
COATING SHALL BE CAPABLE OF MEETING TAPE TEST REQUIREMENT FOR ADHESIVE AS FOLLOW.
-USE TAPE PER SPEC. T TYPE I CLASS A.
-BONDED AND NO SEPARATION FROM COATED SURFACE AFTER TAPE TEST.
-SEPARATION OF LIGHT POWDERY DEPOSIT IS PERMITTED.

△A 11. COAT AREA BC (J5-2) PER SPEC. K -1. TEMPERATURE DURING HEAT TREATMENT SHALL BE AT 268°C ± 8°C. DURATION OF HEAT TREATMENT SHALL BE 5 TO 6.5 HOURS.
LOSS OF ANODIZE LAYER DUE TO SURFACE PREPARATION IS PERMITTED.
AFTER HEAT TREATMENT, DISCOLORATION ON ANODIZED SURFACE IS PERMITTED.
AFTER HEAT TREATMENT, ADDITIONAL HEAT TREATMENT AT HIGHER THAN 260°C IS NOT PERMITTED.
SUBSTITUTE SPEC. L, SPEC. M AND SPEC. N PERMITTED FOR SPECS LISTED IN SPEC. K SECTION 3.1.

△A 10. PRIOR TO COATING PER NOTE 11, ANODIZE ALL OVER SURFACE PER SPEC. E . SEAL PER SPEC. J .
THICKNESS SHALL NOT EXCEED 0.008 AND COMPLETE COVERAGE IS REQUIRED.

△A 9. DIMENSIONS WITH "*" (E2-2,F4-2,G4-2,K4-2,E5-2,E7-2,E10-2,F10-2) MAY APPLY AFTER HEAT TREATMENT PER NOTE 11 AND PRIOR TO EPOXY PRIMER COATING PER NOTE 12. NOTE 7 IS NOT APPLIED TO THOSE DIMENSIONS.

△A 8. DIMENSIONS WITH "∇" (F7-2,M4-2,M9-2) APPLY PRIOR TO HEAT TREATMENT PER NOTE 11. THESE DIMENSIONS APPLY WHEN DATUM A, B AND D MAINTAIN IN ▱ 0.1, ○ 0.132 AND ○ 0.13 RESPECTIVELY.
CONSTRAINT WITHIN TOLERANCE IS ALLOWED ON DATUM A, B AND D. NOTE 7 IS NOT APPLIED TO THESE DIMENSIONS.

7. UOS ALL DIMENSIONS MAY APPLY WHEN DATUM B (D9-2) AND D (E4-2) MAINTAIN IN A CLEARANCE ENVELOPE Ø 827.19 AND Ø 830.99 RESPECTIVELY.
CONSTRAINT WITHIN TOLERANCE ALLOWED ON DATUM A (A7-2).

6. DIMENSIONAL REQUIREMENTS (GENERAL) :
UOS ALL DIMENSIONS APPLY BEFORE ANODIZE PER NOTE 10.
UOS ALL DIMENSIONS IN MILLIMETERS.
UOS TOLERANCE ON DIMENSIONS ± 0.25.
UOS TOLERANCE ON ANGLE ± 2° .
UOS SURFACE TEXTURE 3.2 IN MICROMETERS PER SPEC. H .
UOS BREAK SHARP EDGE 0.1 TO 0.5.
UOS CORNER RADII R 0.3 TO 0.5.

5. PROCESS VALIDATION APPROVAL REQUIRED PER SPEC. F .
ENGINEERING CONTROLLED PROCESS PER SPEC. G .

△A 4. AFTER HEAT TREATMENT PER NOTE 11.
HARDNESS SHALL BE MEASURED IN AREA CJ (N17-3) AFTER ANODIC COATING REMOVAL BY POLISHING.
HARDNESS SHALL NOT BE LESS THAN 47.7 HRB OR EQUIVALENT. AFTER HARDNESS MEASUREMENT, BLEND AREA CJ SMOOTHLY AND CONTINUOUSLY TO ADJACENT SURFACES TO REMOVE THE DIMPLE BY HARDNESS MEASUREMENT AND VISUALLY INSPECT THE BLENDED AREA PER SPEC. W .
TOTAL DEPTH OF POLISHING AND BLEND SHALL NOT EXCEED 0.25. TOUCH UP PER SPEC. E PARA. 3.3.3 ON AREA CJ. TOUCHING UP MAY EXTEND 5 MILLIMETERS BEYOND AREA CJ.

3. HEAT TREAT PRIOR TO FINISH MACHINING PER SPEC. D -33BC AT 282°C ± 5°C FOR 3.75 TO 4.5 HOURS IN AIR. HEAT TREAT TEMPERATURE REFER TO METAL TEMPERATURE.
RAMP RATE (HEAT UP AND COOL DOWN) SHALL NOT EXCEED 111°C PER HOUR.
TENSILE TEST PER SPEC. D IS NOT REQUIRED.

2. PRIOR TO HEAT TREATMENT PER NOTE 3, MATERIAL MUST CONFORM TO SPEC. C (AL2219T851).
FORGING MATERIAL TO TABLE 1 (A1-1).

NOTE. 1. SHALL CONFORM TO SPEC. A AND SPEC. B EXCEPT A3.2.2 (INTERPRETATION OF DRAWING).

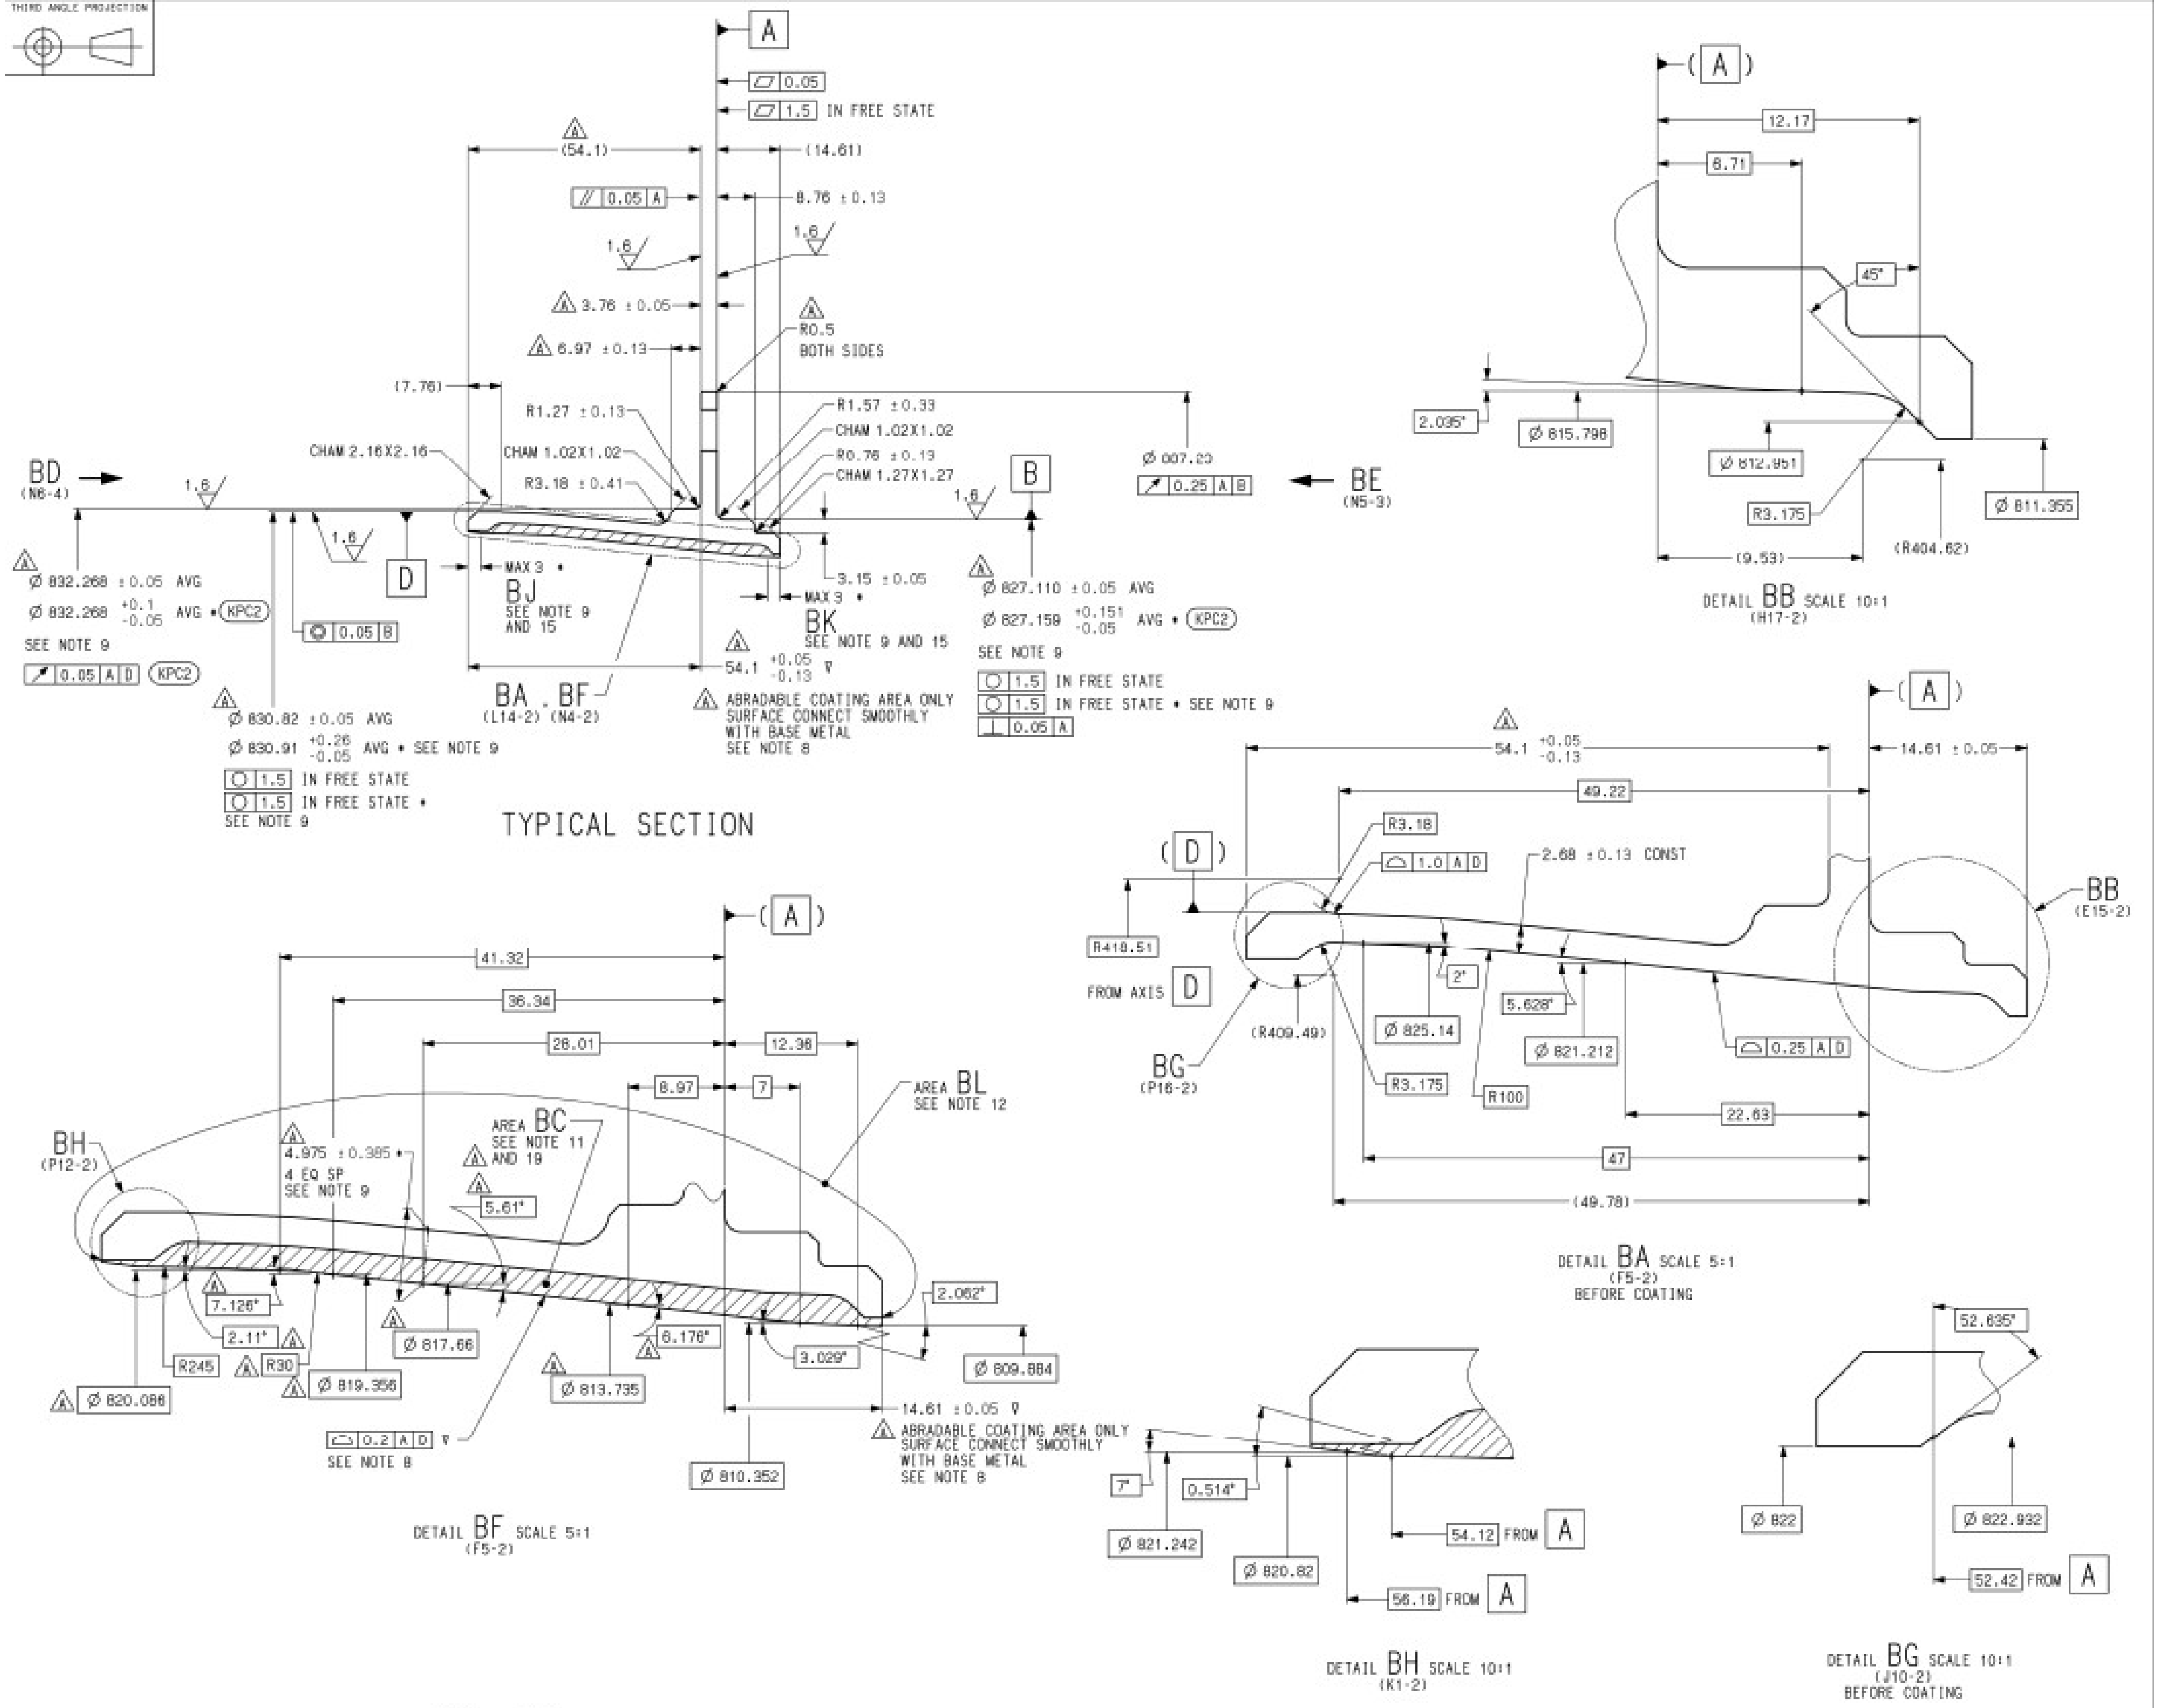

DESIGNATION LETTERS ORIGINATED ON THIS SHEET BA THRU BL .

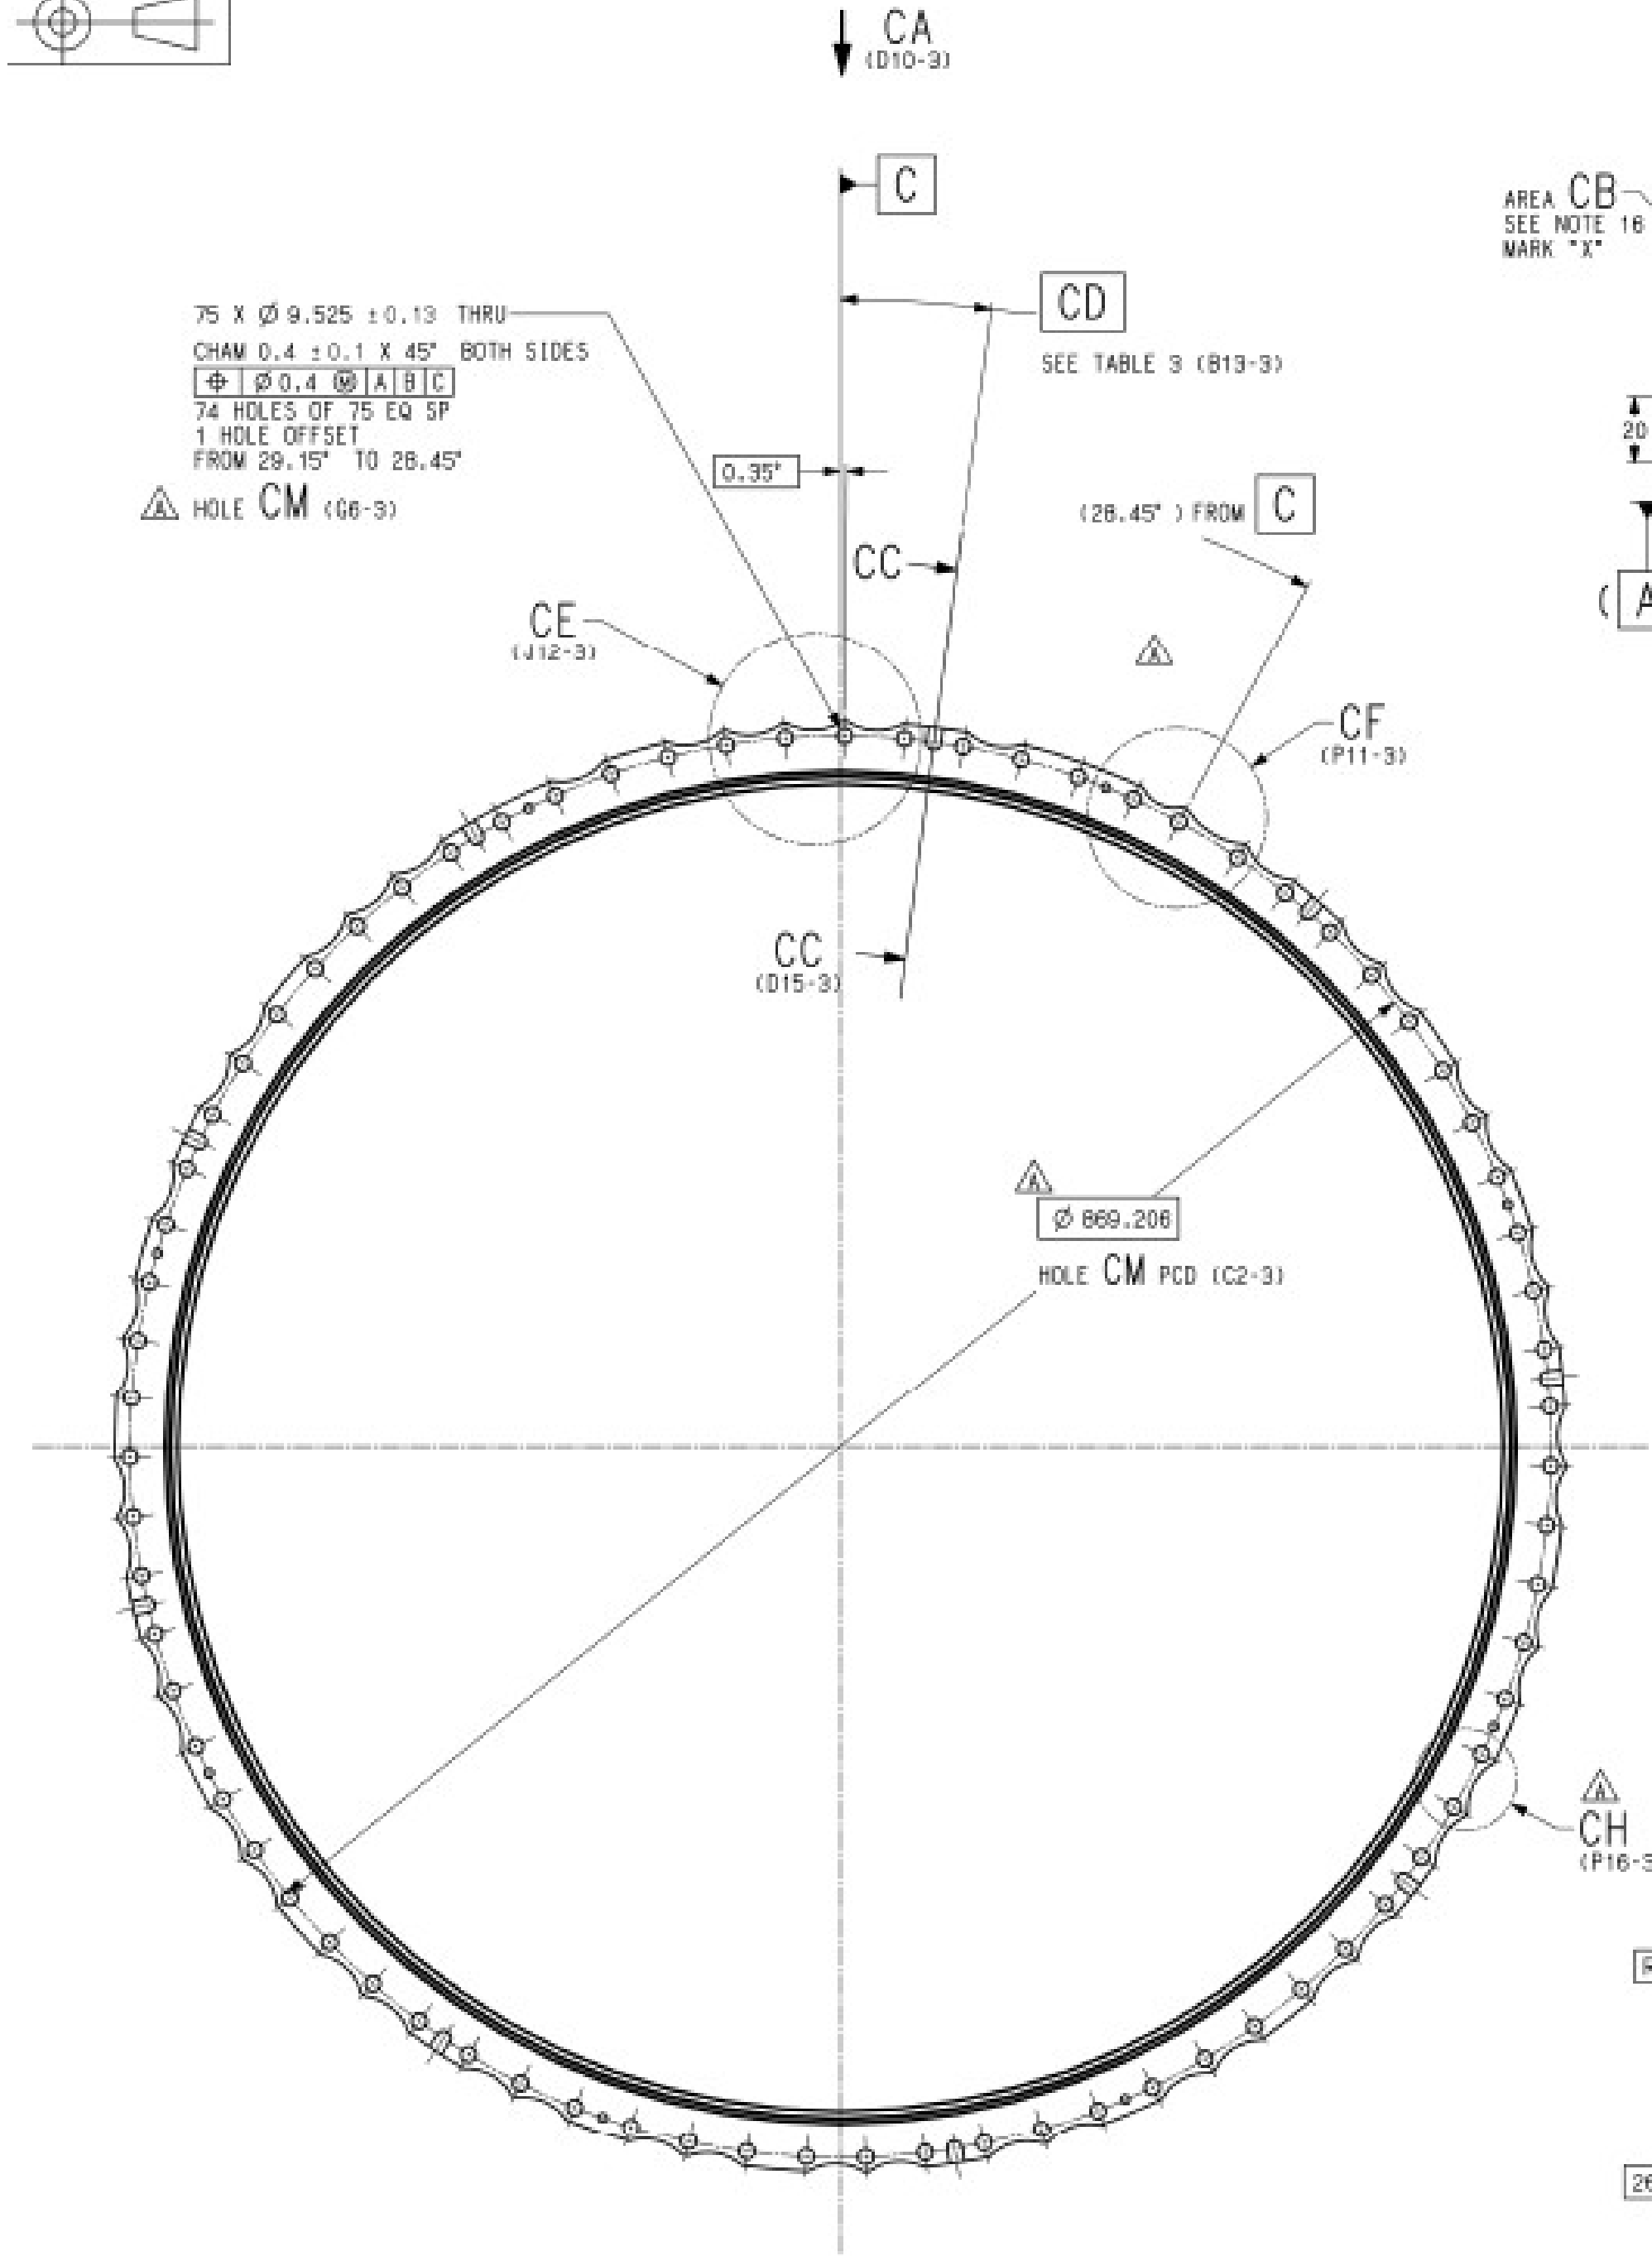

VIEW BE SCALE 1:2
(D11-2)

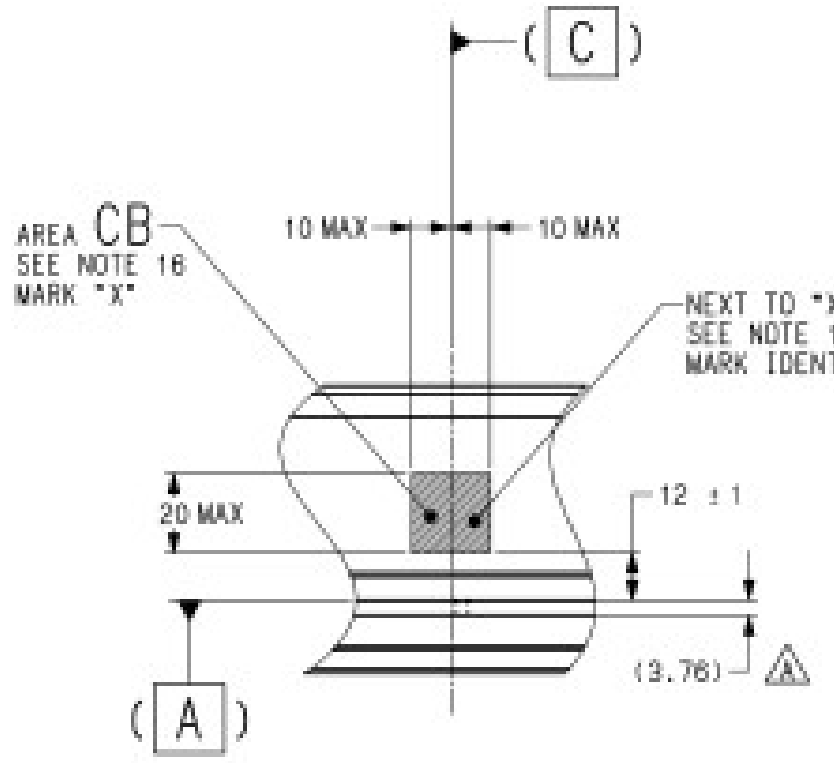

VIEW CA SCALE 1:1
(A5-3)

TABLE 3

CD (B6-3)
7.55°
41.15°
84.35°
127.55°
170.75°
213.95°
257.15°
295.55°
329.15°

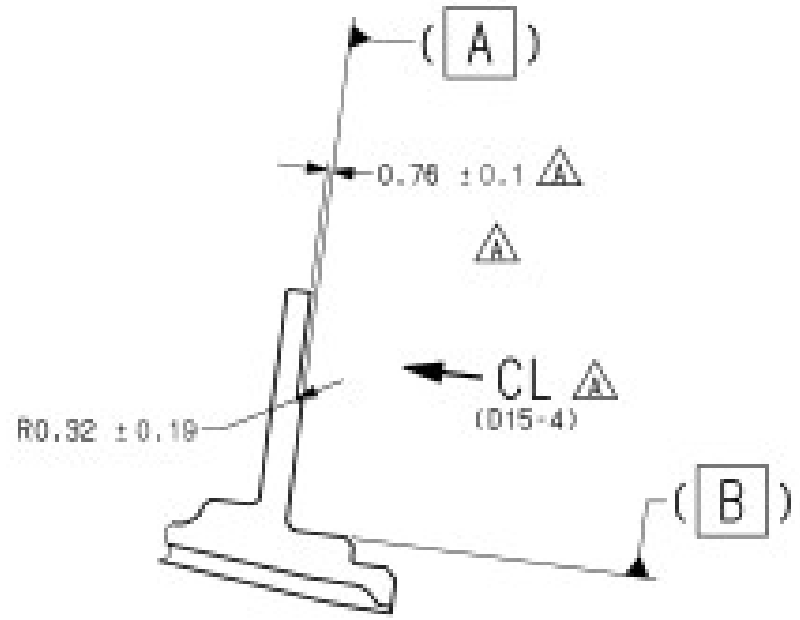

SECTION CC-CC SCALE 2:1
(F5-3)
9 PLACES

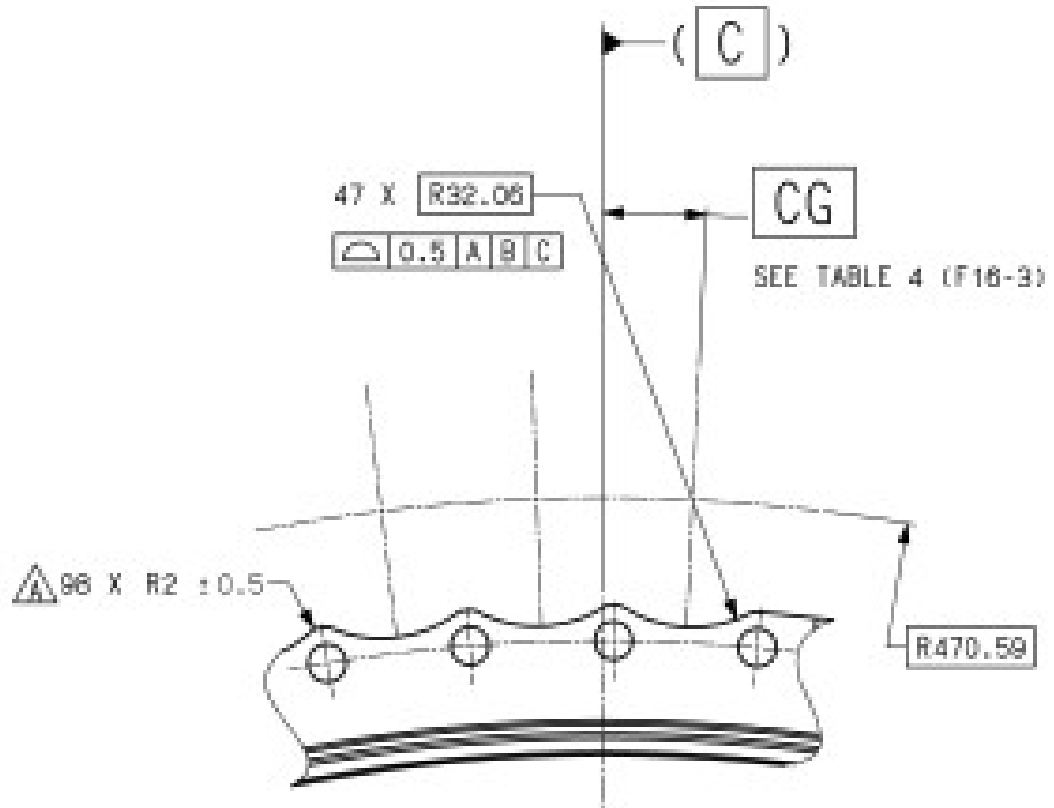

DETAIL CE SCALE 1:1
(D3-3)

TABLE 4

CG (F13-3)	
2.75°	189.95°
12.35°	194.75°
36.35°	204.35°
45.95°	209.15°
50.75°	218.75°
60.35°	223.55°
65.15°	233.15°
74.75°	237.95°
79.55°	247.55°
89.15°	252.35°
93.95°	261.95°
103.55°	266.75°
108.35°	276.35°
117.95°	281.15°
122.75°	290.75°
132.35°	300.35°
137.15°	305.15°
146.75°	314.75°
151.55°	319.55°
161.15°	324.35°
165.95°	338.75°
175.55°	348.35°
180.35°	353.15°
	357.95°

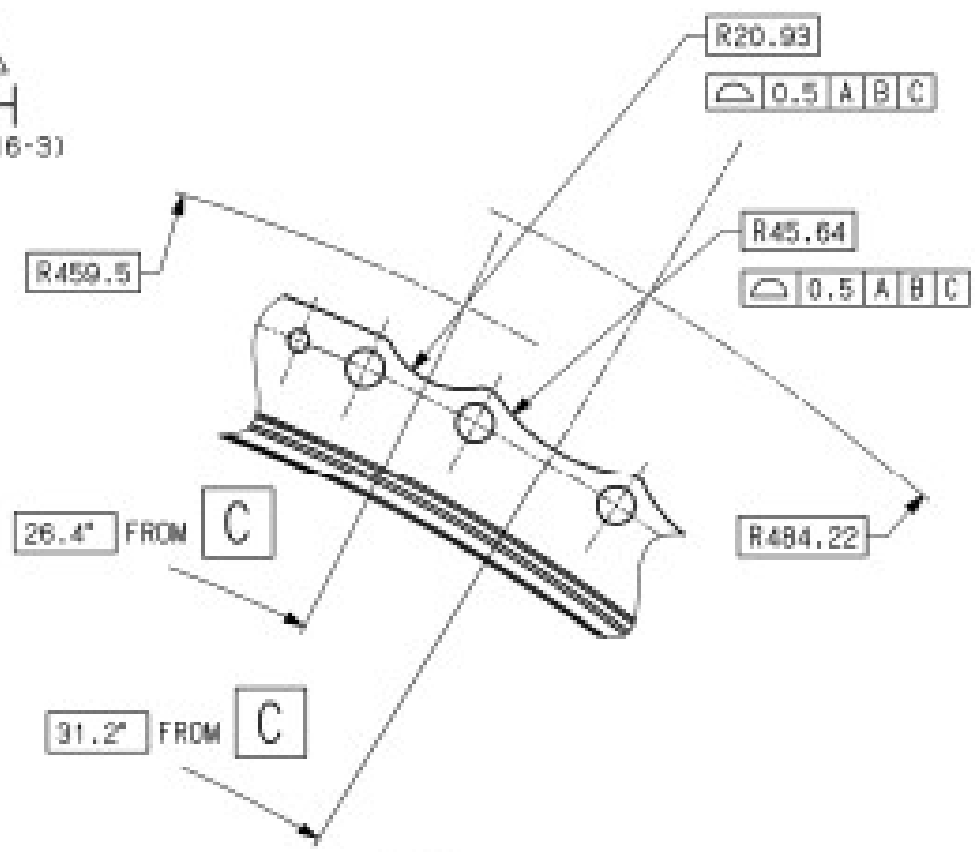

DETAIL CF SCALE 1:1
(E8-3)

TABLE 5

CK (M17-3)
117.95°
237.95°
357.95°

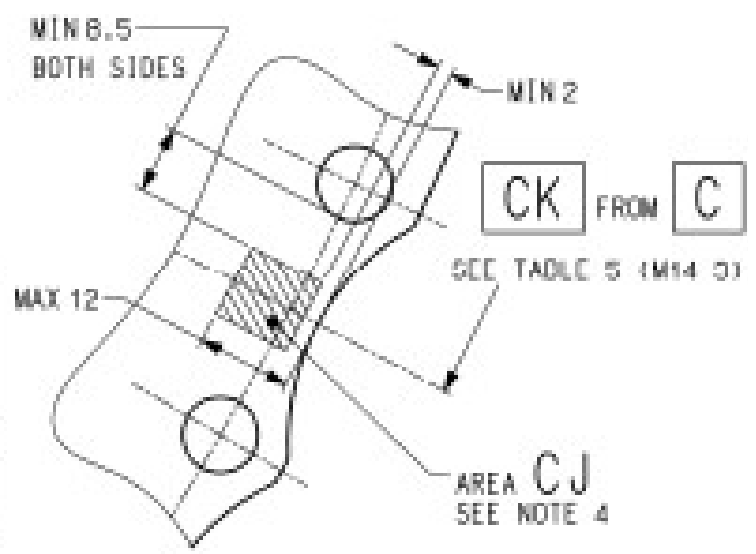

DETAIL CH SCALE 2:1
(K9-3)
3 PLACES

DESIGNATION LETTERS ORIGINATED ON THIS SHEET CA THRU CM .



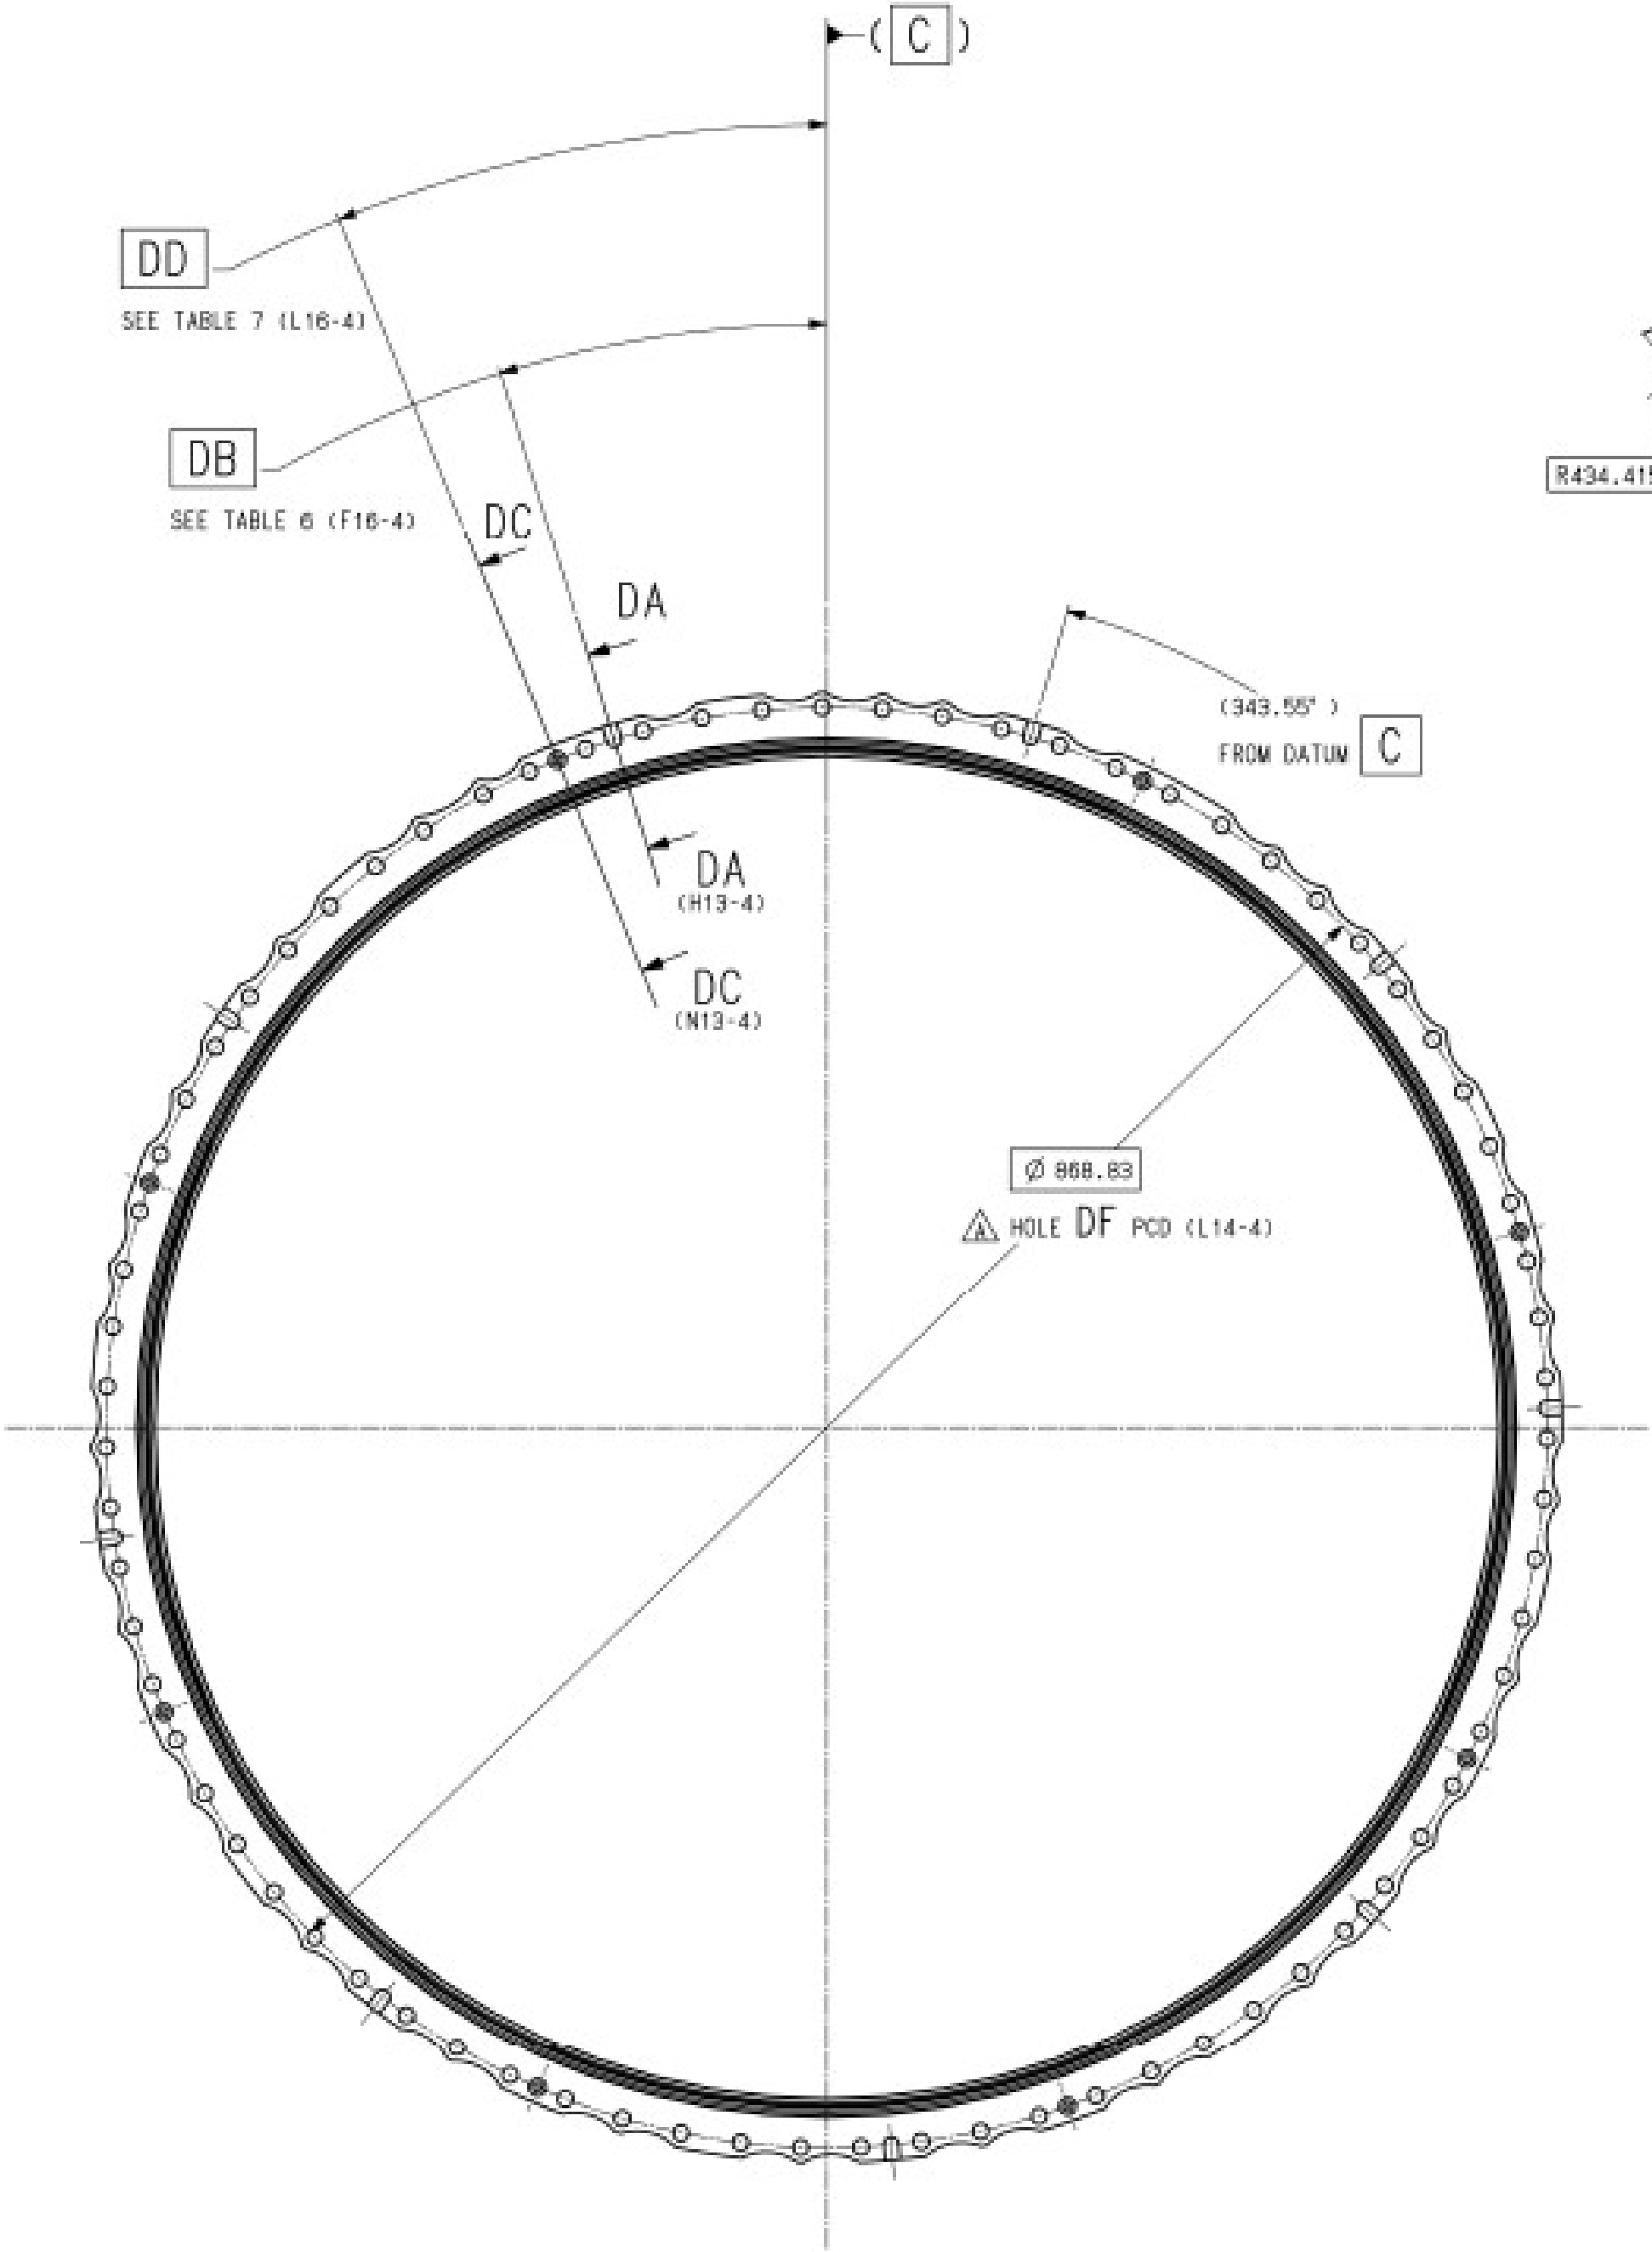

VIEW BD SCALE 1:2
(D1-2)

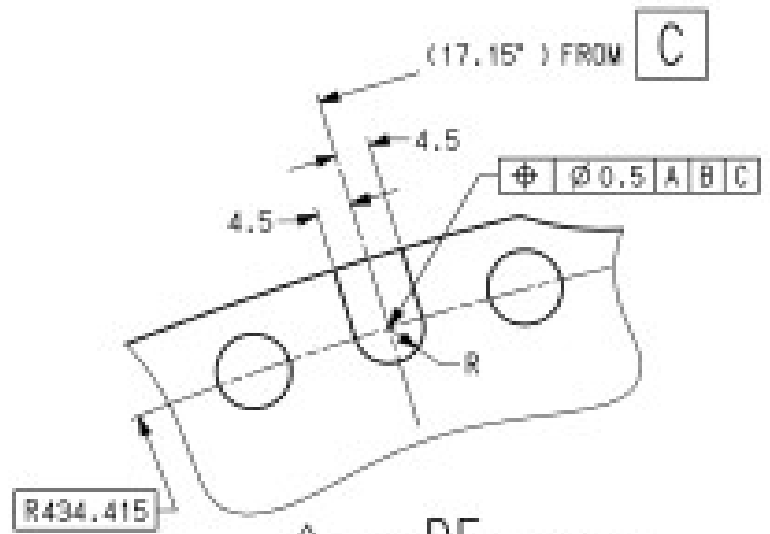

VIEW DE SCALE 2:1
(G12-4)
9 PLACES

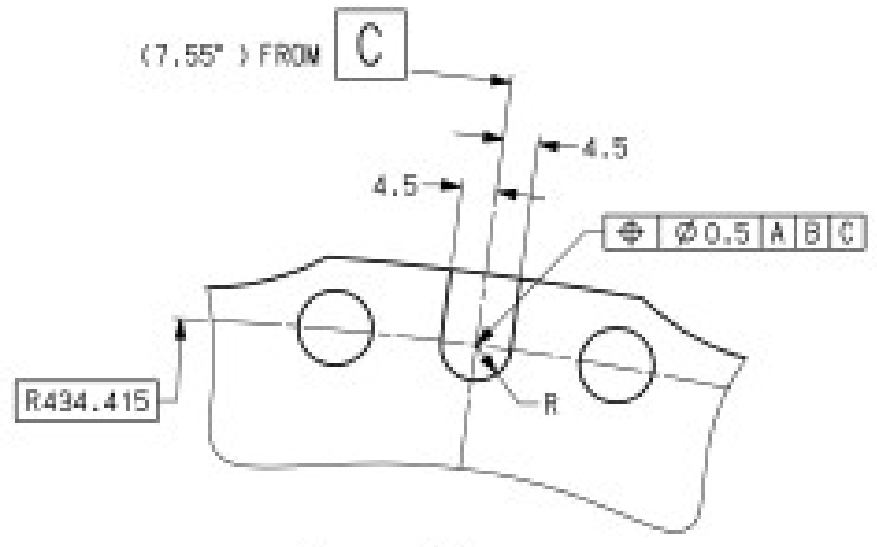

VIEW CL SCALE 2:1
(C16-3)
9 PLACES

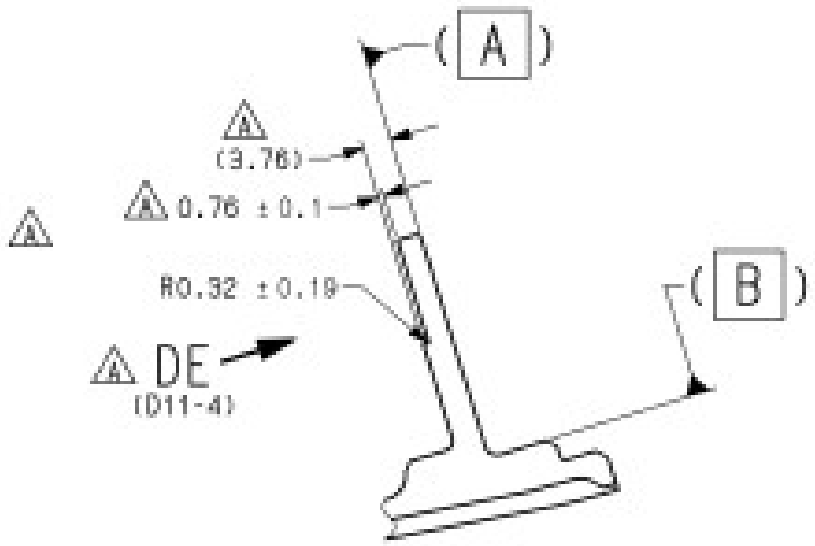

SECTION DA-DA SCALE 2:1
(F5-4)
9 PLACES

TABLE 6

DB
(D2-4)
17.15°
55.55°
98.75°
141.95°
185.15°
228.35°
271.55°
309.95°
343.55°

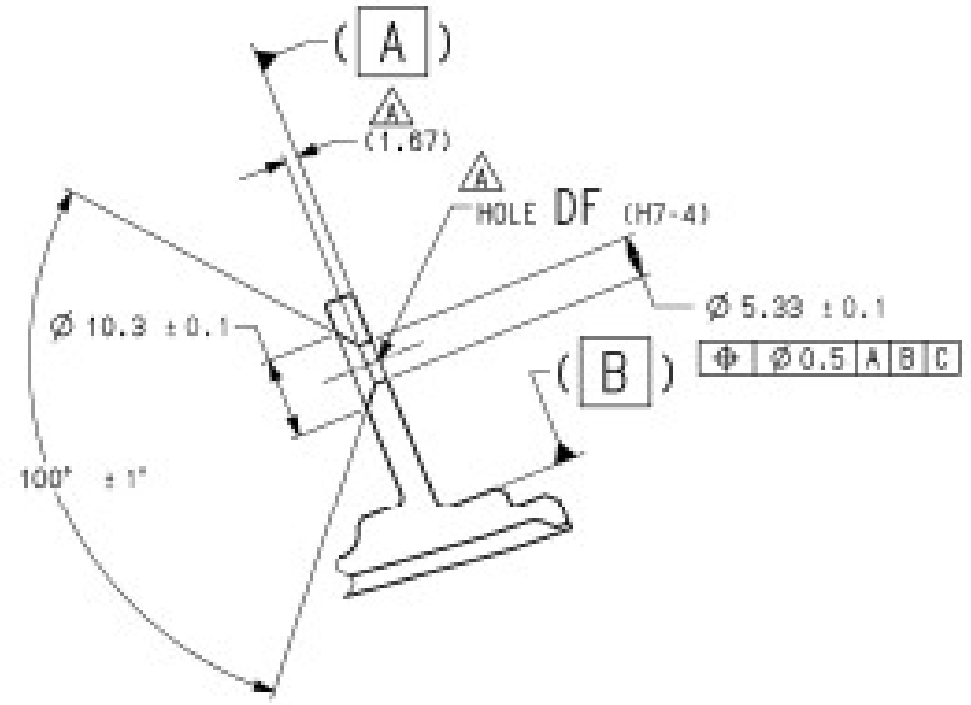

SECTION DC-DC SCALE 2:1
(G5-4)
8 PLACES

TABLE 7

DD
(C2-4)
21.95°
69.95°
113.15°
156.35°
199.55°
242.75°
285.95°
333.95°

DESIGNATION LETTERS ORIGINATED ON THIS SHEET DA THRU DF .