

[illegible]

LOC. REF.	ITEM No.	ASSEMBLY No./OR PART No.	NOMENCLATURE	QTY. REQ'D	APPL. /CABLE MATERIAL	WATERING		WET CALCULATED WEIGHT kg.
						SPEC.	USE REF. No.	
01-2	1	5377631-01	CASE ASSY OF-LPC, REAR	—				
01-2	2	5377631-02	CASE-LPC, REAR	—	5377551			
1-2-A	3	5377626	INSERT-SCREW THREAD	9				
1-2-7	4	NAS1130-5F-10	INSERT-HELICAL COIL, 3125-24	1				
RD-7	5	NAS1130-5F-10	INSERT-HELICAL COIL, 3125-24	1				
MS-9	6	NAS1130-6F1.10	INSERT-HELICAL COIL, 250-28	12				
ASB-8	7	5377636	INSERT-SCREW THREAD	8				

13. CHIPS ON COATING SURFACE PERMITTED IN AREA CF (JB-3)
AFTER FINAL MACHINING, IF FOLLOWING CONDITION IS MET.
- DEPTH NOT MORE THAN 0.5mm
 - TOTAL IMPERFECTION CIRCUM. LENGTH NOT MORE THAN 110mm
 - SPACING BETWEEN CHIPS NOT LESS THAN 51mm
 - NO BASE METAL EXPOSURE
 - NO COATING FLAKING
 - NOT MORE THAN 4 LOCATIONS

12. DIMENSIONS MARKED WITH [CICR] SHALL BE CONTROLLED UNDER INTERFACE CONTROL DRAWING CONCURRED WITH PARTNERS. INCH IS IN THE BRACKETS.
11. APPLY ZINC MOLYBDATE PRIMER PER [SPEC. AB] ON ITEM 2 MATING SURFACE TO ITEM 2 TO R BEFORE INSTALLATION AND ON SURF GD (L7-7), GE (C1-7), INSTALL ITEM 4 TO 6 WHILE ZINC MOLYBDATE PRIMER IS STILL WET.
10. BOND ITEM 3 AND 7 TO ITEM 2 PER [SPEC. W] USING [SPEC. Y] -1 EXCEPT CURING AT ROOM TEMP FOR 8 HRS MIN PRIOR TO HANDLING. PRIOR TO BONDING, CLEAN BONDING SURFACE OF ITEM 2 PER [SPEC. AA] -A4 AND CLEAN MATING SURFACE OF ITEM 3 AND ITEM 7 PER [SPEC. AA] -C4. REMOVE EXCESS AFTER INSTALLATION.
9. MARK IDENT AS SPECIFIED IN AREA BF (DB-2), PER [SPEC. V] METHOD 3.2.5.1 OR 3.2.5.2 OR 3.2.15.3. SERIAL NO. REQUIRED. MARKINGS INCLUDE 2D MATRIX SYMBOL PER [SPEC. V] METHOD 3.2.15.3.
- MARK HOLE NO. IN AREA LB (A2-11) AND AREA LD (B16-11) SPECIFIED IN TABLE 10 (K9-11) AND 11 (K16-11) PER [SPEC. V] METHOD 3.2.5.1 OR 3.2.5.2 OR 3.2.15.3.
8. COAT AREA CA (B6-3) PER [SPEC. P] WITH [SPEC. R] WITH THE FOLLOWING EXCEPTION. SUBSTITUTE BOND COAT [SPEC. T] AND TOP COAT [SPEC. U] PERMITTED.
7. ANODIZE ITEM 2 ALL OVER SURFACE PER [SPEC. M] AND SEAL PER [SPEC. N] . THICKNESS SHALL BE 0.005 TO 0.015.
- ANODIZE FILM IN AREA CA (B6-3) MAY BE REMOVED BY BLASTING PER NOTE 6.
6. VISUAL INSPECT PER [SPEC. J] WITH LIMIT [SPEC. K] AND [SPEC. L] . NO BURR AND DEPOSITE PERMITTED ON ITEM 2 SURFACE.
5. FLUORESCENT PENETRANT INSPECT ITEM 2 PER [SPEC. G] GRADE 7 WITH LIMIT [SPEC. H] PRIOR TO ANODIZE PER NOTE 7 AND PRIOR TO COATING PER NOTE 8.
4. UNLESS OTHERWISE SPECIFIED :
- A) ALL DIMENSIONS IN MILLIMETERS, INCH IS IN THE BRACKETS.
- B) ALL DIMENSIONS APPLY BEFORE ANODIZE PER NOTE 7.
- C) ALL DIMENSIONS APPLY WHEN DATUM [A] (F14-2) AND [B] (E3-2) MAINTAIN IN A CLEARANCE ENVELOPE Ø 792.31 AND Ø 826.67 RESPECTIVELY AND DATUM [C] (A13-2) IS CONSTRAINT WITHIN TOLERANCE.
- D) TOLERANCE ON DIMENSIONS ± 0.25.
- E) TOLERANCE ON ANGLE ± 2°.
- F) SURFACE TEXTURE R_a IN MICROMETERS PER [SPEC. E] .
- G) BREAK SHARP EDGE 0.1 TO 0.5.
- H) CORNER RADII R 0.3 TO 0.5.
- J) THREAD MUST CONFORM TO [SPEC. F] .
3. PROCESS VALIDATION APPROVAL REQUIRED PER [SPEC. C] . ENGINEERING CONTROLLED PROCESS PER [SPEC. D] .
2. FORGING MATERIAL OF ITEM 2 TO TABLE 1 (A1-1), BLIND ZONE OF ULTRASONIC INSPECTION MUST BE REMOVED FROM FORGING MATERIAL.
1. SHALL CONFORM TO [SPEC. A] AND [SPEC. B] EXCEPT A3.2.2 (INTERPRETATION OF DRAWING).

AD	81-1		AMS4144
AC	81-2	JS-P-4002	
AB	D12-1		AMS3117
AA	112-1	J-PWA 03	
Y	E14-1		PWA 36003
W	E14-1	J-PWA 615	
V	112-1	J-PWA 310	
U	G14-1		PWA 1349
T	G14-1		PWA 1337
R	G14-1	J-ISAIT-0015-490	
P	G13-1	J-15AJT-06115	
N	H15-1	J-15AJT-06009	
M	H14-1	J-15AJT-06007	
L	H14-1	J-V15-2447	
K	H14-1	J-V15-MA5128	
J	H13-1	J-VIM-MA5128	
H	J17-1	J-FPS-MA5128	
G	J14-1	J-15AJT-4002	
F	H14-1	J-PWA 395	
E	L14-1	J-PWA 388	
D	H14-1	J-PWA 387	
C	M14-1	JS-P-0001	
B	H13-1	J-PWA 79360	
A	H12-1		AGE 114.58-199
LOCAL	ZONE		

NON-DESTRUCTIVE TEST INSP.		NOTE 5
MATERIAL	SPEC.	NOTE 2



HEAT TREATMENT		_____
IDENTITY MARKINGS		NOTE 9
SCREW THREADS		_____
SURFACE TEXTURE		NOTE 4
DRAWING PRACTICE AND TOLERANCE INTERPRETATION		NOTE 1
GENERAL SPECIFICATIONS		JAEF OTHERS

THIS DRAWING HAS BEEN PREPARED BY JAEF AND/OR OTHERS EMPLOYED BY LARSEN.


USE THE FOLLOWING IN PREPARING DIMENSIONS:

ASSUMPTIONS OF UNDESIRABLE INFORMATION: UNLESS SPEC'ED, USE NEAREST CHINESE AND UNITS CONSIDERED EQUIVOCAL, AT THE NUMBER TO PRECEDE A NUMBER (EQUIVOCAL FORM), UNLESS SPEC'ED, USE JAEF


THIS DRAWING IS THE PROPERTY OF JAEF AND/OR OTHERS EMPLOYED BY LARSEN AND IS NOT TO BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF JAEF AND/OR OTHERS EMPLOYED BY LARSEN. IT IS TO BE KEPT IN A SAFE PLACE AND NOT TO BE LOANED OR GIVEN TO ANY OTHER PERSON. IT IS TO BE KEPT IN A SAFE PLACE AND NOT TO BE LOANED OR GIVEN TO ANY OTHER PERSON. IT IS TO BE KEPT IN A SAFE PLACE AND NOT TO BE LOANED OR GIVEN TO ANY OTHER PERSON.

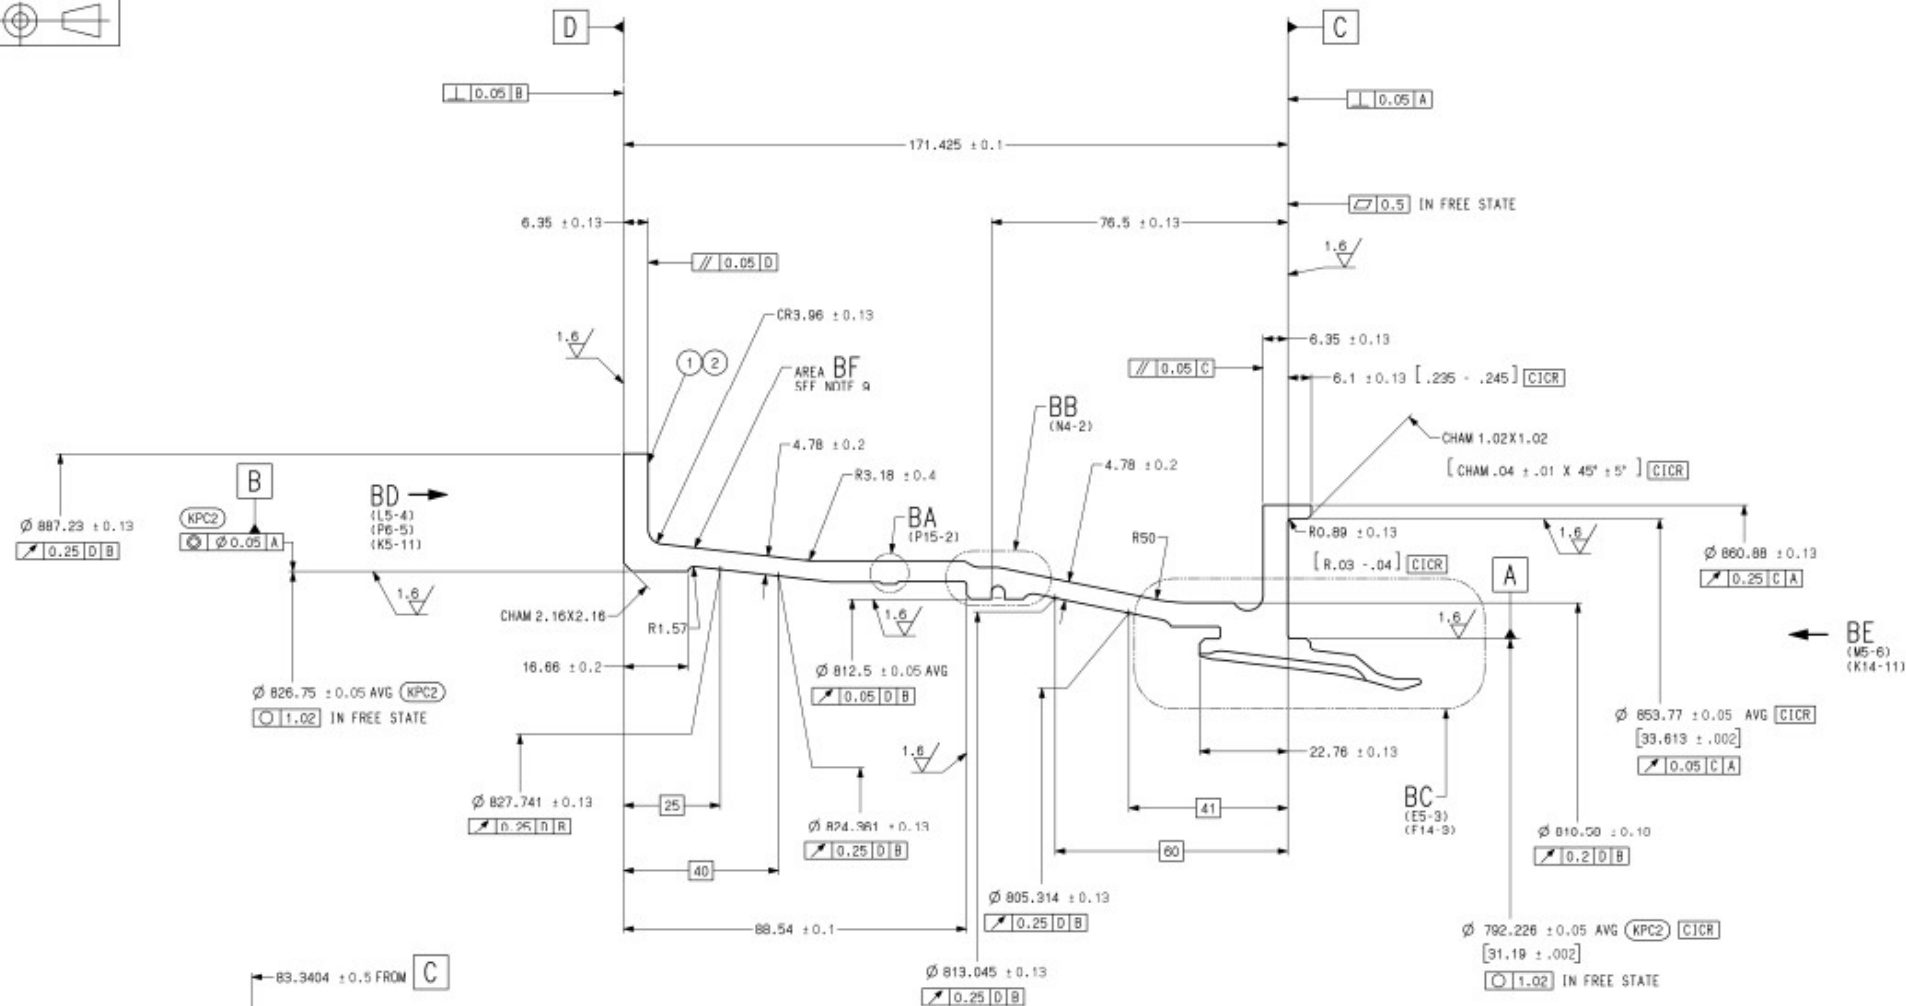


TYPICAL SECTION

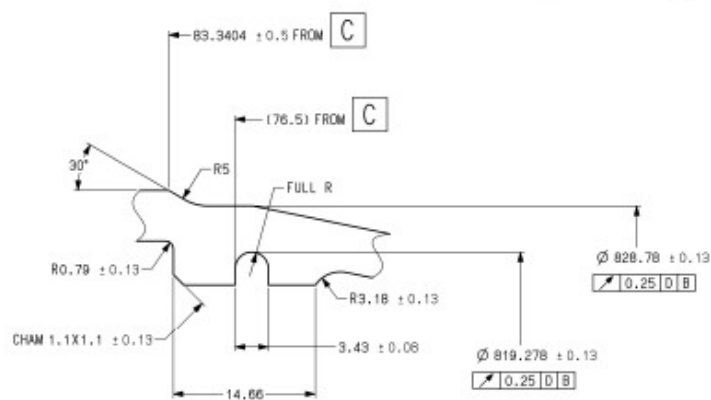


DETAIL BB (D10-2)
SCALE 5:1

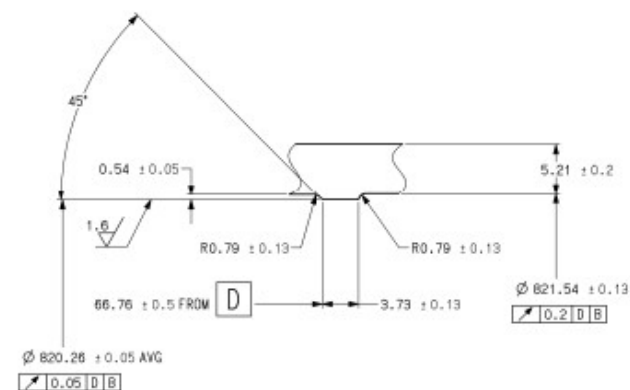


DETAIL BA (E9-2)
SCALE 5:1

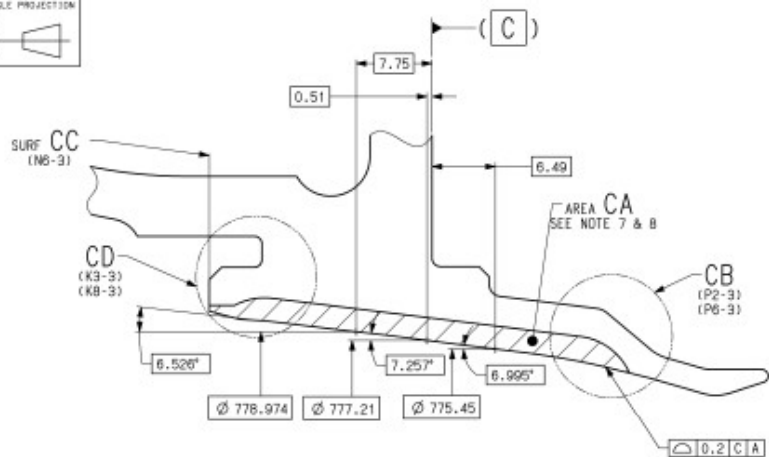

DETAIL BC (H19-2)
SCALE 5:1

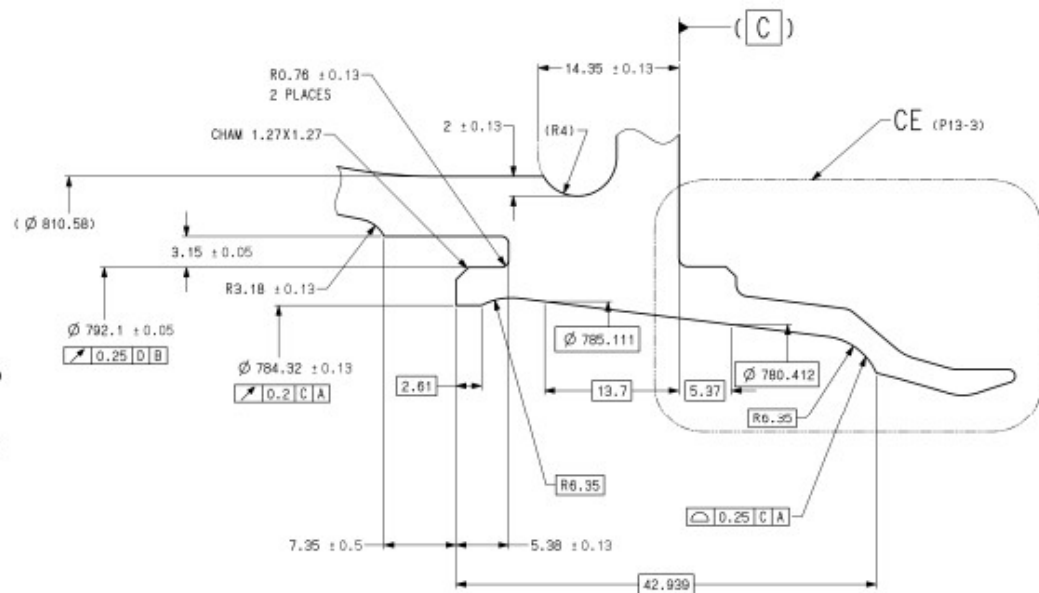


REPEAT DETAIL BC (H13-2)
SCALE 5:1
BEFORE COATING

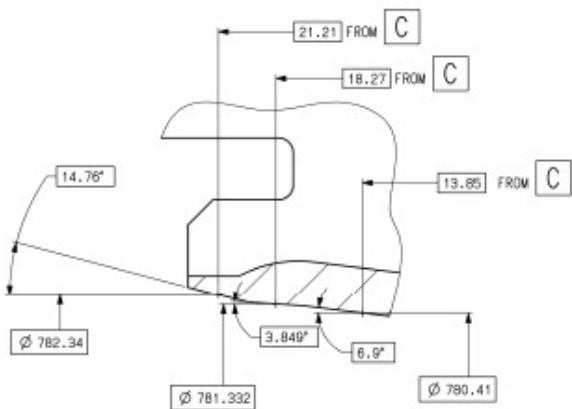

DETAIL CD (C2-3)
SCALE 10:1




REPEAT DETAIL CD (C2-3)
SCALE 10:1

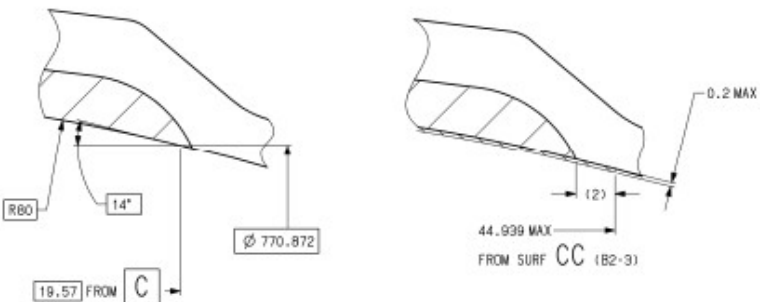






DETAIL CB (C7-3)
SCALE 10:1




REPEAT DETAIL CB (C7-3)
SCALE 10:1

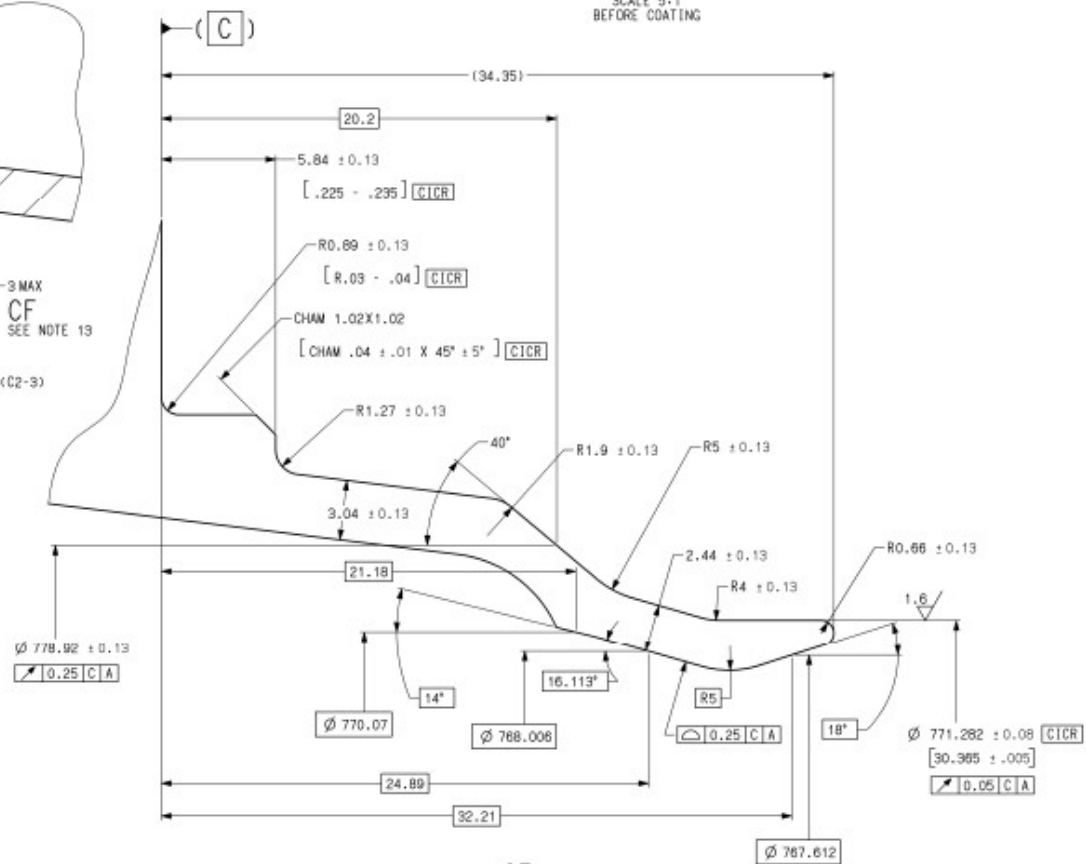


DETAIL CE (B16-3)
SCALE 10:1

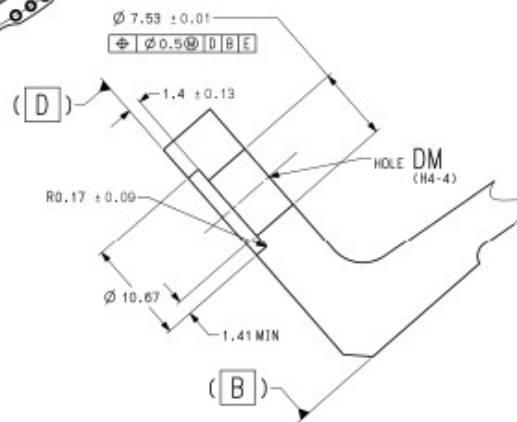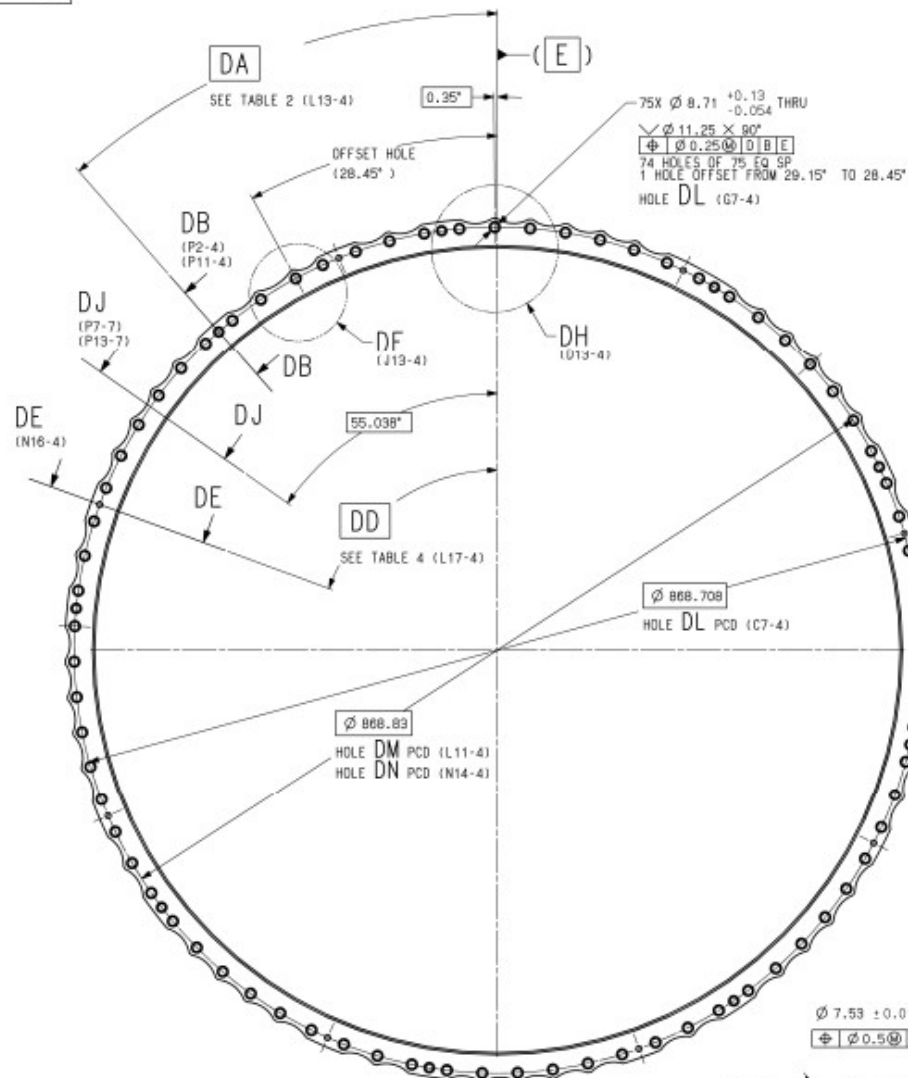

REPEAT SECTION DB-DB (C3-4)
SCALE 5:1
9 PLACES, OMIT ITEM C

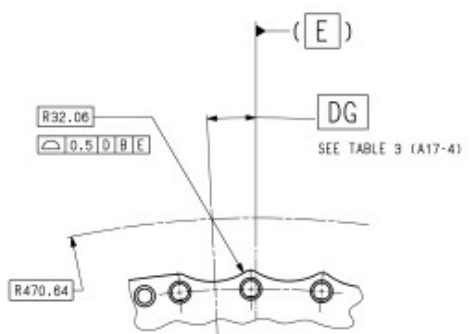


DETAIL DH (D6-4)
SCALE 1:1
58 PLACES

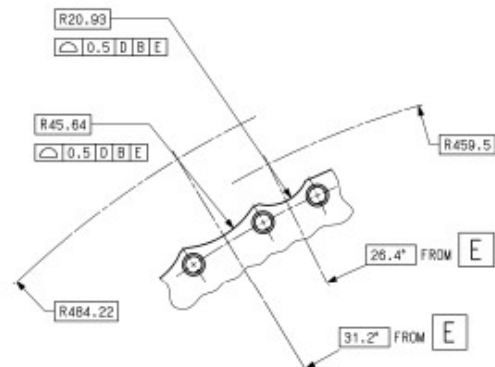

DETAIL DF (D5-4)
SCALE 1:1

TABLE 2

DA
(B3-4)
7.55"
41.15"
04.26"
127.55"
170.75"
213.95"
257.15"
295.55"
329.15"

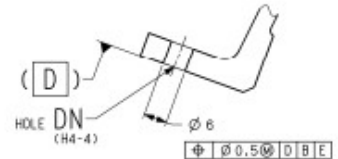

SECTION DE-DE (E1-4)
8 PLACES



TABLE 3

DG
(B14-4)
2.75"
12.35"
17.15"
36.35"
45.95"
50.75"
55.55"
60.35"
65.15"
74.75"
79.55"
89.15"
93.95"
98.75"
103.55"
108.35"
117.95"
122.75"
132.35"
137.15"
141.85"
146.75"
151.55"
161.15"
165.95"
175.55"
180.35"
185.15"
189.95"
194.75"
204.35"
209.15"
218.75"
223.55"
228.35"
233.15"
237.95"
247.55"
252.35"
261.95"
266.75"
271.55"
276.35"
281.15"
290.75"
300.35"
305.15"
309.95"
314.75"
319.55"
324.35"
336.75"
343.55"
348.35"
353.15"
357.95"

TABLE 4


DD
(F4-4)
21.95"
69.95"
113.15"
156.35"
199.55"
242.75"
285.95"
333.95"

DESIGNATION LETTERS ORIGINATED ON THIS SHEET DA THRU DN.

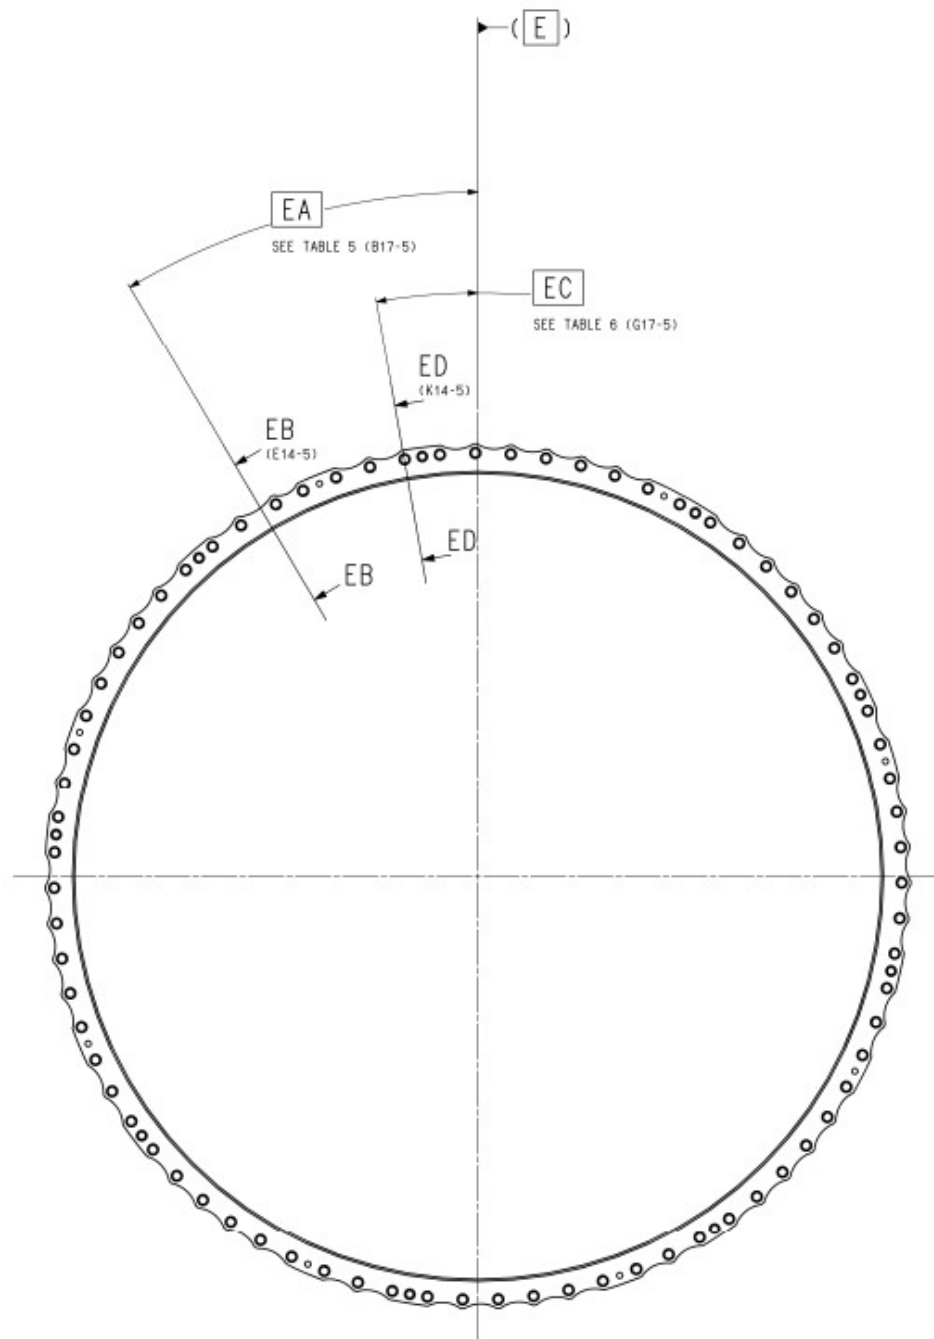

REPEAT VIEW BD (E4-2)
SCALE 1:2


DESIGNATION LETTERS ORIGINATED ON THIS SHEET EA THRU EE.

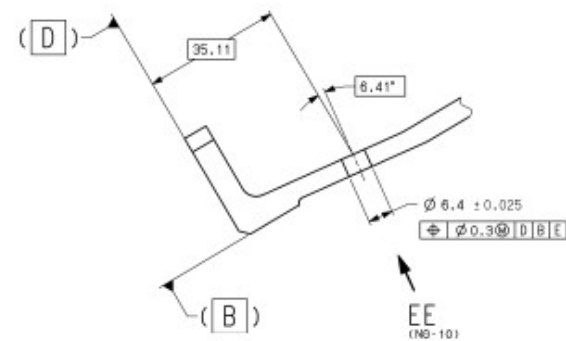

SECTION EB-EB (E4-5)
7 PLACES

TABLE 5


EA
(C4-5)
30.518°
90.518°
133.150°
180.518°
227.887°
270.518°
330.518°

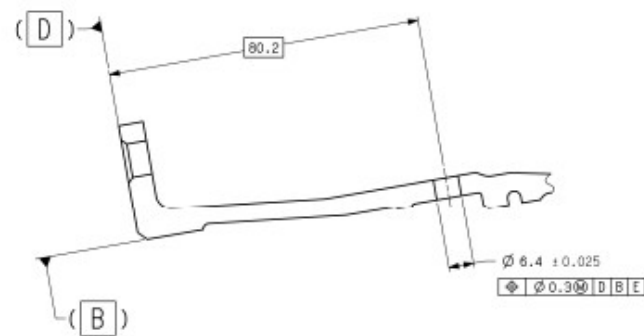


SECTION ED-ED (D5-5)
2 PLACES

TABLE 6

EC
(D6-5)
10°
200°



Ø 0.71 ± 0.13 THRU
[.343 ± .005]
Ø 0.25 [C A E]
CICR
77 HOLES

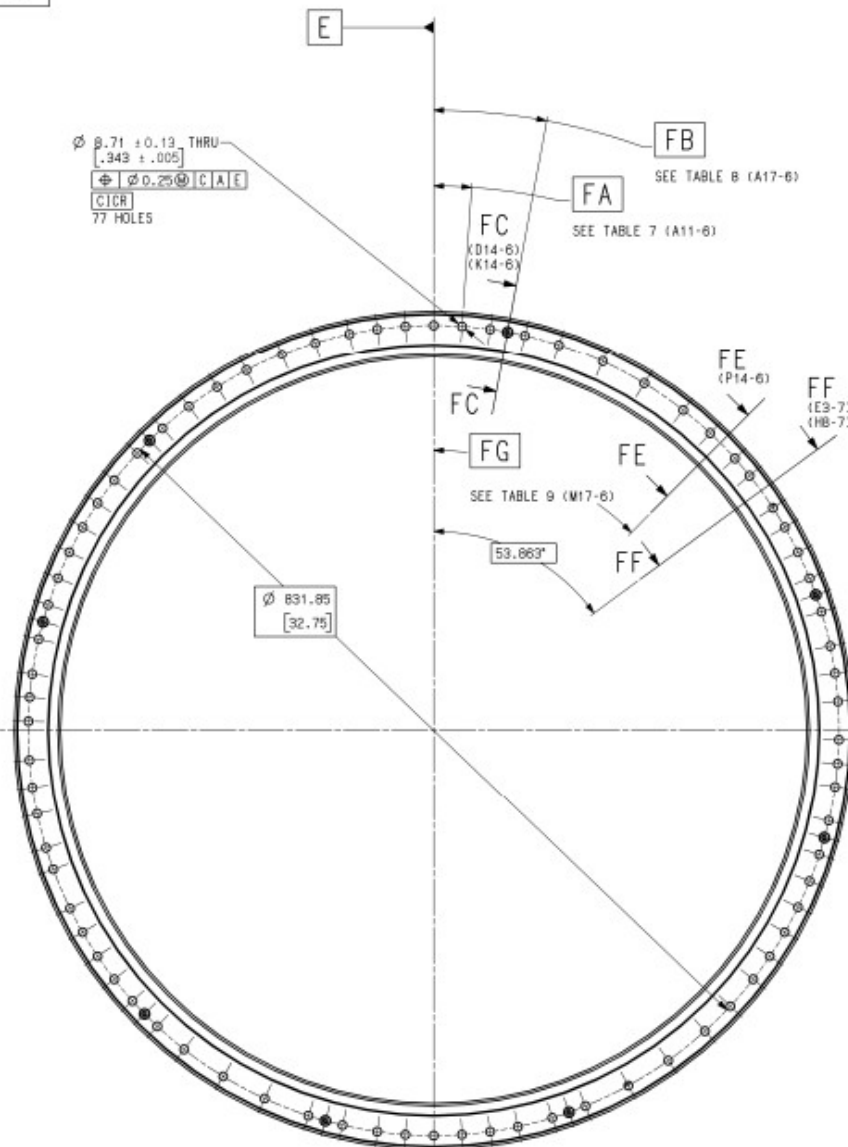

VIEW BE (F17-2)
SCALE 1:2

FB
SEE TABLE 8 (A17-6)

FA
SEE TABLE 7 (A11-6)

FC
(D14-6)
(K14-6)

FC

SEE TABLE 9 (M17-6)

FE
(P14-6)


FF
(E3-7)
(HB-7)

TABLE 7

FA	
(C7-6)	
4.00°	188.00°
8.00°	193.00°
12.00°	198.00°
16.00°	204.65°
24.65°	211.30°
31.30°	218.00°
38.00°	223.00°
43.00°	228.00°
48.00°	232.00°
51.20°	236.00°
56.80°	240.00°
60.00°	243.80°
64.00°	249.80°
68.00°	253.00°
73.00°	258.00°
76.00°	261.90°
81.90°	265.80°
85.90°	271.30°
91.30°	274.70°
94.70°	278.00°
98.00°	283.00°
103.00°	288.00°
108.00°	292.00°
112.00°	296.00°
116.00°	300.00°
120.00°	304.00°
124.00°	308.00°
128.00°	313.00°
133.00°	318.00°
138.00°	322.85°
144.65°	327.70°
151.30°	332.50°
158.00°	338.00°
163.00°	343.00°
168.00°	348.00°
172.00°	352.00°
176.00°	356.00°
180.00°	360.00°
184.00°	

TABLE 8


FB	
(B7-6)	
10.5°	
70.5°	
105.5°	
160.5°	
195.5°	
225.5°	
285.5°	
315.5°	




SECTION FC-FC (C6-6)
8 PLACES



DETAIL FD (A13-6)
SCALE 5:1

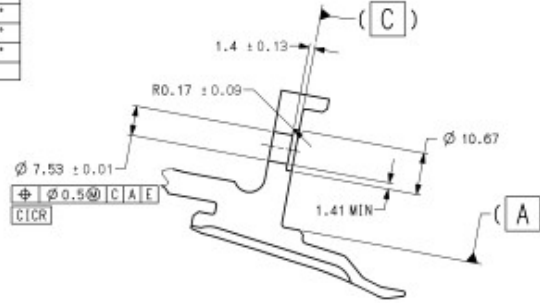






REPEAT SECTION FC-FC (C6-6)
OMIT ITEM ⑦
8 PLACES

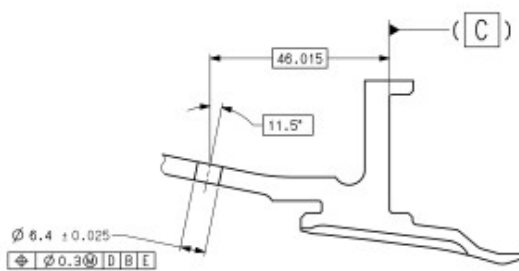





SECTION FE-FE (D8-6)
ROTATED 45DEG CCW
9 PLACES

TABLE 9






FG	
(E6-6)	
0.000°	
45.000°	
90.000°	
124.054°	
162.973°	
197.027°	
235.946°	
270.000°	
315.000°	

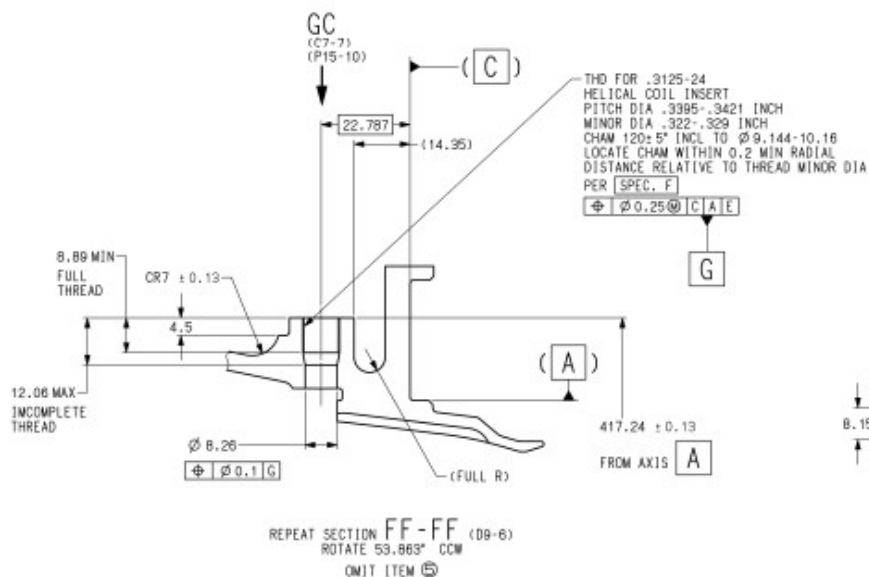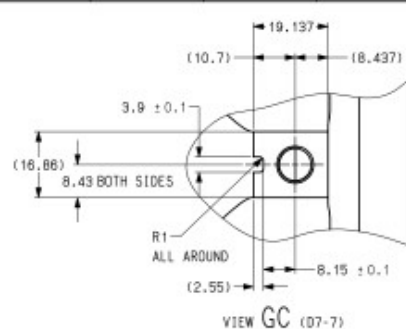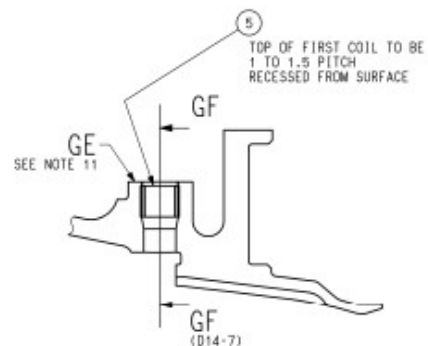




SECTION GF-GF (D2-7)

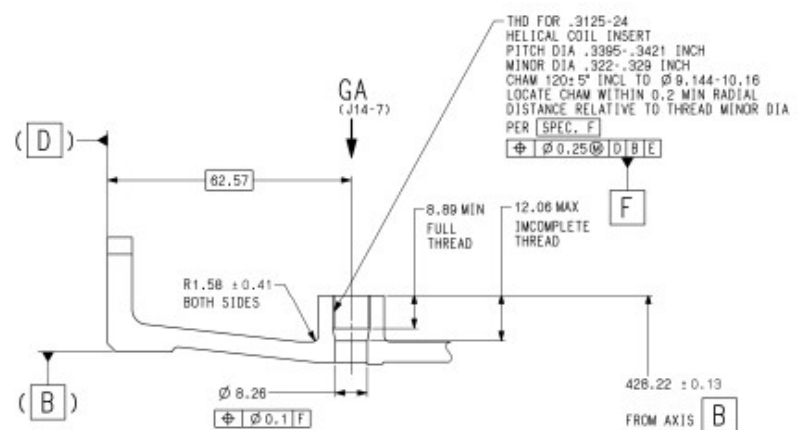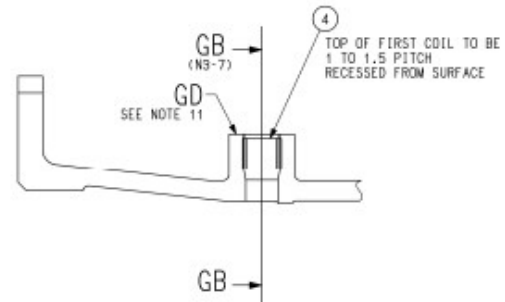
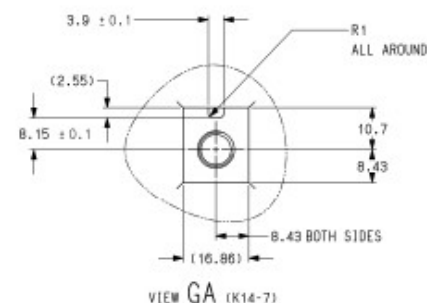




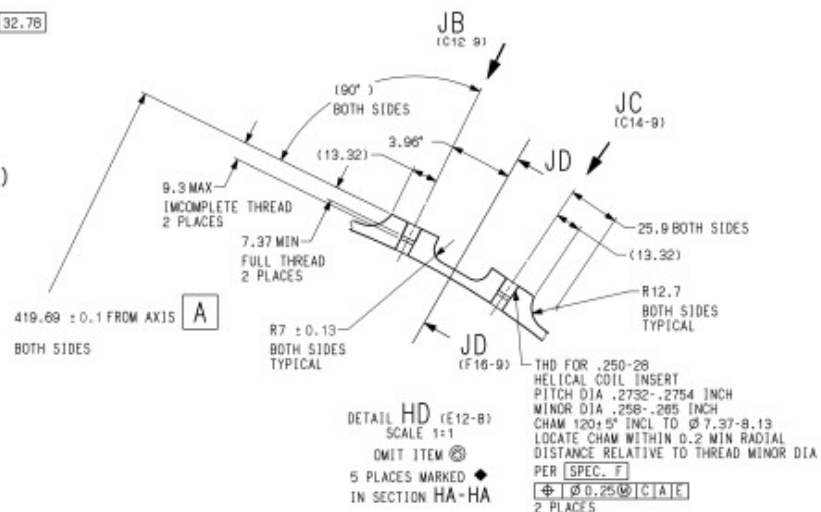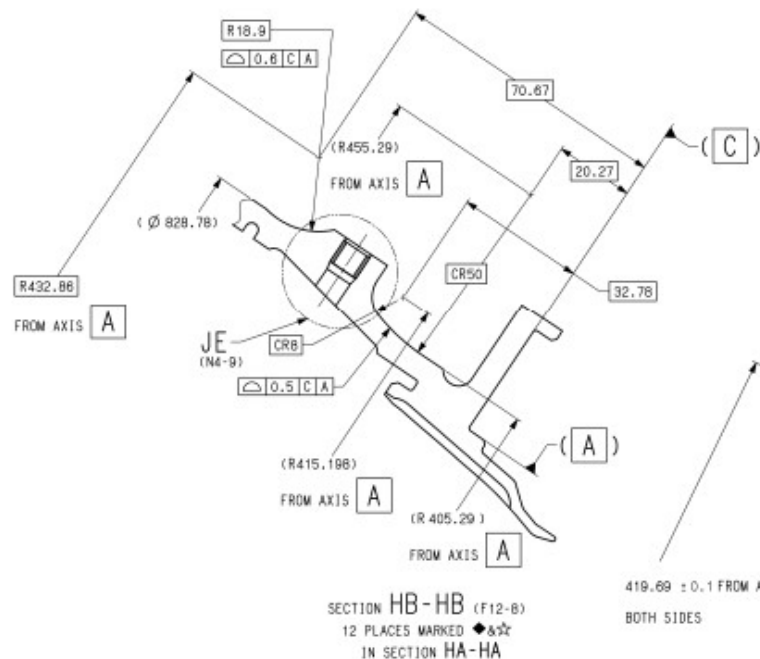

TOP OF FIRST COIL OF ITEM 5
 0.4 TO 0.7 PITCH
 BELOW THIS SURFACE

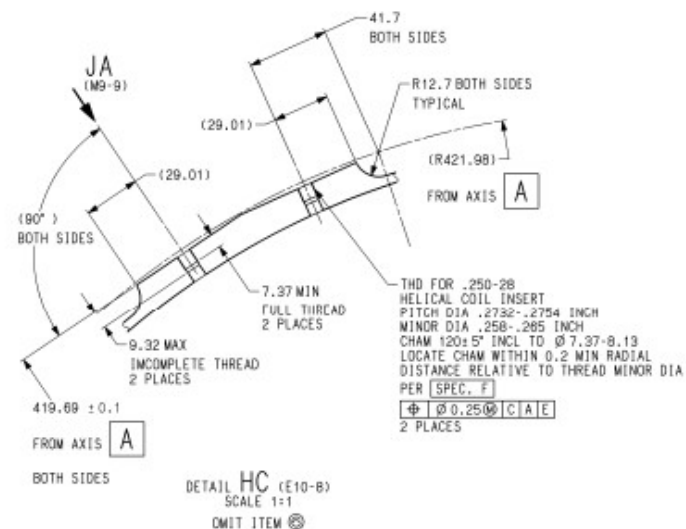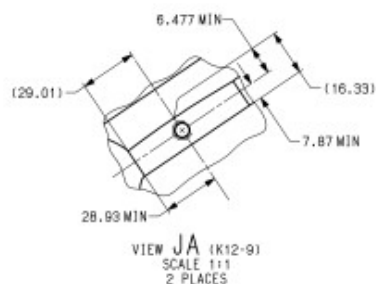
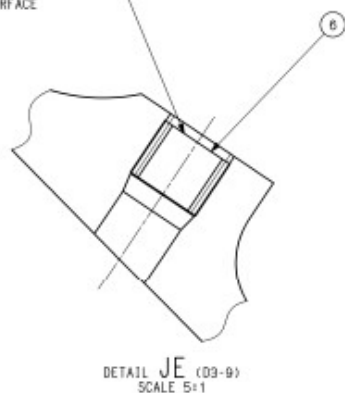


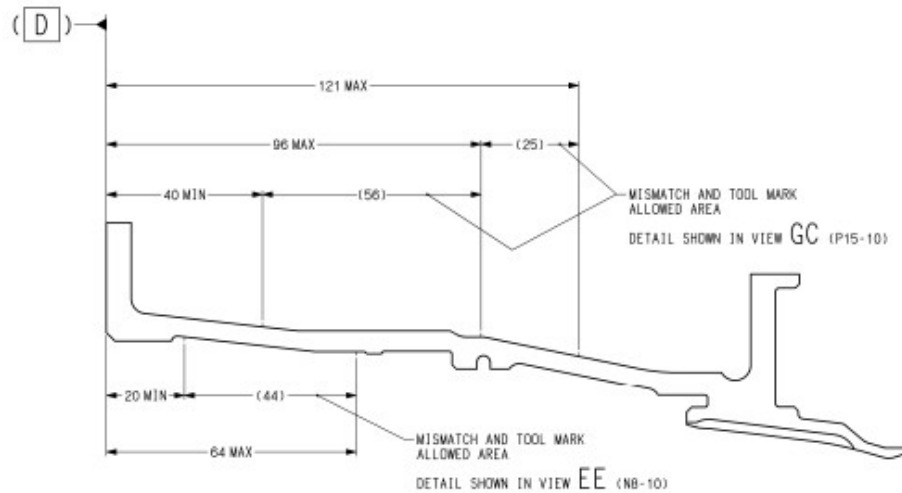

REPEAT TYPICAL SECTION



DETAIL KA (J8-10)(J12-10)
NOT SCALE
ALLOWABLE TOOL MARK DIMENSIONS

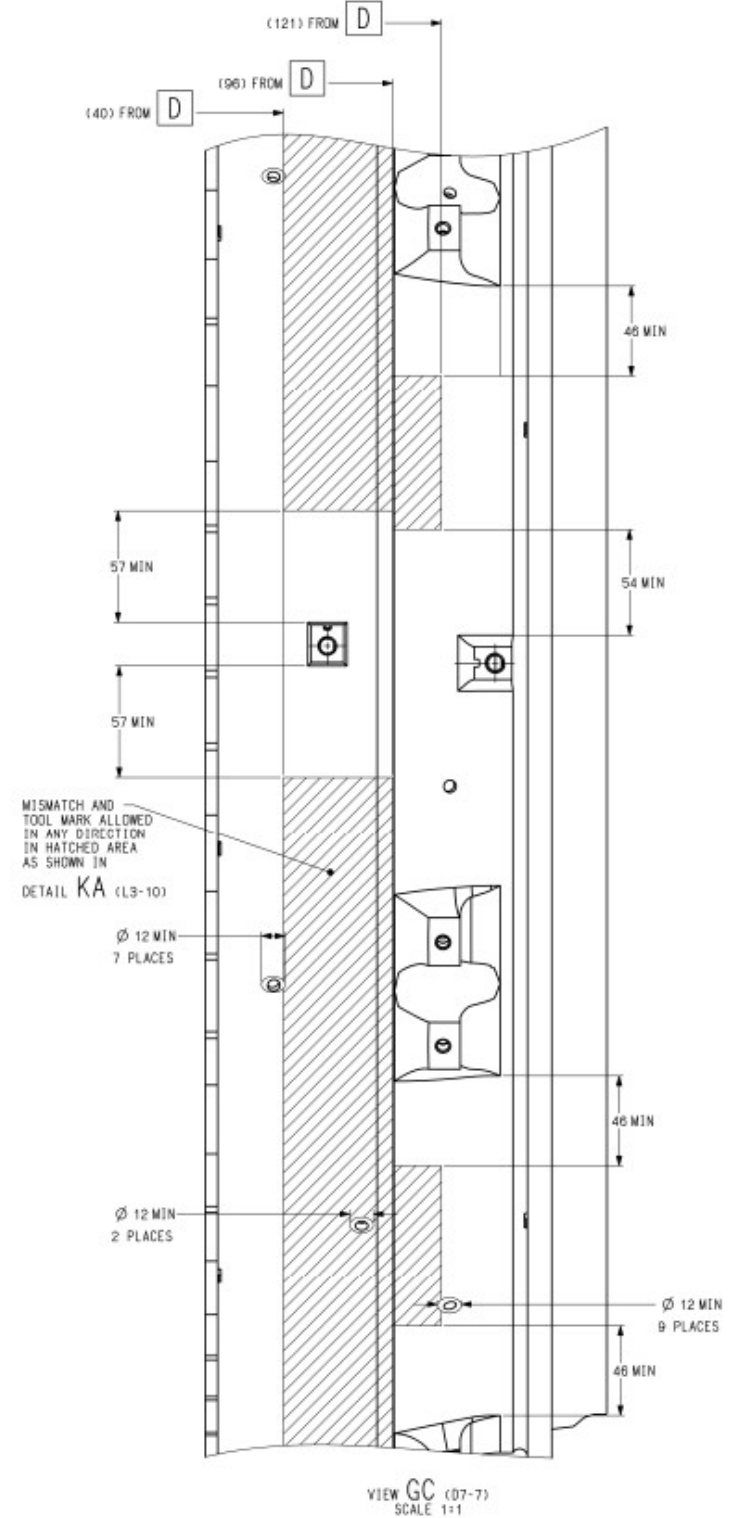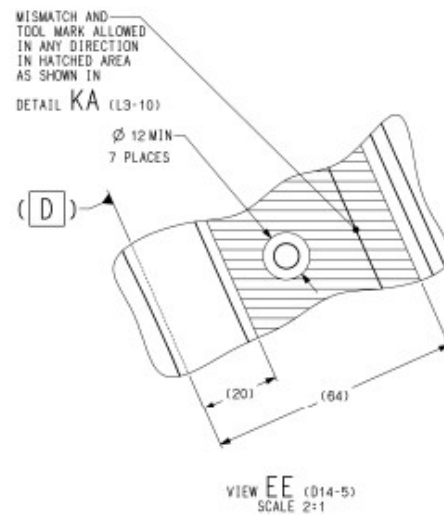




AREA LB
MARK HOLE NO.
SEE TABLE 10
(K9-11)
SHALL BE READABLE
AS SPECIFIED
IN VIEW LE (N7-11)
SEE NOTE 9

LE
(N7-11)


LA

SEE
TABLE 10
(K9-11)

(E)

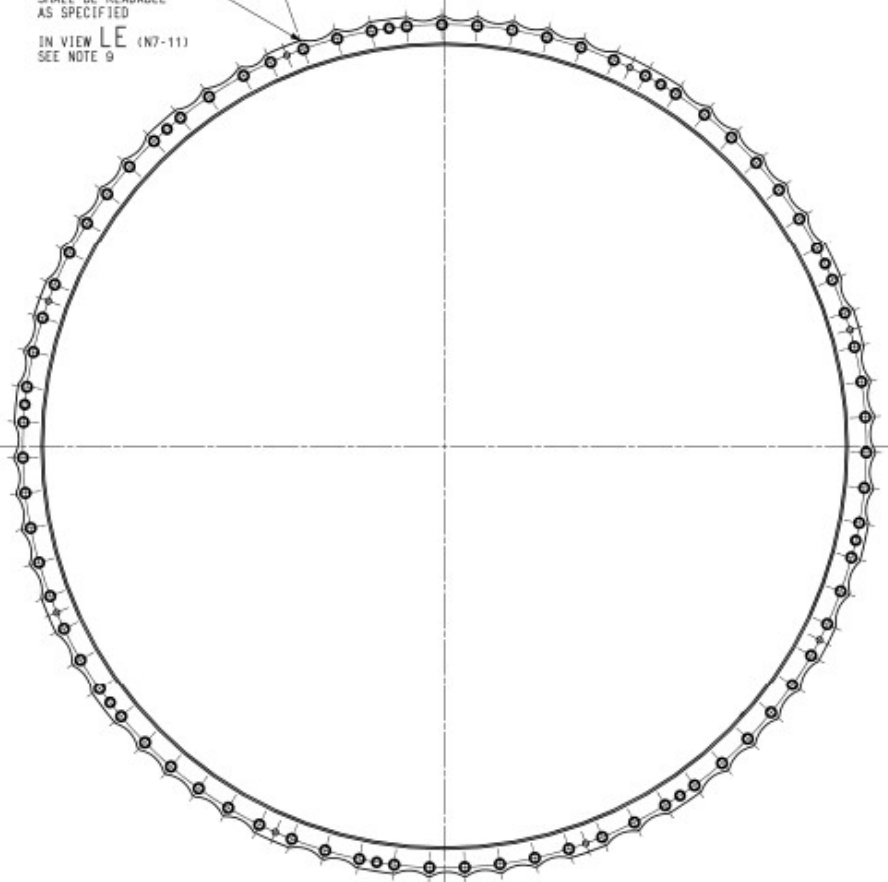

REPEAT VIEW BD (E4-2)
SCALE 1:2



VIEW LE (A3-11)
SCALE 5:1
MARKING DIRECTION EXAMPLE

TABLE 10

LA (A4-11)	
LOCATION	HOLE NO.
0.35"	01
19.55"	05
43.55"	10
67.55"	15
91.55"	20
115.55"	25
139.55"	30
163.55"	35
187.55"	40
211.55"	45
235.55"	50
259.55"	55
283.55"	60
307.55"	65
331.55"	70
355.55"	75


(E)

LF
(N11-11)


LC

SEE
TABLE 11
(K16-11)

AREA LD
MARK HOLE NO.
SEE TABLE 11
(K16-11)
SHALL BE READABLE
AS SPECIFIED
IN VIEW LF (N11-11)
SEE NOTE 9

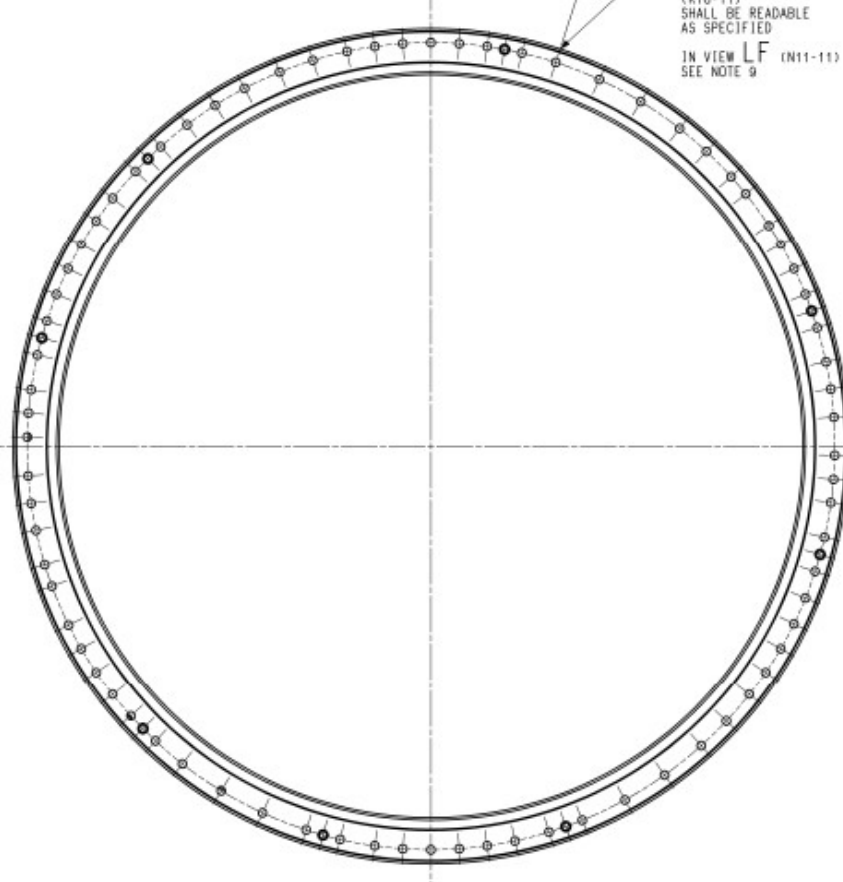

REPEAT VIEW BE (F17-2)
SCALE 1:2

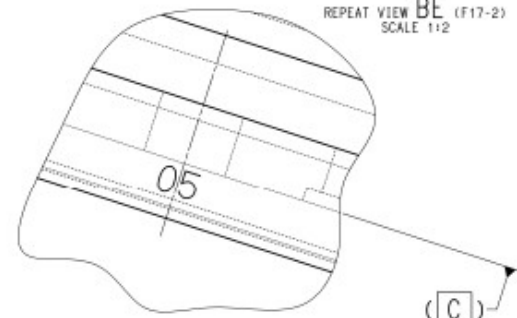

VIEW LF (A15-11)
SCALE 5:1
MARKING DIRECTION EXAMPLE

TABLE 11

LC (A14-11)	
LOCATION	HOLE NO.
0.00"	01
18.00"	05
48.00"	10
68.00"	15
94.79"	20
112.00"	25
133.00"	30
163.00"	35
184.00"	40
218.00"	45
236.00"	50
258.00"	55
278.00"	60
300.00"	65
318.00"	70
348.00"	75
356.00"	77