


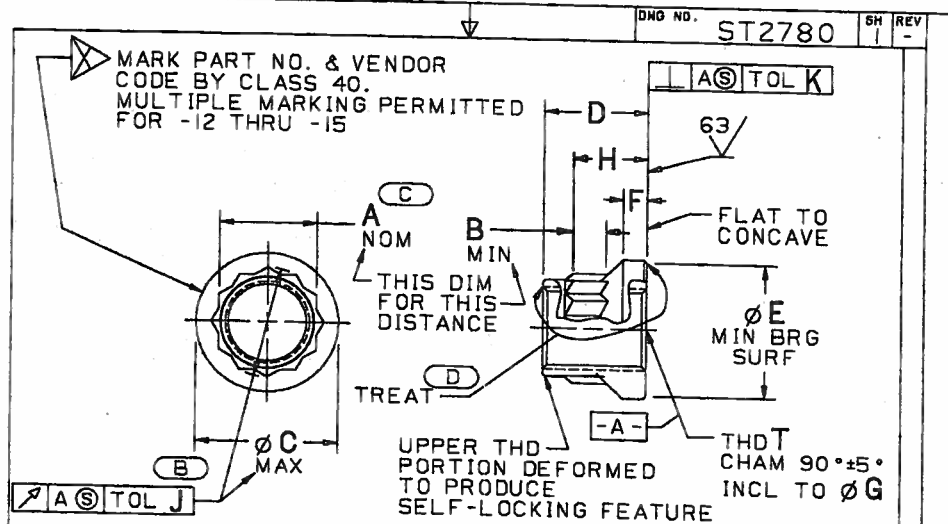

11. DWG INTERPRETATIONS PER SPEC PWA 360.
10. MARK IDENT PER SPEC PWA 310 CLASS 16.
9. PERFORMANCE OF SELF-LOCKING FEATURE PER SPEC PWA 384 EXCEPT TEST BOLT MATL SHALL BE PER SPEC PWA 96. BOLT MODULUS OF ELASTICITY OF 29,500,000 TO BE USED TO CALCULATE CORRECT ELONGATION OF BOLTS FOR SELF-LOCKING TORQUE TEST.

8. MATL: AMS 5732 OR AMS 5737 (SST) HDNS: 24 MIN HRC OR EQUIV.
7. (D) TREAT PER SPEC PWA 36545-3 WHERE SHOWN. OTHER SURF OPT & MAY BE INCOMPLETE. DIM ARE BEFORE TREATMENT.

6. THREADS PER SPEC PWA 355. 125
5. SURF TEXTURE PER SPEC PWA 388 UOS.
4. UOS ALL Ø (0.010) (A).
3. (B) DIM APPLY BEFORE DEFORMATION.
2. (C) WRENCHING CONFIGURATION PER AS 870.

1. APPROVED SOURCE OF SUPPLY:
VENDOR-KAYNAR MICRODOT
AEROSPACE FASTENING SYS.,
FULLERTON, CA
CAGE CODE-----15653
ITEM IDENT NO.-SEE TABLE
REF DWG NO.----H53777 REV 1
APPLICATION-----AIRFRAME ENGINE

SOURCE CONTROL DRAWING
ONLY THE ITEM DESCRIBED ON THIS DRAWING WHEN PROCURED FROM THE VENDOR(S) LISTED HEREON IS APPROVED BY PRATT & WHITNEY AIRCRAFT, EAST HARTFORD, CONN. FOR USE IN THE APPLICATION(S) SPECIFIED HEREON. A SUBSTITUTE ITEM SHALL NOT BE USED WITHOUT PRIOR APPROVAL BY PRATT & WHITNEY AIRCRAFT.

IDENTIFICATION OF THE APPROVED SOURCE(S) OF SUPPLY HEREON IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED ON THE DRAWING.

THIS DOCUMENT IS THE PROPERTY OF UNITED TECHNOLOGIES CORPORATION AND IS DELIVERED ON THE EXPRESS CONDITION THAT IT AND THE INFORMATION CONTAINED IN IT ARE NOT TO BE USED, DISCLOSED, OR REPRODUCED IN WHOLE OR IN PART, FOR ANY PURPOSE WITHOUT THE EXPRESS WRITTEN CONSENT OF UNITED TECHNOLOGIES CORPORATION; AND THAT NO RIGHT IS GRANTED TO DISCLOSE OR SO USE ANY INFORMATION CONTAINED IN SAID DOCUMENT. THESE RESTRICTIONS DO NOT LIMIT THE RIGHT TO USE INFORMATION OBTAINED FROM ANOTHER SOURCE

THIRD ANGLE PROJECTION	MRR 90-03-29	UNITED TECHNOLOGIES CORPORATION EAST HARTFORD, CONNECTICUT 06108 U.S.A.
DFTG	P.E.CLETTENBERG 90-04-02	
ENGR	ARM/LUL 90-04-24	NUT- SELF-LOCKING, DOUBLE HEX
HD	P. Quinn 90/4/4	
PREPARED UNDER CONTRACT	ST-90044	SIZE
FURNISHED UNDER CONTRACT	QAO ST2780	CAGE CODE
		DWG NO.
		BV 77445
		ST2780
		SCALE NONE
		SHEET 1 OF 2

ORIGINAL

DNO NO.

ST2780

SH
2REV
-

PART NO.	ITEM IDENT NO.	THD T	A NOM	B MIN	Ø C MAX
ST2780-09	H53777-3	.1900-32 UNJF-3B	.2500	.070	.355
ST2780-10	H53777-4	.2500-28 UNJF-3B	.3125	.095	.450
ST2780-11	H53777-5	.3125-24 UNJF-3B	.3750	.108	.535
ST2780-12	H53777-6	.3750-24 UNJF-3B	.4375	.147	.608
ST2780-13	H53777-7	.4375-20 UNJF-3B	.5625	.150	.692
ST2780-14	H53777-8	.5000-20 UNJF-3B	.6250	.176	.786
ST2780-15	H53777-9	.5625- 8 UNJF-3B	.6875	.205	.880

PART NO.	D	Ø E MIN	F	Ø G	H
ST2780-09	.230-.250	.325	.045-.060	.190-.220	.150-.190
ST2780-10	.308-.328	.410	.045-.060	.250-.280	.190-.235
ST2780-11	.340-.360	.495	.060-.075	.312-.342	.220-.270
ST2780-12	.438-.458	.559	.070-.090	.375-.405	.270-.330
ST2780-13	.449-.469	.652	.080-.100	.438-.468	.270-.330
ST2780-14	.548-.568	.746	.100-.120	.500-.535	.335-.405
ST2780-15	.613-.633	.840	.110-.130	.562-.597	.380-.460

PART NO.	J	K
ST2780-09	.006	.004
ST2780-10	.007	.005
ST2780-11	.008	.005
ST2780-12	.009	.005
ST2780-13	.010	.006
ST2780-14	.012	.006
ST2780-15	.014	.007

THIS DOCUMENT IS THE PROPERTY OF UNITED TECHNOLOGIES CORPORATION AND IS DELIVERED ON THE EXPRESS CONDITION THAT IT AND THE INFORMATION CONTAINED IN IT ARE NOT TO BE USED, DISCLOSED, OR REPRODUCED IN WHOLE OR IN PART, FOR ANY PURPOSE WITHOUT THE EXPRESS WRITTEN CONSENT OF UNITED TECHNOLOGIES CORPORATION; AND THAT NO RIGHT IS GRANTED TO DISCLOSE OR SO USE ANY INFORMATION CONTAINED IN SAID DOCUMENT. THESE RESTRICTIONS DO NOT LIMIT THE RIGHT TO USE INFORMATION OBTAINED FROM ANOTHER SOURCE

THIRD ANGLE PROJECTION 	MRR 90-03-29		EAST HARTFORD, CONNECTICUT 06108 U.S.A.
	P.E.CLETTENBERG 90-04-02		
ENDR RD	ARM/AL 90-04-24 R. Quinones 90/4/4	NUT- SELF-LOCKING, DOUBLE HEX	
PREPARED UNDER CONTRACT NONE	2042411	SIZE BV 77445	DWG NO. ST2780
FURNISHED UNDER CONTRACT	QRD ST2780	SCALE NONE	SHEET 2 OF 2

P&W FORM 3438V REV 1-88

ORIGINAL

REVISED

10-20-38