

(Specification parameters

technical feature


- Support humanoid detection, mobile detection and alarm;
- Support for two-way voice intercom;
- Support for P2P cloud monitoring;
- 4 times optical doubling, clear focus;
- Support IP66 waterproof function, wider application scenarios;
- Strong compatibility, support for standard ONVIF; support for Hikon pro Access to the third-party NVR;
- Support for RTSP real-time flow protocol;
- Support optional TF card slot, the maximum support of 256G;

product appearance



Applicable scenarios: warehouse, office, store, supermarket, villa, park, etc

Wall mounted bracket size

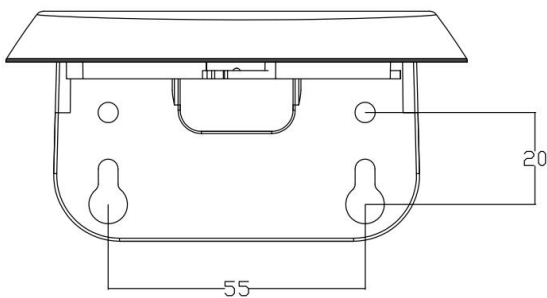

product model	HC116-PA
underlying parameter	
Main control chip	Embedded RTOS design, dual-core 32-bit DSP (GK7205V300), pure hard compression, watchdog
sensor	6 million 1 / 2.8 " Black light CMOS sensor; color 0.0001 Lux @ F 1.2, black and white 0.0001 Lux @ F 1.2
Plan composition	Guoke Micro GK7205V 300 + Sony IMX335
denoise	Support 2D and 3D noise reduction
electric fan	The built-in fan dissipate heat, and the fan is on synchronously when the light is on
Image Settings	Brightness, contrast, saturation, sharpness, backlight compensation, fluorescent lamp anti-flash, electronic de-fog, wide dynamic, image flip
shutter	1 / 50 (1 / 60) second to 1 / 10000 seconds
General function	Horizontal rotation, vertical rotation, doubling, focus.
lightning protection	Power supply, network comprehensive lightning protection, in line with the national standard GB / T17626.5, international standard IEC61000-4-5;
Business function	Support OSD, support real-time video transmission, support humanoid detection, support the customization of other intelligent functions, support cloud services
camera lens	
focal distance	From 3.41 to 10.33 the distance is infinity
angle of field	Wide: diagonal FV: 133°; horizontal V: 108.6°; vertical FV: 56.2° ele: diagonal: 36.7°; horizontal: 32°; vertical: 18°
Aperture value	F1.66 (Wide) ~ F3.03 (Tel) ± 5% distance is infinity
Cloud platform control	
Control Angle	Horizontal: 0-340 Vertical: 0-90
control rate	Horizontal: 22° / s Vertical: 15° / s
video frequency	
video processing	H.265+/H.265/H.264 Video coding, support code stream 0.1 M ~ 8 M pbs adjustable; support frame rate 1~30 frames / s adjustable;
frame rate	G.711 Encoding standard, support two-way voice intercom, support audio and video synchronization;
image output	Main code stream: PAL: 3072 * 2048 @ 20 fps; 2592 * 1944 @ 25 fps, 2560 * 1440 @ 25 fps, 1920 * 1080 @ 25 fps NTSC:3072*2048@20fps ; 2592*1944@25fps,2560*1440@30fps,1920*1080@30fps Subcode stream: PAL: D 1 @ 25 fps, HD 1 @ 25 fps, CIF @ 25 fps, QVGA @ 25 fps NTSC:D1@30fps ,HD1@30fps ,CIF@30fps ,QVGA@30fps
audio frequency	
Audio processing	G.711A code standard, support two-way voice intercom function, support audio and video synchronization
intelligence	
common event	Humanoid detection, area invasion
The alarm linkage	SD card video recording, APP alarm push
network	
networking protocol	Support for RTSP / FTP / DHCP / NTP / UPnP / onvif / Hikvision private network protocol
A P P	

Mobile phone monitoring	Support mobile phone monitoring (iOS, Android); domestic monitoring eye Pro, overseas XMEYE Pro
-------------------------	---

joggle	
networking protocol	1 RJ 45 Ethernet interface, 10 / 100M adaptive, 8KV antistatic capability
local-storage	Optional TF card up to 256G
Audio processing	G.711 Encoding standard, support two-way voice intercom function, support audio and video synchronization
Audio input	A built-in microphone- -38DB 3DB±
Audio input	A built-in speaker is 8 O O 2W
fill-in light	
Infrared irradiation distance	Up to up to 15m
infrared lamp	8 dot array infrared, group bright, soft photosensitive control light
Cloud platform function	
Number of prepositions	220
AB 2-point Scan / Cruise	nonsupport
General specification	
power supply mode	DC: 12V ± 25% supports backcontact protection
POE supply electricity	Support optional POE power supply
Power interface type	Φ 5.5mm circle mouth
Power consumption of equipment	DC: 12V, power consumption: about 3-15 W
working temperature	Turn on the fill light-30°C ~45°C, turn off the fill light: -30°C ~50°C
factory data reset	support
material quality	Combination of metal structural parts + plastic structural parts
size	Product size: 129 * 129 * 124 Packaging dimensions: 140 * 155 * 150 (hoisting single package) 140 * 155 * 160 (wall-mounted single package) Large outer box of 20
weight	Equipment weight (net weight): about 640g Packaging weight (gross weight): about 885g (lifting support + power supply), about 810g (lifting support without power supply)

Appearance size diagram

	About 935g (wall support + power supply), about 855kg (wall support without power supply)
attestation	
protect	IP66, heavy rain protection.
fittings of a machine	
Packaging accessories	Waterproof cap x1, manual x1, certificate x1, warranty card x1 (excluding abroad), screw package x1, Support bracket x1, power supply x1

