


8MP HD Outdoor Pan & Tilt POE Camera

YHD98-P

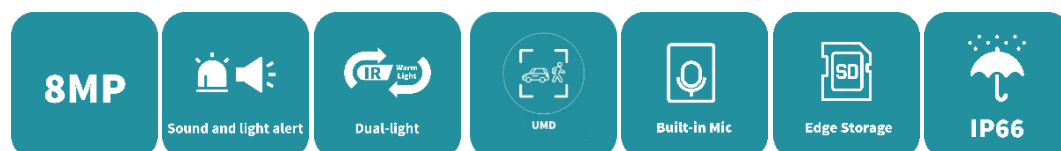

Features

High quality image with 8MP, 1/2.7" CMOS sensor

3840*2160@20fps in the main stream

Ultra 265, H.265, H.264

Support digital WDR (Wide Dynamic Range)

Built-in Mic & Speaker, support two-way audio, offer better interaction

Support sound and light warning, makes warning and alarming more noticeable

Smart IR, up to 30 m (98 ft) IR and 30 m (32 ft) warm light distance, suitable for more scenes

Self-contained bracket, support two kinds of mounting

Supports 512 GB Micro SD card

IP66 ingress protection

Support PoE power supply

Specifications

Model	YHD98-P
Camera	
Max Resolution	8 MP
Sensor	1/2.7" CMOS
Min. Illumination	Colour: 0.005Lux (F1.6, AGC ON) 0 Lux with IR on
Day/Night	IR-cut filter with auto switch (ICR)
Shutter	Auto/Manual, 1 ~ 1/100000s
S/N	>52 dB
WDR	DWDR
Lens	
Digital Zoom	N/A
Focal Length	4.0 mm
Iris Type	Fixed
Iris	F1.6
Field of View (H)	90.5°
Field of View (V)	44.4°
Lens Type	Fixed
DORI	
DORI Distance (Lens)	4.0mm
DORI Distance (Detect)	120.0 (393.7ft)
DORI Distance (Observe)	48.0 (157.5ft)
DORI Distance (Recognize)	24.0 (78.7ft)
DORI Distance (Identify)	12.0 (39.4ft)
Illuminator	
Illumination Distance (IR)	30 m (98.4 ft)
Illumination Distance (Warm Light)	30 m (98.4 ft)
Wavelength	850 nm
IR On/Off Control	Auto/Manual

Video

Video Compression	Ultra 265, H.265, H.264
Frame Rate	Main Stream: 8MP (3840*2160), Max 20fps; 5MP (2880*1620), Max 25fps; 4MP (2560*1440), Max 25fps; 3MP (2304*1296), Max 30fps; 2MP (1920*1080), Max 30fps; 720P (1280*720), Max 30fps; Sub Stream: 640*360, Max 30fps; 2CIF (704*288), Max 30fps; CIF (352*288), Max 30fps;
Video Bit Rate	128 Kbps to 16384 Kbps
U-code	Support
OSD	Up to 4 OSDs
Privacy Mask	Support (only NVR)
ROI	Support
Video Stream	Dual Streams

Image

White Balance	Auto, Outdoor, Fine Tune, Sodium Lamp, Locked, Auto2
Digital Noise Reduction	2D/3D DNR
Smart IR	Support
Flip	Normal, Flip Vertical, Flip Horizontal, 180°
Dewarping	N/A
HLC	N/A
BLC	Support
Defog	Digital Defog

Events

Basic Detection	Ultra motion detection (based on human body and vehicle detection), High-Decibel detection
General Function	IP Address Filtering, Access Policy, ARP Protection, RTSP Authentication, User Authentication, HTTP Authentication

Intelligent

Auto Tracking	Support
---------------	---------

Audio

Audio Compression	G.711U, G.711A
Audio Bitrate	64 Kbps
Two-way Audio	Support

Suppression	Support
Sampling Rate	8 kHz
Storage	
Edge Storage	Micro SD, up to 512 GB
Network Storage	ANR
Network	
Protocols	IPv4, TCP, UDP, DHCP, RTSP, DNS, DDNS, NTP, HTTP
Compatible Integration	API
Client	Uniarch Client, Uniarch app
Web Browser	Plug-in required live view: IE 10+, Chrome 45+, Firefox 52+, Edge 79+
PTZ	
Pan Range	0° ~ 345°
Pan Speed	1°/s ~ 40°/s Preset speed: 40°/s
Tilt Range	0° ~ 90°
Tilt Speed	1°/s ~ 30°/s Preset speed: 30°/s
Number of Presets	20
Home Position	Support
Interface	
Audio I/O	N/A
Alarm I/O	N/A
Built-in Mic	Support
Built-in Speaker	Support
WIFI	N/A
Network	1 × RJ45 10 M/100 M Base-TX Ethernet
General	
Protection	IP66
Power	DC 12V±25%, PoE (IEEE 802.3af)
Power consumption	Max 8W
Power Interface	Ø5.5 mm coaxial power plug

Dimensions	Φ151mm*110mm*141mm (Φ6.0"x 4.3"x 5.6")
Weight	0.39kg (0.86lb)
Material	Plastic
Working Environment	-30 °C to 60 °C (-22 °F to 140 °F), Humidity: ≤ 95% RH (non-condensing)
Storage Environment	-30 °C to 60 °C (-22 °F to 140 °F), Humidity: ≤ 95% RH (non-condensing)
Surge Protection	4 KV
Reset Button	Support
LED Indicator	1, red/blue

Dimensions

