
Robot sensor fusion

Conceptual loosely coupled state estimation with heterogeneous measurements

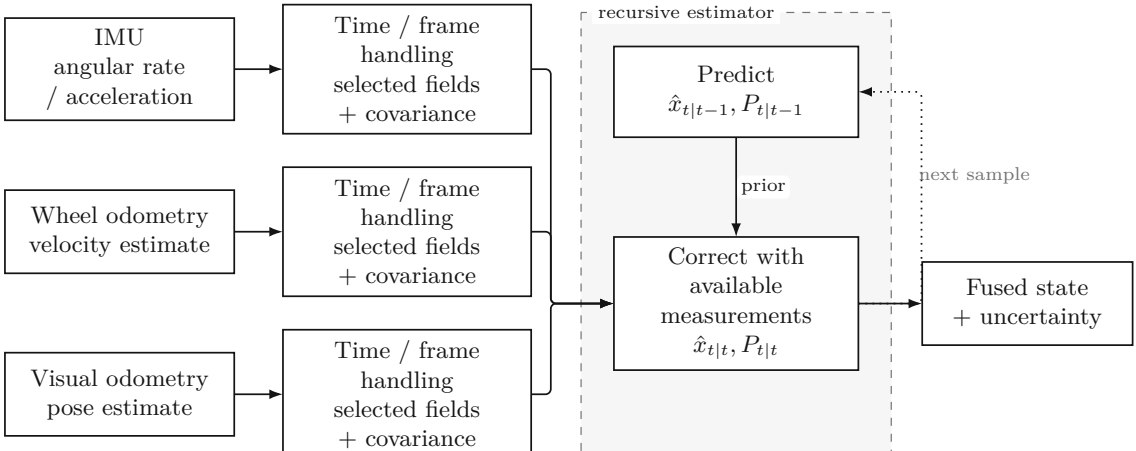

P: state covariance. Measurements can arrive at different times; fusion choices depend on observability and noise modeling.

Conceptual predict–correct fusion informed by robot_localization documentation; frame and covariance treatment are essential.