

CO2 LASER MARKING MACHINE



carbonized
stripped coatings



PET blistering



PRODUCT DESCRIPTION

High-quality encoding on different materials

CO2 lasers are gas lasers that use carbon dioxide gas as a medium for product marking. Scribing speeds of up to 9 meters per second (9m/s) exceed comparative CO2 laser marking technologies that require additional processes to deliver consistently high-quality coding on a wide range of materials including cardboard, glass, metal coatings, paper labels, PET and other plastic materials.

The CO2 laser marker range offers a wide range of wavelength options to help find the ideal solution to meet the needs of the exact application.

9.3 micron, particularly suitable for marking on PET plastic, typically beverage products.

10.2 micron: Suitable for laminating cartons commonly used in many cosmetic and pharmaceutical applications.

10.6 micron: Suitable for most standard consumer packaged goods applications such as paper, plastic, wood products and glass.



www.iegco.com



info@iegco.com



01277778864
01220997663



Industrial Zone, Block (27),
15th of May City
Cairo - Egypt


PRODUCT ADVANTAGE

- ✓ The air-cooled laser source is virtually maintenance-free, dramatically reducing downtime.
- ✓ Longer life of the laser source, with 40,000 hours of Mean Time Between Failure (MTBF).
- ✓ Standard 100*100 marking area, as well as high marking accuracy and edge sharpness for higher throughput.
- ✓ Standard IP54 protection class, able to sustain stable operation in dusty and humid harsh environments.
- ✓ A variety of working distance options, 0-360° printed mounting direction, production line integration more flexible.



PRODUCT MIX



PRODUCT SIZE

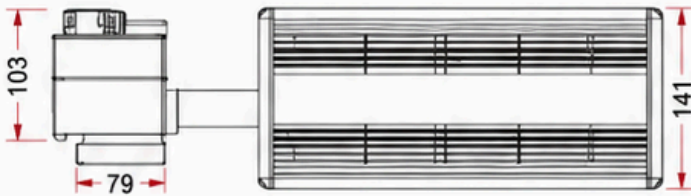

lasers

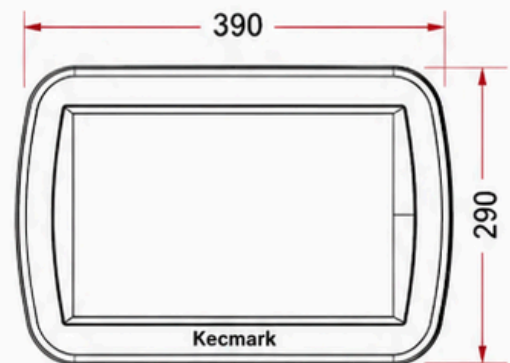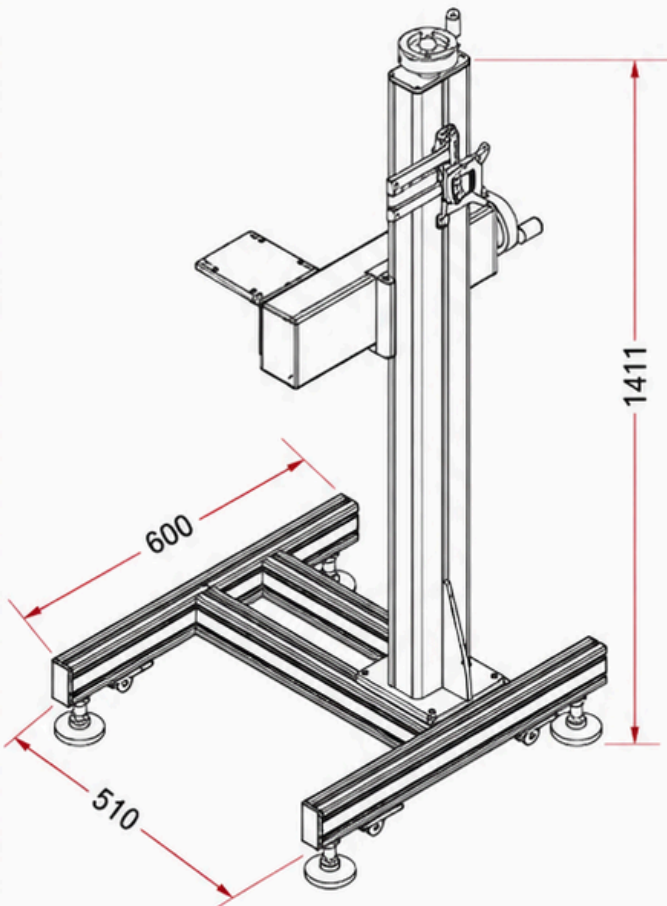

bracket

touch panel



www.iegco.com



info@iegco.com



Industrial Zone, Block (27),
15th of May City Cairo - Egypt

PRODUCT PARAMETERS

	Lasers	Sealed CO2 RF Laser
	Power	30W
	Laser wavelength	9.3μm/10.2μm/10.6μm
	Repetition rate	0~250kHz
	Radiation field	4x (standard size)
	Laser class	Class 4 laser products – IEC60825-1 compliant
	Marking direction	0~360°
	Marking area	Standard 110*110mm (can be customized)
	Scribing speed	Up to 20m/s
	Working distance	365mm
	Spot size	1.8mm (±0.2mm)
	Marking content	1D, 2D barcode, logos, Chinese, English and numbers
	User interface	10" full color touch screen
	Communication interface	RJ45, RS232, RS485, USB, SD card
	Rated voltage	200~240V 50/60Hz
	Power of the whole machine	≤300W
	Weight	16.5kg
	Cooling method	Air cooling
	Protection class	IP54 (customizable)
	Environmental temperature	5~40°C
	Humidity range	Relative humidity <90%, non condensing

STANDARD ACCESSORIES

- ✓ Touch panel
- ✓ Power cable
- ✓ Photoelectric sensors
- ✓ Lifting bracket
- ✓ Signal cable
- ✓ Encoders



www.iegco.com



info@iegco.com



Industrial Zone, Block (27),
15th of May City Cairo - Egypt

APPLICATION SCENARIO



Conveyor



Slitter



Labeling machine

MARKING EFFECT



01277778864



01220997663



info@iegco.com



www.iegco.com



Industrial Zone, Block (27),
15th of May City
Cairo - Egypt



SCAN ME