

UV LASER MARKING MACHINE-UV900 SERIES



COMPACT

Ultra-compact structure
saves space and fits
easily into production lines



EASY TO INTEGRATE

Designed for easy integration
into all kinds of packaging
machinery and systems



IP65

Sealed design with IP65
protection for reliable
performance in harsh
environments



PRODUCT DESCRIPTION

Designed for integration in tight spaces

New UV laser marking machine, designed for packaging industry. Ultra-compact structure reduces the volume by 30%, 70mm short focal length optical system, fits the internal structure of all kinds of packaging machinery, can be easily embedded into the packaging machine, assembly line or narrow workspace, dramatically improving the integration of production lines.

High-performance UV laser can realize high-precision marking on plastic film and composite materials without thermal damage, eliminating ink pollution and consumable costs, perfect alternative to traditional solutions. Modular design, supports flexible multiple integrated



HIGH PRECISION MARKING
Clear and permanent marking
on various materials



HIGH RELIABILITY
Stable performance with
low maintenance



ECO-FRIENDLY
No consumables, no ink,
no pollution



COST-EFFECTIVE
Lower operating cost and
higher production efficiency



FLEXIBLE INSTALLATION
Supports multi-angle
installation for different
production lines



PLUG AND PLAY
Intelligent control system
for easy operation

PRODUCT ADVANTAGE



Compact size for easy installation

The small and compact body design allows for easy replacement of existing printers such as inkjet printers and TTO thermal transfer printers. The specially equipped exclusive bracket makes it easier to install the marking machine, ensuring easy installation even in limited space.



Zero consumable costs

UV laser marking machine adopts photolithography technology for coding without consumables. Compared with traditional coding equipment, it not only eliminates the need for ribbon and print head replacement for TTO thermal transfer printers, but also eliminates the need for regular replacement of ink, solvents and films as in the case of inkjet printers. It truly realizes zero consumable cost, and at the same time eliminates the trouble of regular maintenance and inspection.



Easy operation

TTO heat transfer printing is a relatively complex operation that requires a certain level of skill and experience from professionals, and novices may find it difficult to get up to speed quickly. This complexity may lead to an increase in training costs. The laser marking machine, however, is equipped with an intelligent control system with plug-and-play functionality, which greatly reduces the threshold of operation and ensures that it can be used efficiently by zero basic users.



Marking content is long-lasting and does not fade

Traditional inkjet coding and TTO thermal transfer printing have the risk of disappearing or missing content - the pre-process may be contaminated by oil and dust, and the post-process needs to face the challenges of alcohol wiping, high-temperature sterilization, and handling friction. Our laser marking technology can effectively withstand these tests and ensure that the marking is long-lasting and clear.



Oil pollution



Dust



Alcohol



High temperature


Thermal transfer printer

2022X 02 09
T-A-0004 G


UV laser marking

生产批号: 20221114XY
生产日期: 20221115
有效期限: 20241113


PRODUCT SIZE

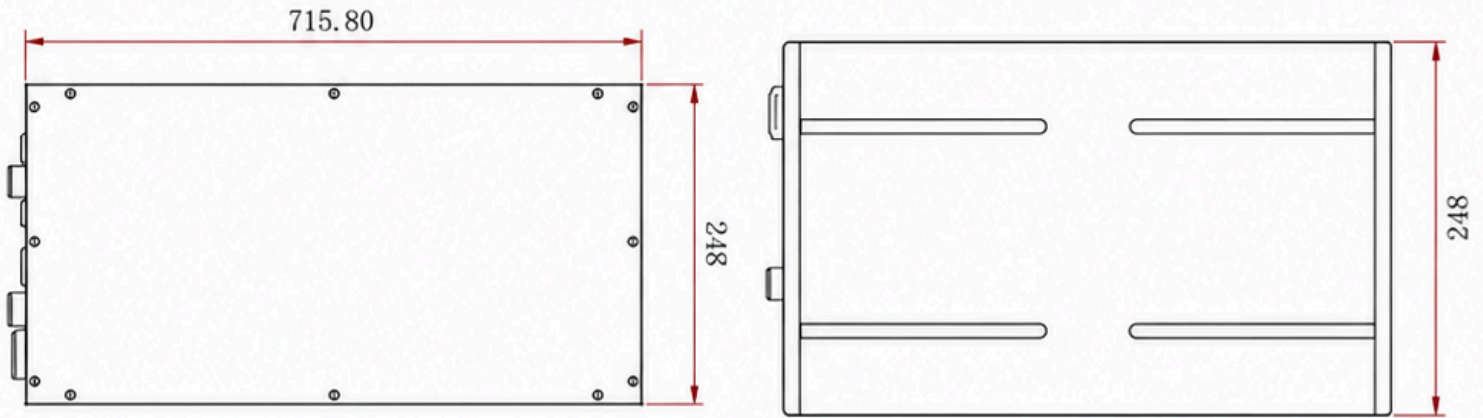

LASERS

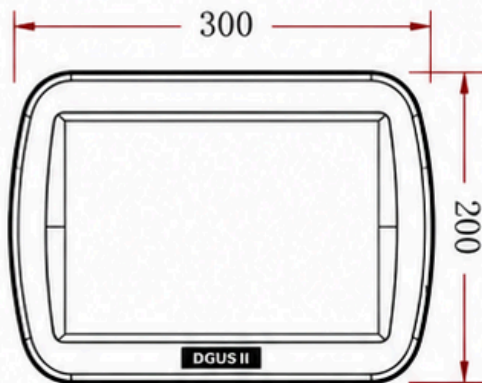

TOUCH PANEL

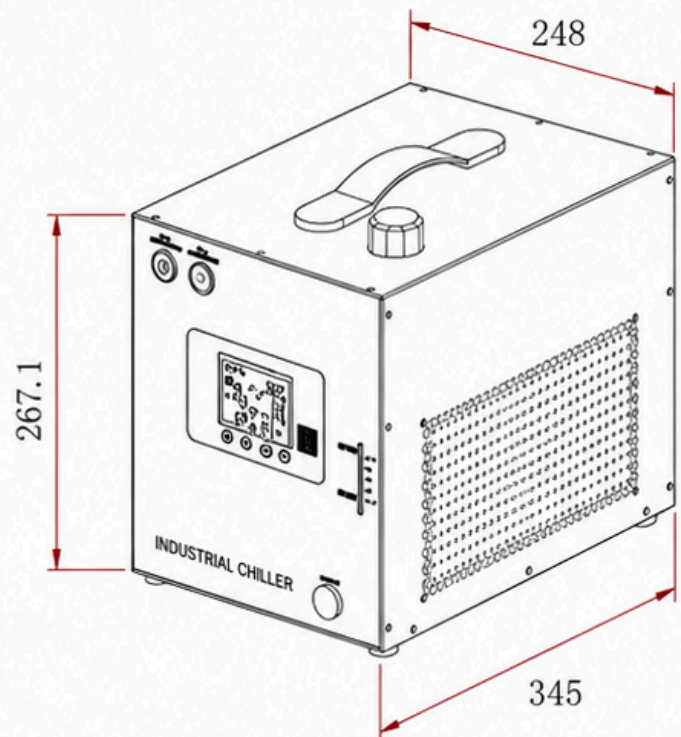


INDUSTRIAL CHILLER

PRODUCT PARAMETERS


	Lasers	UV nanosecond solid-state lasers
	Power	5W
	Laser wavelength	355nm
	Repetition rate	10-200KHz
	Radiation field	6x
	Laser class	Class 4 laser product – IEC60825-1 compliant
	Marking direction	0-360°
	Marking area	110*110mm
	Scribing speed	Up to 20m/s
	Working distance	70mm
	Spot size	0.8mm (±0.2mm)
	Marking content	1D, 2D barcodes, icons, Chinese, English and numbers
	User interface	10" full color touch screen
	Communication interface	RJ45, RS232, RS485, USB, SD card
	Rated voltage	200~240V 50/60Hz
	Power of the whole machine	≤1KW(including water tank)
	Weight	Laser 8kg, Industrial chiller 13kg
	Cooling method	Water cooling
	Protection class	IP65
	Environmental temperature	0~35°C
	Humidity range	Relative humidity <90%, non-condensing

STANDARD ACCESSORIES

- Industrial chiller
- Touch panel
- Bracket
- Power cable
- Signal cable
- Photoelectric sensors
- Encoders



APPLICATION SCENARIO

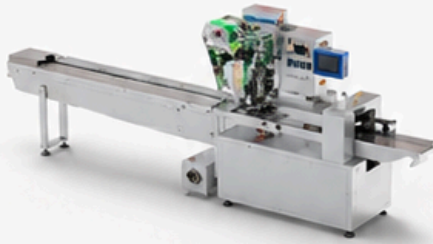

Pillow machines



Vertical machines

MARKING EFFECT

