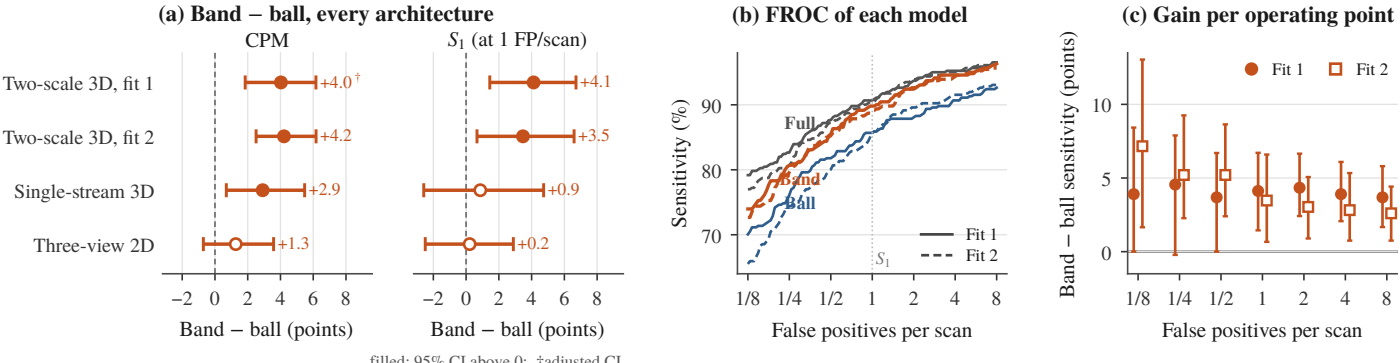
(a) Band − ball, every architecture
CPM
S_1 (at 1 FP/scan)
Two-scale 3D, fit 1
Two-scale 3D, fit 2
Single-stream 3D
Three-view 2D
+4.0†
+4.2
+2.9
+1.3
+4.1
+3.5
+0.9
+0.2
−2 0 2 4 6 8
Band − ball (points)
filled: 95% CI above 0; †adjusted CI
(b) FROC of each model
Sensitivity (%)
90
80
70
Full
Band
Ball
S_1
Fit 1
Fit 2
1/8 1/4 1/2 1 2 4 8
False positives per scan
(c) Gain per operating point
Band − ball sensitivity (points)
10
5
0
Fit 1
Fit 2
1/8 1/4 1/2 1 2 4 8
False positives per scan