



e-con Systems India Pvt Ltd

Web: www.e-consystems.com

Email: camerasolutions@e-consystems.com

See3CAM_CU27



Lens Datasheet

Revision 1.3

27 November 2023



Contents

Contents.....2

1 Revision History3

2 Introduction.....4

3 Description4

4 Optical Specifications.....5

5 Mechanical Dimensions6

Support.....7



1 Revision History

Rev	Date	Description	Author
1.0	08-10-2021	Initial Draft	Camera Team
1.1	22-08-2022	Box Enclosure Images added	Camera Team
1.2	09-09-2022	Mechanical Dimensions Image updated	Camera Team
1.3	27-11-2023	General Document updates	Camera Team



2 Introduction

See3CAM_CU27 is a 2 MP, UVC compliant, USB 3.1 Gen 1 SuperSpeed camera from e-con Systems, which has over two decades of experience in designing, developing, and manufacturing OEM cameras. It is the latest member of the See3CAM family of USB 3.1 Gen 1 SuperSpeed camera products launched by e-con Systems.

See3CAM_CU27 is based on the 1/2.8" SONY® STARVIS IMX462LQR CMOS sensor and the USB 3.1 Gen 1 interface. It is also backward compatible with the USB 2.0 high speed interface, albeit with fewer resolutions at lower frame rates.

See3CAM_CU27 does not require any drivers to be installed on the PC. The native UVC drivers of Windows and Linux Operating Systems (OS) will be compatible with this camera.

This document describes the optical specifications of lens used in See3CAM_CU27.

3 Description

The lens used in See3CAM_CU27 is a high resolution and 1/2.7" format lens. The lens provides a maximum field of view (FOV) of 121.35 degrees with 1/2.8" format IMX462LQR CMOS image sensor.

See3CAM_CU27 is available in two variants, which are, without casing (See3CAM_CU27_CHL_TC) and with casing (See3CAM_CU27_CHLCC_BX_H02R1).

The side view of See3CAM_CU27 without casing (See3CAM_CU27_CHL_TC) and with casing (See3CAM_CU27_CHLCC_BX_H02R1) are shown in following figures.



Figure 1: See3CAM_CU27 Without Casing





Figure 2: See3CAM_CU27 With Casing

4 Optical Specifications

The optical specification of lens is listed in below table.

Description	Specification
Image Format	1/2.7"
Focal Length	2.8 mm $\pm$ 5%
Aperture (F/#)	1.2 $\pm$ 5%
FOV	121.35°(D), 102.69°(H), 51.9°(V)
Distortion	Less than -16%
Chief Ray Angle	Less than 8°

Table 1: Optical Specifications of Lens



5 Mechanical Dimensions

The mechanical dimensions of lens used in See3CAM_CU27 is shown below.

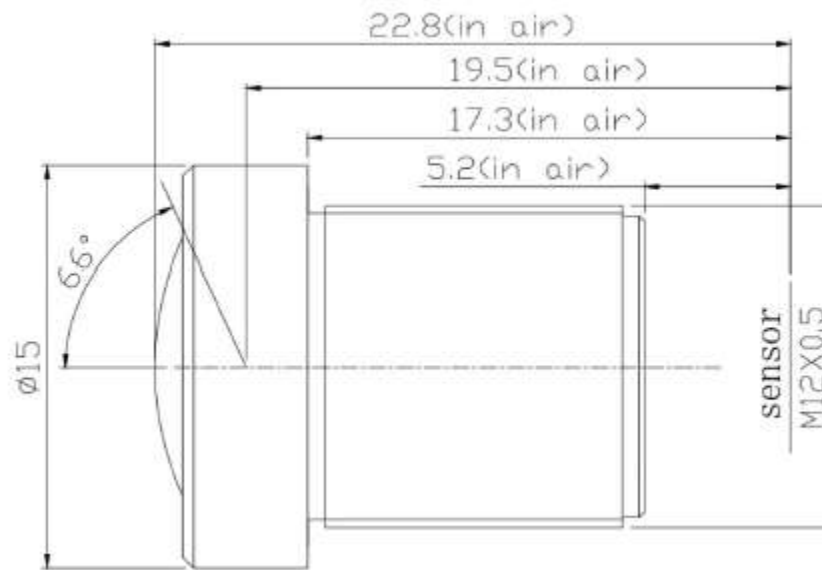


Figure 3: Lens Mechanical Dimensions

Note: All the dimensions are in mm.

The mechanical dimensions and layout details of lens used in See3CAM_CU27 are listed in below table.

Description	CMOS	IMX462
Layout Details	Dimension	25-50 mm
	Tolerance	±0.2

Table 2: Mechanical Dimensions and Layout Details of Lens



Support

Contact Us

If you need any support on SeeCAM_CU27 product, please contact us using the Live Chat option available on our website - <https://www.e-consystems.com/>

Creating a Ticket

If you need to create a ticket for any type of issue, please visit the ticketing page on our website - <https://www.e-consystems.com/create-ticket.asp>

RMA

To know about our Return Material Authorization (RMA) policy, please visit the RMA Policy page on our website - <https://www.e-consystems.com/RMA-Policy.asp>

General Product Warranty Terms

To know about our General Product Warranty Terms, please visit the General Warranty Terms page on our website - <https://www.e-consystems.com/warranty.asp>

