



FACULTY OF APPLIED SCIENCES
UNIVERSITY
OF WEST BOHEMIA

DEPARTMENT OF
COMPUTER SCIENCE
AND ENGINEERING



Master's Thesis

ARMv6 Processor Emulator for Raspberry Pi Environment Emulation

Jakub Šilhavý



PILSEN, CZECH REPUBLIC

2023



**FACULTY OF APPLIED SCIENCES
UNIVERSITY
OF WEST BOHEMIA**

**DEPARTMENT OF
COMPUTER SCIENCE
AND ENGINEERING**

Master's Thesis

ARMv6 Processor Emulator for Raspberry Pi Environment Emulation

Bc. Jakub Šilhavý

Thesis advisor

Ing. Martin Úbl

© 2023 Jakub Šilhavý.

All rights reserved. No part of this document may be reproduced or transmitted in any form by any means, electronic or mechanical including photocopying, recording or by any information storage and retrieval system, without permission from the copyright holder(s) in writing.

Citation in the bibliography/reference list:

ŠILHAVÝ, Jakub. *ARMv6 Processor Emulator for Raspberry Pi Environment Emulation*. Pilsen, Czech Republic, 2023. Master's Thesis. University of West Bohemia, Faculty of Applied Sciences, Department of Computer Science and Engineering. Thesis advisor Ing. Martin Úbl.

Místo této strany bude přední strana zadání vaší kvalifikační práce.

Místo této strany bude zadní strana zadání vaší kvalifikační práce.

Declaration

I hereby declare that this Master's Thesis is completely my own work and that I used only the cited sources, literature, and other resources. This thesis has not been used to obtain another or the same academic degree.

I acknowledge that my thesis is subject to the rights and obligations arising from Act No. 121/2000 Coll., the Copyright Act as amended, in particular the fact that the University of West Bohemia has the right to conclude a licence agreement for the use of this thesis as a school work pursuant to Section 60(1) of the Copyright Act.

V Plzni, on 10 September 2023

.....
Jakub Šilhavý

The names of products, technologies, services, applications, companies, etc. used in the text may be trademarks or registered trademarks of their respective owners.

Abstract

<TODO English>

Abstrakt

<TODO Czech>

Keywords

ARMv6 • Processor • Emulator • Raspberry Pi

Contents

1	Introduction	3
2	Computer Architecture	5
3	ARM Architecture	7
4	Emulation	9
5	Design of a Raspberry Pi Zero Emulator	11
5.1	Input	11
5.1.1	Executable and Linkage Format	11
5.2	User's Interaction	13
5.3	Core Components	14
5.3.1	System Bus	15
5.3.1.1	Managing Peripherals	16
5.3.1.2	Unaligned Memory Access	17
5.3.2	Executable and Linkage Format File Loader	18
5.3.3	BCM2835 Peripherals	19
5.3.3.1	Memory-mapped Registers	22
5.3.3.2	System Clock Listener	23
5.3.3.3	Random Access Memory	24
5.3.3.4	Debug Monitor	25
5.3.3.5	True Random Number Generator	26
5.3.3.6	ARM Timer	27
5.3.3.7	General Purpose Input/Output	29
5.3.3.8	Interrupt Controller	31
5.3.3.9	Auxiliaries	32
5.3.3.10	Broadcom Serial Controller	35
5.3.4	ARM1176JZF_S	36
5.3.4.1	Central Processing Unit Context	37
5.3.4.2	Instruction Set Architecture Decoder	38

5.3.4.3	Exceptions	40
5.3.4.4	Arithmetic-Logic Unit	41
5.3.4.5	Memory Management Unit	41
5.3.4.6	Central Processing Unit Core	44
5.3.5	Coprocessors	45
5.3.5.1	Coprocessor 15	46
5.3.5.2	Coprocessor 10	48
5.4	External Peripherals	49
5.4.1	External Peripheral Interface	49
5.4.2	Configuration	50
5.4.3	Examples of External Peripherals	51
5.4.3.1	Serial Terminal	52
5.4.3.2	Logic Analyzer	52
5.5	Logging System	52
5.6	User Interface	53
6	Development Process	55
6.1	Technologies	55
7	Testing	57
7.1	Unit Testing	57
7.2	Function Testing	57
7.3	System Testing	57
8	User Manual	59
9	Conclusion	61
	Bibliography	63
	List of Abbreviations	65
	List of Figures	67
	List of Tables	69
	List of Listings	71
10	Attachments	73

Introduction

1

Computer Architecture

2

A computer architecture can be generally considered a low-level principal design of a computer system that defines the interaction of its components that work alongside to accomplish a given task. While there are a number of different computer architectures, some of the most well-known architectures may include Intel, MIPS, ARM, or the newly introduced RISC-V architecture.

Computer architectures can be classified based on several different aspects, including how they handle data, the addressing modes they offer, how the memory is organized, and the number of arguments they expect in an instruction. All of these criteria must be considered when selecting the appropriate architecture for a specific application, as each one has its own advantages and disadvantages.

ARM Architecture

3

Emulation

4

Design of a Raspberry Pi Zero Emulator

5

When designing a complex software system, it is important to take into consideration deciding factors such as the intended usage environment, interaction methods, system dependencies, preferred technologies, or different components constructing the final application. Addressing these questions early on enhances the likelihood of its successful completion as well as its long-term maintainability.

This chapter outlines the key design decisions made within the implementation process of the **ZeroMate emulator**, which is the chosen name for the project ¹.

5.1 Input

The emulator necessitates a single input file in the ELF format, simplifying the booting process. In this process, the *stage 1 bootloader*, residing in ROM, reads the contents of the SD card and then initiates and delegates control to the GPU, which subsequently resets the CPU and loads the kernel into RAM.

This file is further referred to as the **kernel** since the emulator was designed within the context of operating systems development. Nevertheless, the input file can fundamentally represent any application intended for execution on Raspberry Pi Zero. Figure 5.2 illustrates the general process of building an ELF file, which contains all essential data and information required for code emulation.

5.1.1 Executable and Linkage Format

ELF stands for *Executable and Linkage Format* [1], and it is one of the most commonly used formats for executable files, especially on Unix-like systems. There are a number of other representations used in embedded development. For instance, the *Motorola S-Record format*, or SREC for short, is often used for programming non-volatile types of memory, such as flash or EEPROM.

¹ It combines the word *Zero*, as in Raspberry Pi Zero, and *Mate*, which in this case is used as a synonym for a friend or „buddy“.

In terms of this project, the key advantage of ELF over SREC is that ELF is **used for both linkage and execution**. Therefore, if the kernel is compiled with debug symbols turned on ², the symbol table stored in the final ELF file can be used during the parsing process, which is discussed in section 5.3.2, to provide the user with function names as they were used in the source code, which should improve the readability of the final disassembly. SREC, on the other hand, is **only used for execution**. Therefore, it can be viewed as highly compressed as it comprises only the necessary information for uploading firmware onto a microcontroller 5.1, which is commonly referred to as flashing.

It can be concluded that ELF provides more information that can be useful when reconstructing the original source code. Hence, it is used as the supported format for the input files. It is worth mentioning that this choice does not have as much impact on the core functionality as it does on visual aspects, which is discussed more in detail in section 5.6.

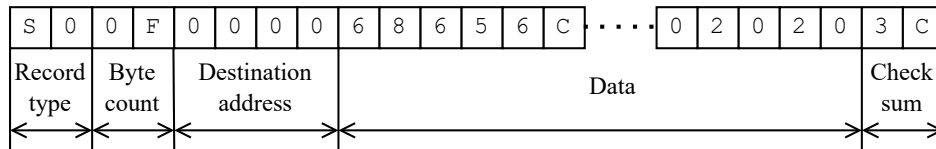


Figure 5.1: Single SREC record (16-bit addressing)

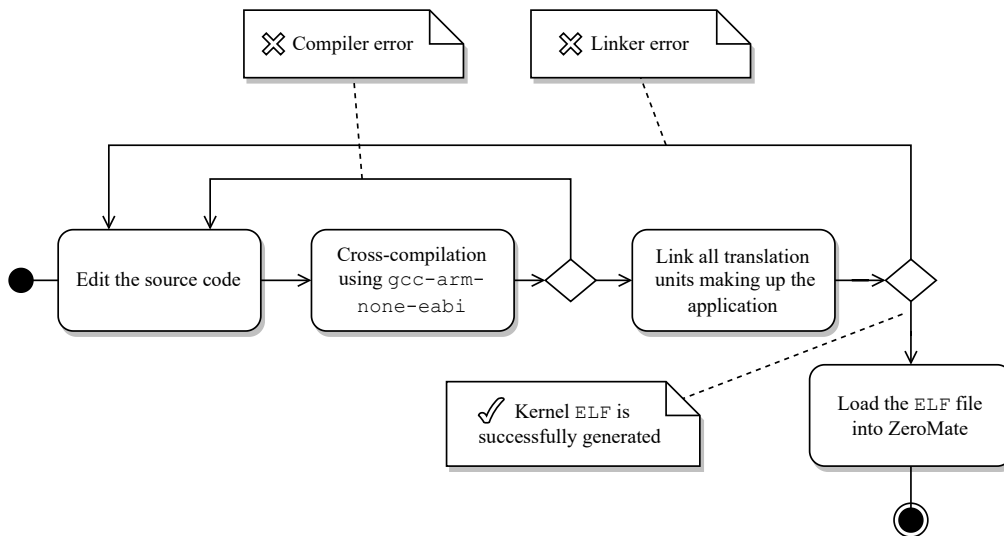


Figure 5.2: Process of building an ELF file (input for the emulator)³

²In the case of the `gcc-arm-none-eabi` compiler, the `-g -O0` flags should be used.

³Cross-compiling is a process where the source code targets a different platform than the one it is compiled on.

5.2 User's Interaction

As shown in the deployment diagram in figure 5.4, the emulator was **designed to run as a native desktop application on Windows, Linux, and MacOS operating systems**. It places a strong emphasis on visualization, serving as a debugging tool to assist with troubleshooting embedded applications targeting Raspberry Pi Zero.

The primary interaction with the system, from the user's perspective, is visualized in figure 5.3, where the user is provided with an interface that allows them to load an input file as well as to control the state of the emulation.

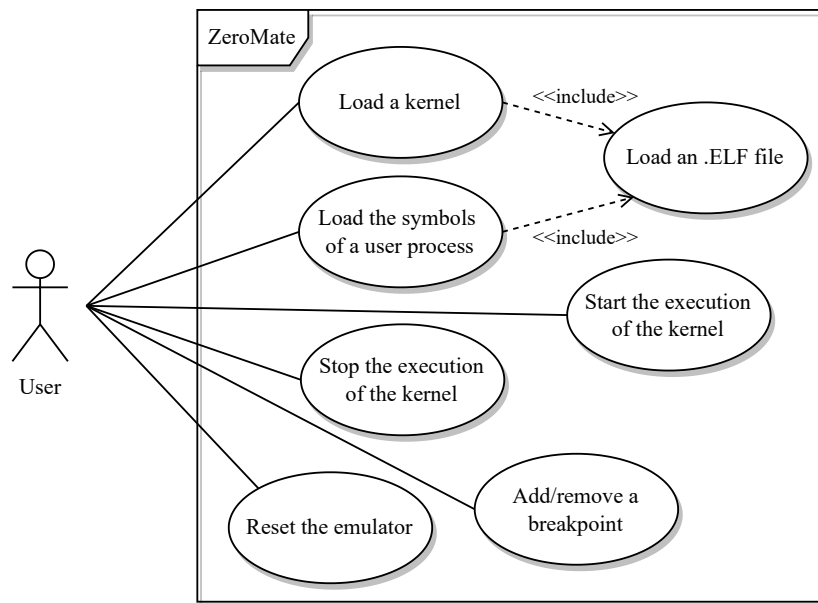


Figure 5.3: Primary use-cases of the ZeroMate emulator

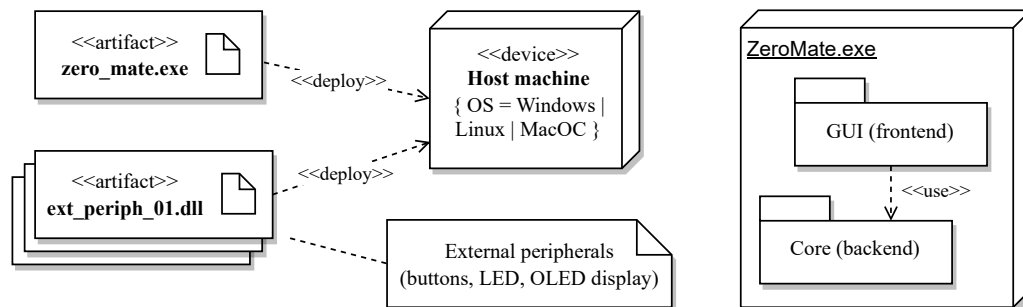


Figure 5.4: Deployment diagram of the ZeroMate emulator

The main application is designed as a **two-tier architecture**. In this arrangement, the top layer, which is the GUI, serves the dual purpose of visualizing data and acting as the primary user interface. The following chapters delve into the architectural structure of the core of the emulator.

5.3 Core Components

There are a number of different components working alongside to achieve a thorough emulation of a given kernel. Among these components, the `ARM1176JZF_S` component, which represents the CPU itself, may arguably stand out as the most complex one due to its encapsulation of various sub-components, including the CPU context, ALU, MMU, ISA decoder, and more. The role of every component will be examined further in the following sections.



Figure 5.5: Core components of the ZeroMate emulator

Figure 5.5 illustrates the fundamental interactions among the core components. It can be observed that the majority of the components communicate with one another via the system bus ⁴. For example, when the CPU executes a load/store instruction, it propagates the target address to the system bus, and the system bus then forwards the request to the corresponding peripheral associated with that address.

⁴What ZeroMate denotes as the system bus is typically regarded as the primary CPU bus.

5.3.1 System Bus

As mentioned previously, the system bus serves as an **intermediate unified interface** for accessing the RAM or any of the BCM2835 memory-mapped peripherals [2]. Each peripheral that is meant to be mapped into the address space must implement the same interface, so the bus can forward the read/write request independently of the peripheral's implementation (see section 5.3.3). All actions associated with the request itself are then handled internally within the target peripheral.

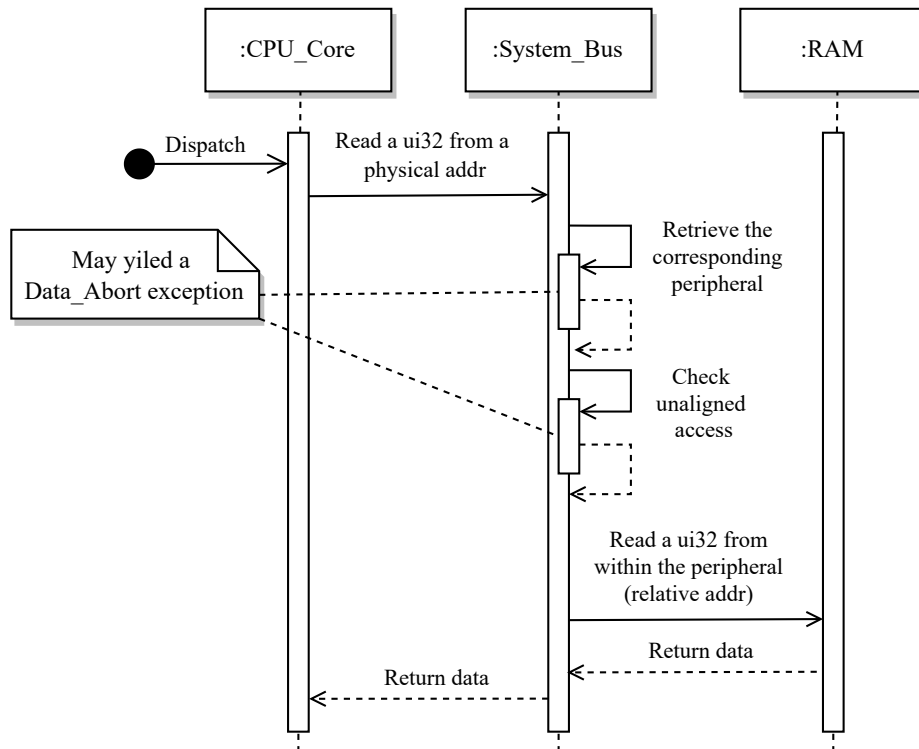


Figure 5.6: Example of a read/write data request issued by the CPU

As shown in figure 5.6, there are two internal steps the system bus carries out before proceeding with the request. First, the bus needs to determine what peripheral should the request be forwarded to. Secondly, it checks whether unaligned memory access is taking place or not.

In reality, the main system bus does not manage peripherals the same way it does in ZeroMate. It only serves as a medium for connecting different types of memory-mapped devices. Nevertheless, from an architectural point of view, it is a reasonable place for implementing common validity checks as it plays the role of a single point of access to all memory-mapped peripherals.

Additionally, the system bus ensures that the peripheral receives an **address relative to its location in the address space**⁵. In other words, it does not have any knowledge about its location on the bus, which is desired, as it decreases coupling and increases cohesion between the two components [3].

Source code 5.1: System bus interface for I/O operations

```

1 class CBus final {
2 public:
3     template<typename Type>
4     void Write(std::uint32_t addr, Type value);
5
6     template<typename Type>
7     [[nodiscard]] Type Read(std::uint32_t addr);
8 };

```

It can be argued that permitting the reading or writing of a general data type may diverge from real hardware specifications, as the system bus is typically of a fixed size, e.g. 32 bits. This simplification was made for convenience reasons when accessing predefined data structures in the RAM, such as the page table(s).

5.3.1.1 Managing Peripherals

The system bus component maintains a collection of references to all memory-mapped input-output devices, further referred to as MMIOs. Whenever a peripheral needs to be attached to the bus, it is inserted into the appropriate position within the collection. This ensures that the entire collection remains sorted in ascending order based on the starting addresses of the peripherals. This property enables the use of a binary search algorithm, resulting in faster lookup times, particularly in $O(\log_2 n)$ time complexity [4], which is crucial for improving the overall speed of the emulation.

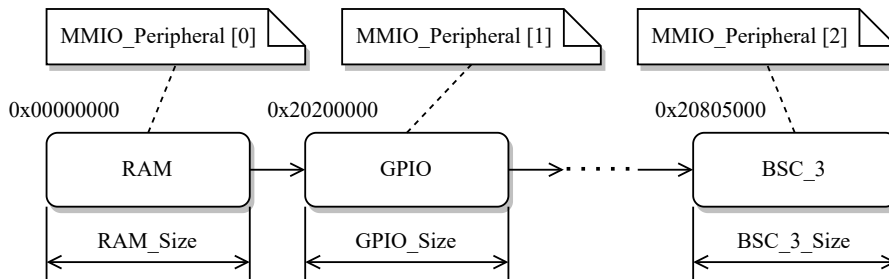


Figure 5.7: Collection of memory-mapped peripherals

⁵The relative address is calculated as the address contained in the R/W request issued by the CPU minus the address of the peripheral on the system bus.

According to statistics, on average, **load-store instructions account for more than 50% of all instructions in an x86 application** [5]. Although this research applies to a different architecture, it is reasonable to conclude that optimizing peripheral access efficiency might be crucial for emulation speed.

When connecting a peripheral, the bus must also ensure that there is no overlap between two peripherals and that they all fit within the address space, which, on a 32-bit architecture, spans out to 4GB.

5.3.1.2 Unaligned Memory Access

Unaligned memory access occurs when the **CPU attempts to read or write data from an address that is not divisible by the word size**. For example, reading 4 bytes from address 0x00000011 triggers unaligned access as the address is not word-aligned ⁶. Nevertheless, this behavior can optionally be disabled, for example, for compatibility reasons, in the system control coprocessor CP15 using the following sequence of instructions.

Source code 5.2: Enabling unaligned access in CP15

```
1 mrc p15, #0, r0, c1, c0, #0    ;@ Copy ctrl reg of CP15 to R0
2 orr r0, #0x400000              ;@ Set bit 22 in R0
3 mcr p15, #0, r0, c1, c0, #0    ;@ Update CP15
```

⁶A word is a fixed-size number of bits that the CPU can process as a single unit. In the case of ARM1176JZF_S, one word equivocates to 4 bytes.

5.3.2 Executable and Linkage Format File Loader

The main objective of this module is to **parse an input ELF** file and copy the `.text` section, **word by word**, into **RAM**, as specified by the linker script. Additionally, it performs code disassembly, which is a process of reconstructing the source code from machine code. This allows the user to observe individual instructions in a more user-friendly way as they are executed.

For visualization purposes, the component also features the capability to parse an ELF file without copying its data into memory, which can be useful for viewing user processes that are compiled separately from the kernel itself. During this process, the **ELF loader also demangles all symbols** found in the input file⁷, thereby presenting the user with function names that have not undergone modification by the compiler for its internal purposes.

Source code 5.3: Example of symbol demangling

```
1 Demangle("_ZNSt6vectorIiSaIiEE9push_backERKi") =
2 "std::vector<int, std::allocator<int>>::push_back(int,const&)"
```

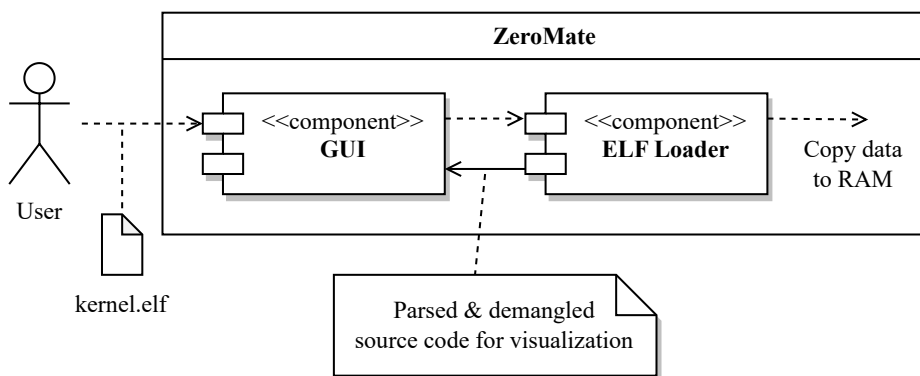


Figure 5.8: Loading an input ELF file (kernel)

⁷Demangling is a process of transforming C/C++ ABI identifiers (like RTTI symbols) into the original C/C++ source [6].

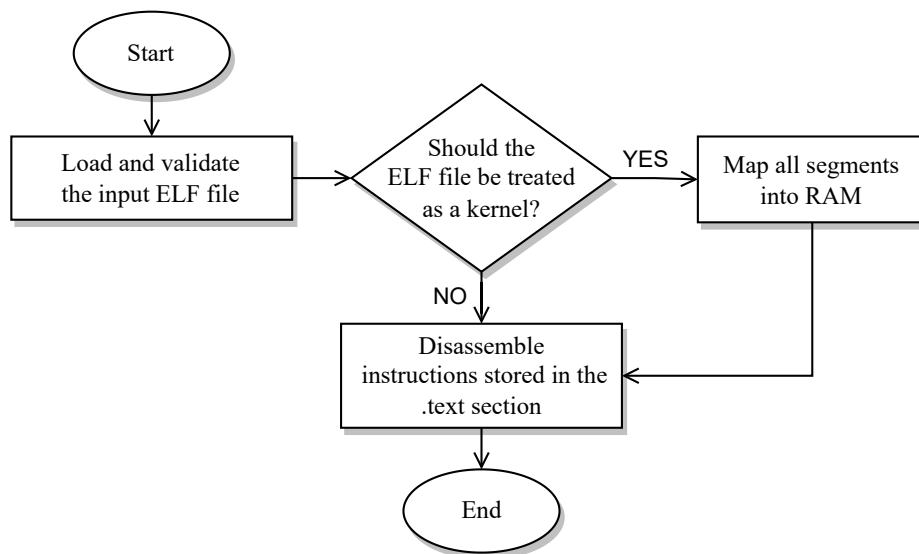


Figure 5.9: Internal logic of the ELF Loader component

It is important to emphasize that ZeroMate does not perform the tasks of parsing an ELF file and demangling symbols all by itself. Instead, it utilizes two external open-source libraries, *ELFIO* [7] and *Demumble* [8], to accomplish these functions.

5.3.3 BCM2835 Peripherals

ZeroMate distinguishes between two types of peripherals; those directly integrated with the microcontroller, such as RAM, ARM timer, or the interrupt controller, and those referred to as external peripherals, which are externally connected to another internal peripheral, the GPIO pins, forming a cascading set of connected peripherals. Examples of external peripherals may include buttons, switches, LEDs, displays, or keyboards. The following sections focus on the internal peripherals of Raspberry Pi Zero.

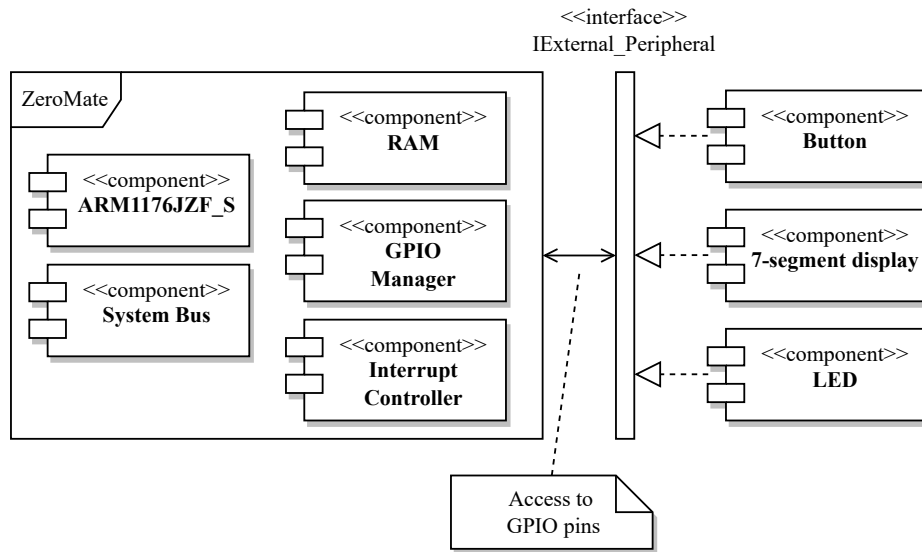


Figure 5.10: Internal vs External peripherals

In section 5.3.1, it is explained that the system bus manages a collection of references to all peripherals that are mapped into the address space. Using a general interface, the bus does not need to be concerned about how each peripheral functions internally. It simply forwards a R/W request initiated by the CPU to the corresponding peripheral.

Every BCM2835 peripheral encapsulates a set of registers, whose functions are detailed in the manual [2]⁸. By reading from or writing to these registers, the internal state of the peripheral can be modified, which is specific for each peripheral.

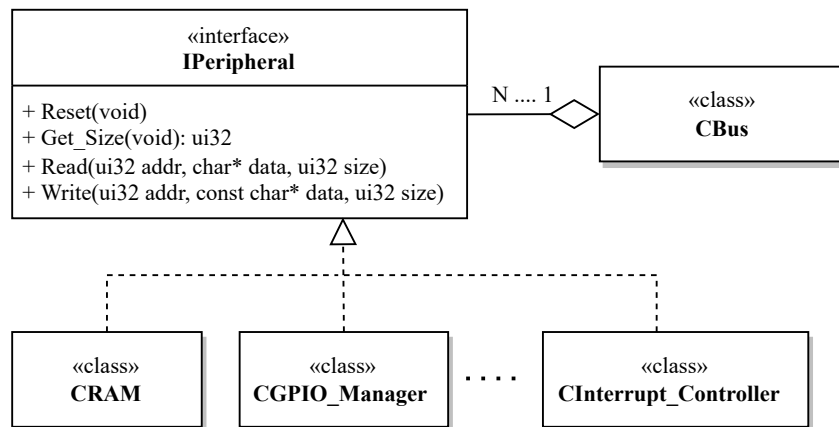


Figure 5.11: Hierarchy of internal peripherals

The `Get_Size()` method is used primarily for detecting bus collisions when

⁸The BCM2835 manual is known to contain several typographical errors. As a result, the community surrounding it published a list of these errors along with their respective corrections [9].

mapping peripherals into the address space, which was mentioned previously in section 5.3.1.1.

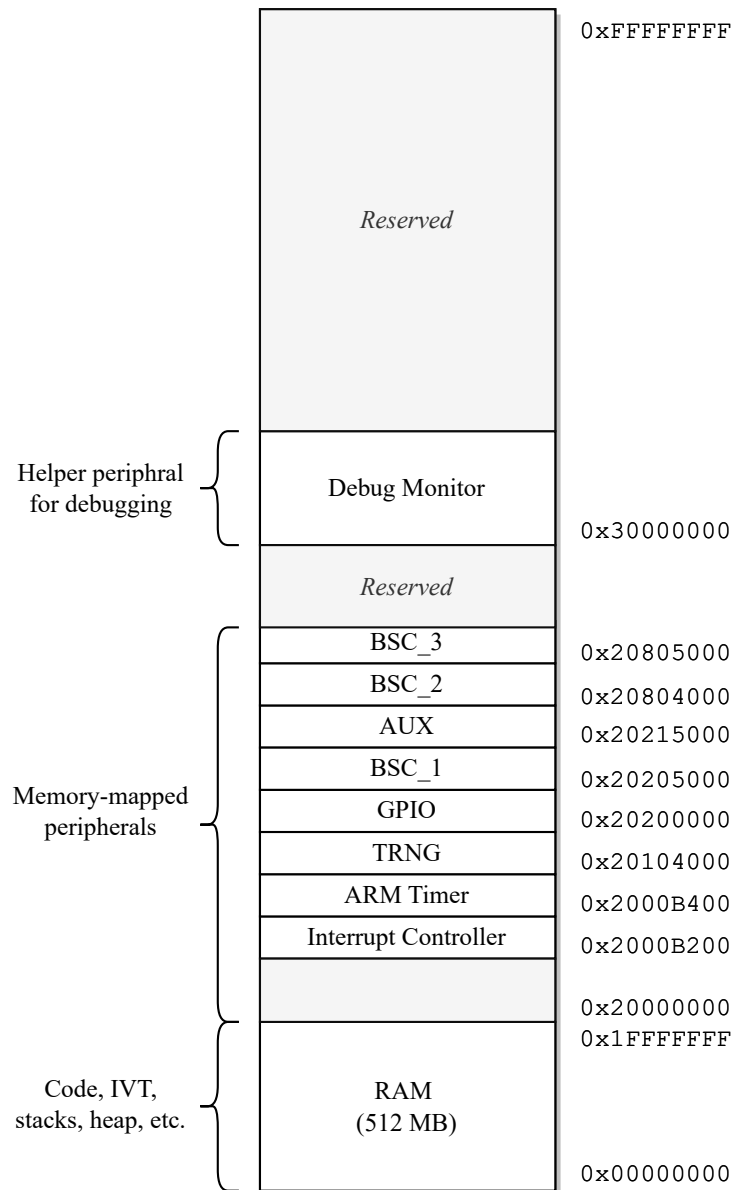


Figure 5.12: BCM2835 physical memory layout emulated by ZeroMate

It can be noticed that **ZeroMate does not account for all BCM2835 peripherals** since emulating every single one in its entirety would pose a significant complexity. Consequently, ZeroMate focuses emulation efforts on the most frequently utilized peripherals, such as the ARM timer, GPIO, IC, and others.

Nonetheless, the system's overall design is structured to allow for a smooth integration of additional peripherals in the future if needed. The following sections

explain the fundamental emulation principles of each of the peripherals listed in figure 5.12.

5.3.3.1 Memory-mapped Registers

As mentioned previously, each BCM2835 peripheral encapsulates a set of registers, through which the user can interact with the peripheral. From an implementation perspective, these registers can be represented as a fixed-size array of 32-bit integers, which are addressed relative to the peripheral's base address.

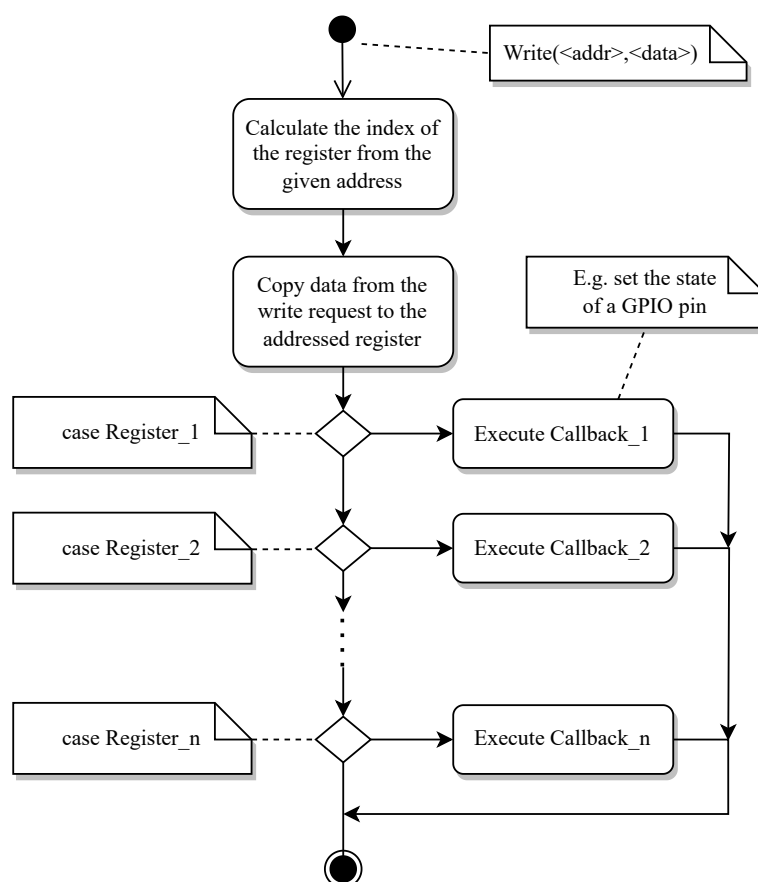


Figure 5.13: Writing to a peripheral's register⁹

Whenever a read/write request is sent through the bus, the peripheral identifies the addressed register, and the execution is then dispatched to the corresponding callback function, which carries out the necessary actions associated with that

⁹Reading works in a similar way. Optionally, there might be some prior actions taken before the value of the register is copied from the peripheral, such as inserting a random number into the data register when utilizing TRGN 5.3.3.5.

specific register. Generally, this approach can be applied to the vast majority of memory-mapped peripherals.

5.3.3.2 System Clock Listener

Optionally, each peripheral can implement the `ISystem_Clock_Listener` interface, which allows it to register with the CPU as a system clock listener. Whenever an instruction is executed, the CPU notifies all of its system clock listeners of how many CPU cycles it took to execute the instruction, allowing them to update themselves accordingly. Examples of such listeners may include the ARM Timer 5.3.3.6 or the AUX 5.3.3.9 and BSC 5.3.3.10 peripherals, which encapsulate time-based hardware communication functions.

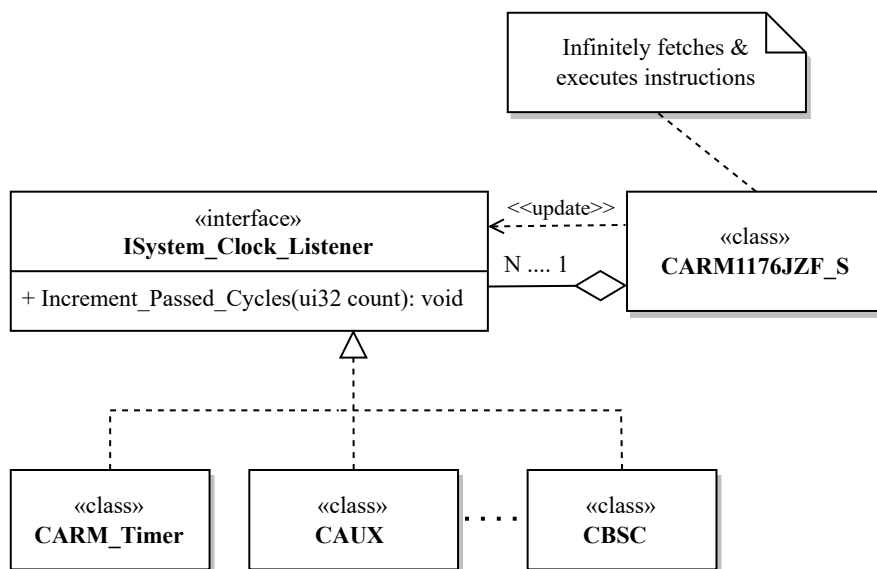


Figure 5.14: `ISystem_Clock_Listener` interface

It is important to mention that **updating a system clock listener is, from the emulated CPU's perspective, a blocking operation**. Therefore, the peripheral's callback function should avoid any unnecessary actions that might further prevent the CPU from executing the next instruction. Alternatively, updating system clock listeners could be performed asynchronously within a separate thread. However, this approach would introduce additional concurrency-related challenges that would require thorough consideration.

5.3.3.3 Random Access Memory

From an oversimplified perspective, a computer consists of two essential components; the CPU and memory. One key parameter used to classify various types of memory is their ability to retain data even after the power supply is shut down. Raspberry Pi Zero is equipped with an SD card slot, which houses non-volatile ¹⁰ memory for storing the kernel image. However, from ZeroMate's point of view, this type of memory is implicitly provided by the host machine.

The board is also featured with 512MB of RAM, which functions as volatile memory for executing the kernel code. It accommodates runtime-critical sections such as the stacks ¹¹, heap, page tables, or the interrupt vector table, often referred to as the IVT.

The implementation of RAM is straightforward since it can be represented as an array of bytes as shown in the figure 5.15 below. However, the downside of this approach is that it immediately takes up 512 MB of the host's RAM, which may become an issue on older computers with limited resources.

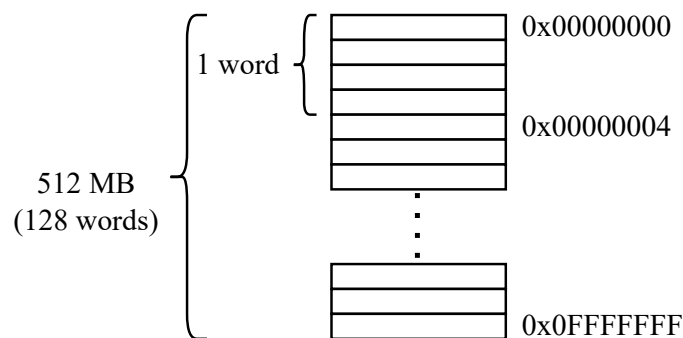


Figure 5.15: RAM implementation as a continuous piece of memory

A more effective approach would involve dynamically allocating fragmented pieces of memory as they are being addressed by the CPU. However, the author would argue that such an implementation would be algorithmically more complex, which could lead to distracting errors when implementing memory-related instruction, especially in the early stages of development. As a result, it was classified as a *nice-to-have* feature that would be worth addressing in the future once the emulator has been thoroughly QA-tested.

¹⁰Non-volatile memory is capable of persisting data even after the supply voltage is turned off.

¹¹ARM1176JZF_S uses a different set of registers for each CPU mode.

5.3.3.4 Debug Monitor

The debug monitor plays the role of a memory-mapped output device for displaying 8-bit character-based information.

The component is not included in Raspberry Pi Zero itself; its presence serves solely for debugging purposes during the development of ZeroMate.

The ZeroMate project also includes a basic driver of the peripheral that the user can seamlessly integrate into their build system. This allows them to use „**print-like**“ **functions** they might be familiar with from high-level programming languages, which may result in easier troubleshooting and resolving errors.

Source code 5.4: Demonstration of the use of the debug monitor

```

1 #include "monitor.h"
2
3 int main() {
4     bool flag = false;
5     unsigned int my_var = 155;
6
7     sMonitor << "Hello_World\n";
8     sMonitor << "myVar_=" << my_var << '\n';
9     sMonitor << "flag_=" << flag << '\n';
10
11     return 0;
12 }

```

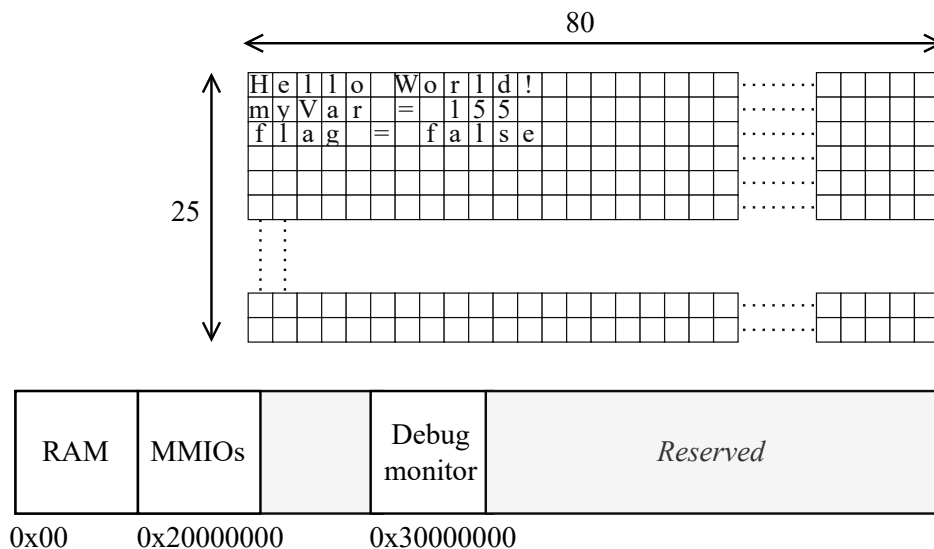


Figure 5.16: Memory-mapped debug monitor

To attain the same capabilities in practice, the user would need to utilize a form of serial communication, such as UART, through which they could transmit characters to an external device¹². This is commonly achieved by running software like *PuTTY* [10] on the user's computer.

As shown in figure 5.16, the debug monitor is mapped to an unoccupied address 0x30000000. It is structured as a flat memory region, which is managed by the driver the user code interacts with. The size of the monitor was chosen to be 80x25 8-bit characters¹³.

5.3.3.5 True Random Number Generator

The TRGN peripheral is an integrated 32-bit hardware random number generator. Although it is not documented in the official BCM2835 manual [2], its existence can be confirmed, for instance, by examining the implementation in the GNU/Linux kernel [11].

For simplification purposes, ZeroMate primarily focuses on providing random numbers while omitting more advanced features such as configuring the generator's speed, generating interrupts, or the warm-up count. The warm-up count refers to the process of generating and immediately discarding a set of random numbers before the initialization is completed¹⁴.

From the user's code perspective, the process of **retrieving a random number consists of two steps**, which are displayed in figure 5.17.

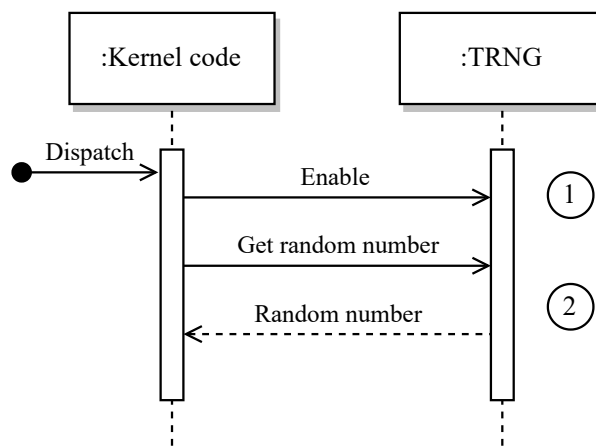


Figure 5.17: Reading random numbers from the TRNG peripheral

¹²While there are alternative methods to achieve the same functionality, this approach is among the most common ones.

¹³From an implementation point of view, it could vary in size as long as it does not overlap with other memory regions.

¹⁴The initial values are „less random“.

Enabling TRNG.

The TRNG peripheral is enabled by setting bit 0 of the **control register** to 1. If implemented, this action would also trigger the processing of „warming up“, which was mentioned previously.

Reading random numbers.

First, the user should check the availability of random numbers in the TRNG's queue by examining the most significant 8 bits of the **status register**. If this number is 0, they should wait until the generator accumulates a sufficient amount of entropy to generate a random number. When data is ready, reading from the **data register** will retrieve a random number from the queue.

ZeroMate can almost instantly generate a random number using a pseudo-random number generator. As a result, when reading the most significant 8 bits of the status register, the user will consistently receive the value 1, meaning they can read random numbers without delay.

Utilizing a pseudo-random number generator, such as an *LCG* [12] or *Mersenne-Twister*, **can greatly improve the performance of the emulation**. Depending on the implementation, accessing a true random number generator via the host operating system may have a detrimental impact on overall speed, as it may continually gather entropy from user inputs, like key presses or cursor movements. This can potentially lead to a blocking operation if there is currently insufficient entropy available.

5.3.3.6 ARM Timer

One of the most frequently used functions of the ARM timer is to periodically trigger interrupts, whether it is for toggling an LED, generating a PWM signal, or switching the current CPU context, which is an integral part of any preemptive OS scheduler.

As shown in figure 5.18, there are two data/control paths through which the timer can be interacted with. The first path, when the timer is treated as a memory-mapped peripheral, serves the purpose of reading from and writing to its internal registers in order to configure its desired functionality. This may involve steps such as setting up the prescaler, enabling interrupts, or defining the initial threshold value. The other path is used implicitly by the CPU to notify the peripheral about how many CPU cycles it took to execute the last instruction. The ARM timer then leverages the prescaler to divide the input frequency, as the main CPU frequency may not always be suitable for the given task.

As far as ZeroMate is concerned, all time-related functionalities, such as the ARM timer, UART, or I²C, are for synchronization purposes, inherently derived from the CPU's clock.

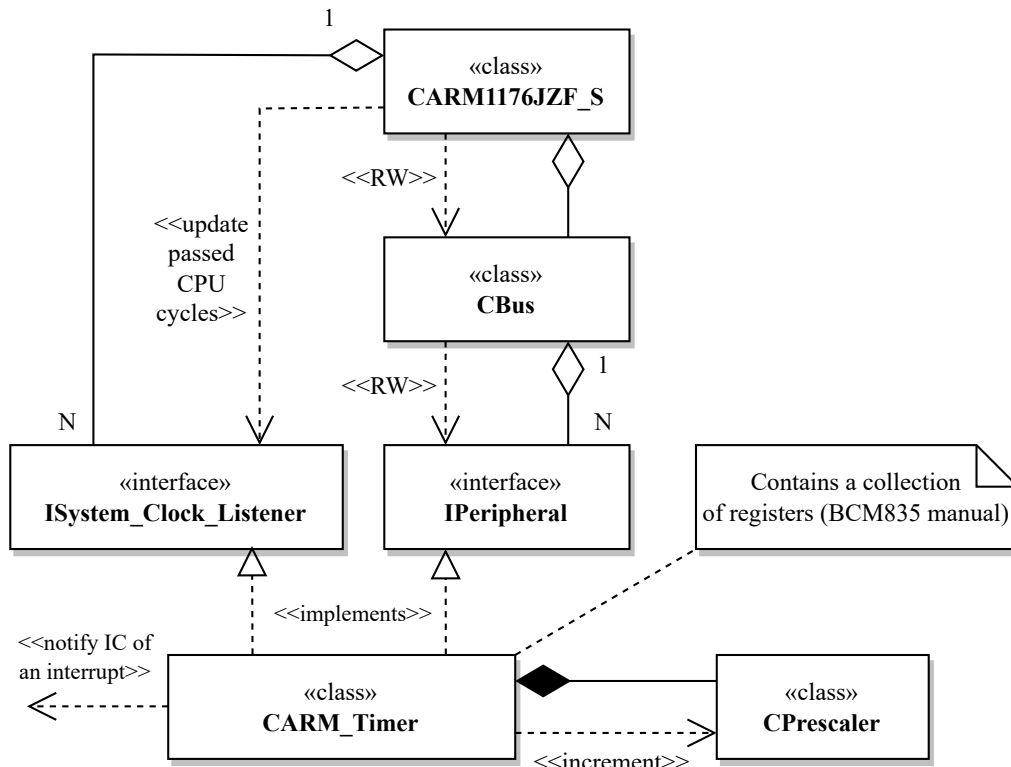


Figure 5.18: Context of the ARM timer component

As stated previously, the purpose of the prescaler is to divide the CPU's frequency by a factor of 1, 16, or 256, which ultimately affects the timer's period - how rapidly the **value register** counts down to zero. Additionally, the timer's period can be adjusted by modifying the value in the **load register**, which serves to re-initialize the value register whenever it reaches zero. If enabled, with each such event, the timer will trigger an interrupt. This concept is visualized in figure 5.19.

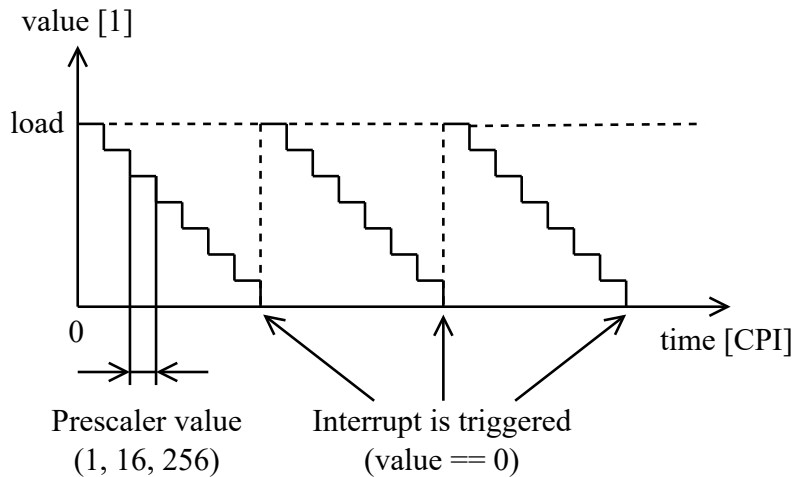
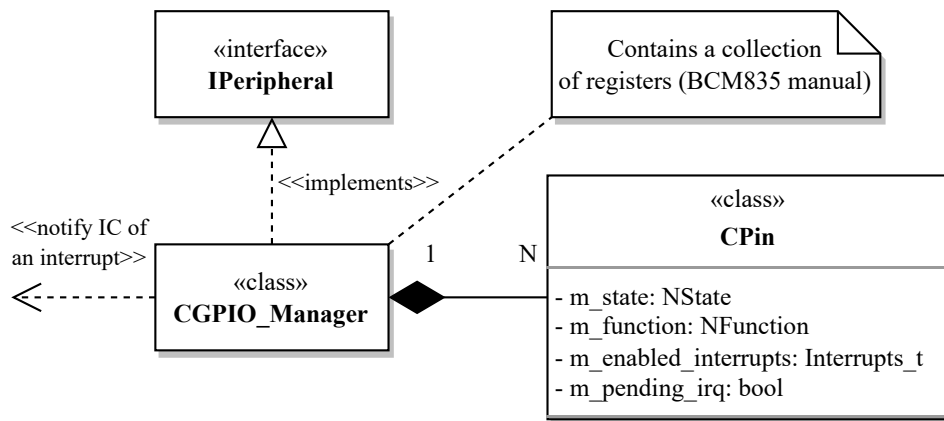


Figure 5.19: Content of the value register of the ARM timer over time

5.3.3.7 General Purpose Input/Output

The GPIO manager is a peripheral that manages the **54 general-purpose input-output pins** (GPIO) that are available to the programmer. These GPIO pins also function as a connecting interface for all external devices, which is shown in figure 5.10. Each pin is represented as a separate class encapsulating its current state, which consists of the pin's function, a list of enabled interrupts, an indication of any pending interrupts, and its current state.

Figure 5.20: Structure of the GPIO manager¹⁵

All GPIO pin functions, as well as interrupt types, can be found explained in the BCM2835 manual [2].

The pin's function restricts the way the pin can be interacted with. For instance, when the user tries to read from an output pin, they will be prompted with a warning

¹⁵The CPin class also exposes a set of functions that allow the caller to access its private members.

message indicating that their action is inconsistent with the current pin configuration.

ZeroMate does not provide support for analog pins. Therefore, all GPIO pins mentioned in this document are regarded as digital pins, with only two possible states, HIGH and LOW.

Emulation of latches.

Some of the GPIO registers work, on a hardware level, as latches, which may not be as intuitive from a software emulation point of view. An example of this principle would be the GPSETx and GPCLR_x registers, which respectively set an output pin to a logical one and zero. These registers are stateless, meaning they do not retain their previous state internally. One approach to emulate such behavior is to reset the register to its default value after a write operation has been performed.

Source code 5.5: SW emulation of a HW latch register

```
1 void Set_Pin_High(std::uint32_t& gpset0)
2 {
3     // Iterate over all bits of gpset0.
4     // If gpset0[i]==1, then set the
5     // corresponding pin to HIGH.
6
7     gpset0 = 0; // SW latch emulation
8 }
```

Detecting Interrupts.

Whenever the state of a pin changes, a series of checks is performed to determine whether an interrupt has occurred. One of the most commonly used types of interrupts is triggered by a change in the logical value of a specific pin, either transitioning from HIGH to LOW or vice versa. The types of interrupt to be detected for each pin can be specified in the corresponding registers. When an interrupt is detected, it is reported to the interrupt controller, which can then initiate further actions, which is captured in figure 5.20.

5.3.3.8 Interrupt Controller

The interrupt controller serves as the primary interface for managing all peripherals that can generate interrupts. Through the interrupt controller, users can enable or disable various interrupt sources, including GPIO pins, the ARM timer, and the UART peripheral. **When an interrupt is signaled to the interrupt controller, it checks whether the source is enabled; otherwise, the event is disregarded.**

From the CPU's point of view, after an instruction is executed, it checks with the interrupt controller to ascertain the existence of any pending interrupts. If the interrupt controller has a record of a pending interrupt, and global interrupts are enabled, the CPU proceeds to throw an IRQ exception.

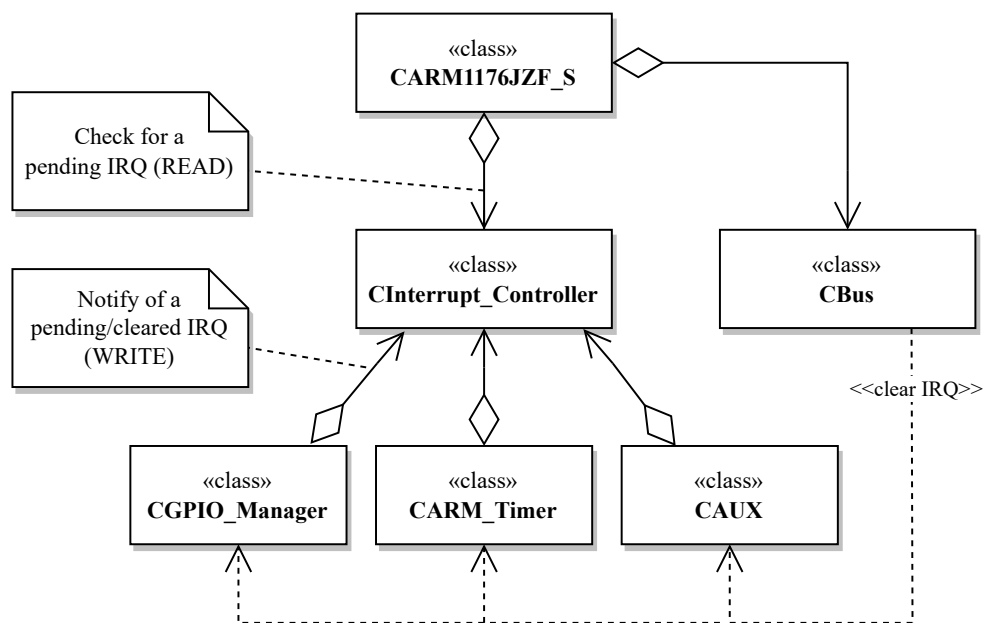


Figure 5.21: Context of the interrupt controller

In terms of design, the interrupt controller encapsulates an associative storage that pairs each IRQ source ¹⁶ with its associated metadata, indicating whether it is enabled and if there is a pending interrupt. From the CPU's perspective, this storage is read-only, as its only purpose is to check for any pending interrupts. The contents of this storage are modified by the peripherals themselves, either when they generate an interrupt or clear a pending interrupt.

The ARM1176JZF_S processor also features so-called fast interrupts, or FIQ for short. However, ZeroMate does not offer support for it as it primarily focuses on fundamental principles rather than more advanced features.

¹⁶You can find a comprehensive list of all available IRQ sources in the BCM2835 datasheet [2].

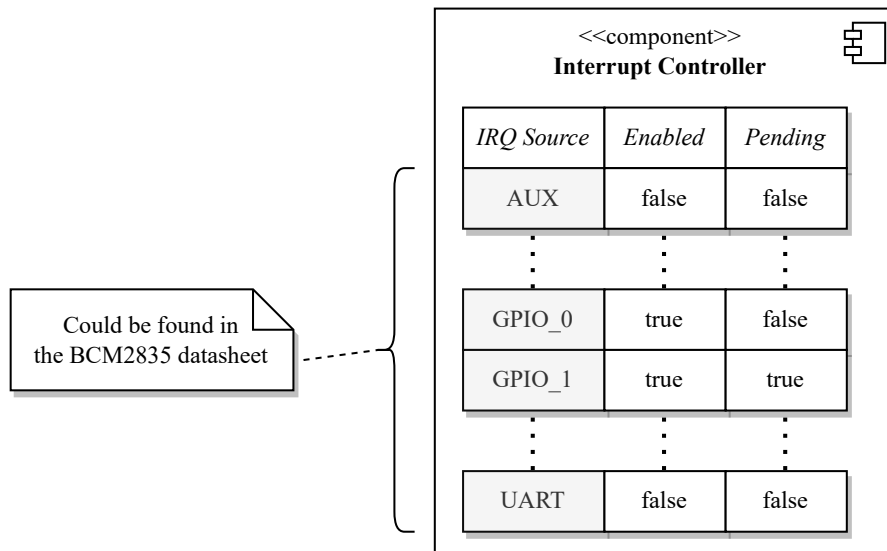


Figure 5.22: Encapsulated information about IRQ sources

It is worth mentioning that the interrupt controller of the BCM2835 microcontroller distinguishes between two types of interrupt sources: Basic IRQ and IRQ, both of which are listed in the BCM2835 datasheet [2]. Nevertheless, from a design perspective, the underlying principles remain the same.

5.3.3.9 Auxiliaries

The auxiliary peripheral comprises three distinct peripherals: Mini_UART, SPI_0, and SPI_1. Among these, only Mini_UART is currently supported by Zero-Mate.

There are two primary registers shared among all auxiliary peripherals: the **enable** register, responsible for activating the respective peripheral, and the **IRQ** register, which signals pending interrupts. The remaining registers are specific to each peripheral, as depicted in the figure below.

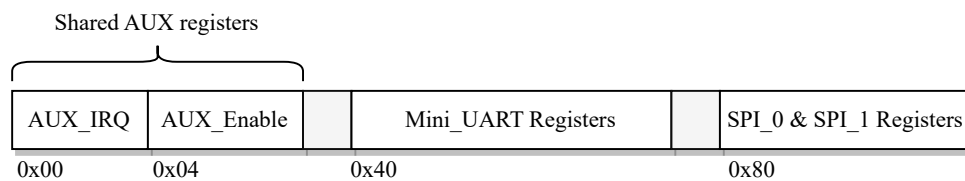


Figure 5.23: Registers of the AUX peripheral

Whenever a read/write request is received, using the technique described in section 5.3.3.1, the **AUX** class can efficiently redirect the execution to the relevant auxiliary peripheral, which will subsequently handle the request internally.

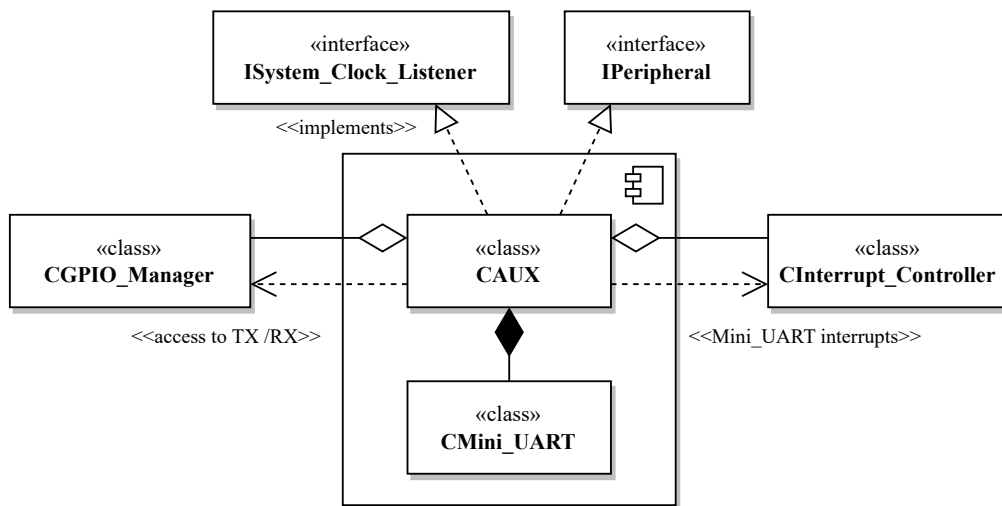


Figure 5.24: Structure of the AUX peripheral

Figure 5.24 shows the internal structure and dependencies of the AUX peripheral. It can be noticed that it implements the `ISystem_Clock_Listener` interface 5.3.3.2, which allows it to synchronize with the rest of the system.

Mini_UART.

UART, short Universal Asynchronous Receiver-Transmitter, inherently operates as asynchronous communication, which means there is no explicit synchronization between the two devices. Since these devices may have different clock speeds, they must adjust their frequencies to establish a common speed known as the baudrate, which expresses how many bits can be received/transmitted per second.

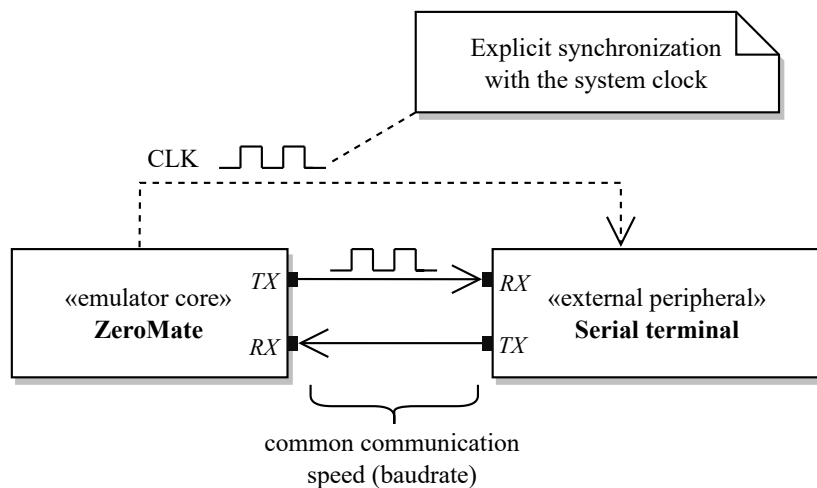


Figure 5.25: UART communication with an external peripheral

The BCM2835 microcontroller does not incorporate a full version of UART. Instead, it supports a simplified version known as `Mini_UART`, which omits some of

the extended features. As a result, the user is only able to modify the baudrate and the number of data bits transferred within a single frame, which can be either seven or eight. The remaining parameters, such as parity and the number of stop bits, are fixed according to the datasheet [2].

In ZeroMate, all external peripherals are provided read-only access to the system clock, enabling them to synchronize themselves if required. This approach contradicts the fundamental principles of asynchronous communication since it introduces a form of synchronization. However, this design decision was made to enhance the emulation's reliability while still enabling users to utilize `Mini_UART` as if they were interacting with real hardware.

The implementation of `Mini_UART` communication can be accomplished through a state machine driven by a pre-divided system clock as shown in figure 5.27. When a predefined number of CPU cycles have passed, the state machine updates itself to transmit and receive the next bit of the current data frame, which can be seen in figure 5.26¹⁷.

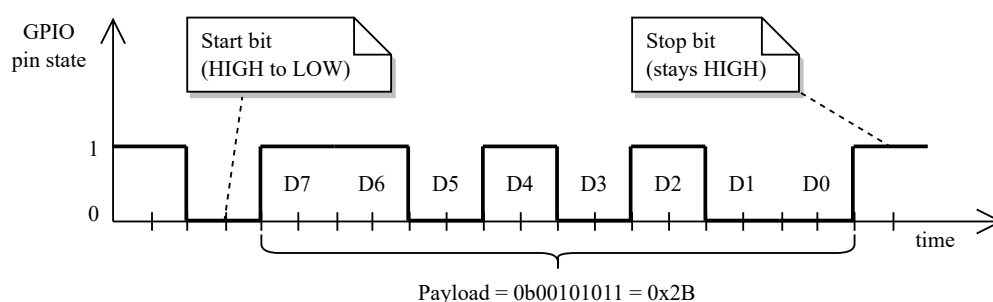


Figure 5.26: Example of a `Mini_UART` data frame with 8 bits of data

Receiving data can be implemented in a similar manner. Instead of setting the value of the `TX` pin, the state machine reads the value of the `RX`, which has been set previously by the external peripheral.

¹⁷Transmitting a single bit can be done by setting the corresponding `TX` pin to the desired value. Further details on what GPIO pins are designated for `Mini_UART` can be found in the datasheet [2].

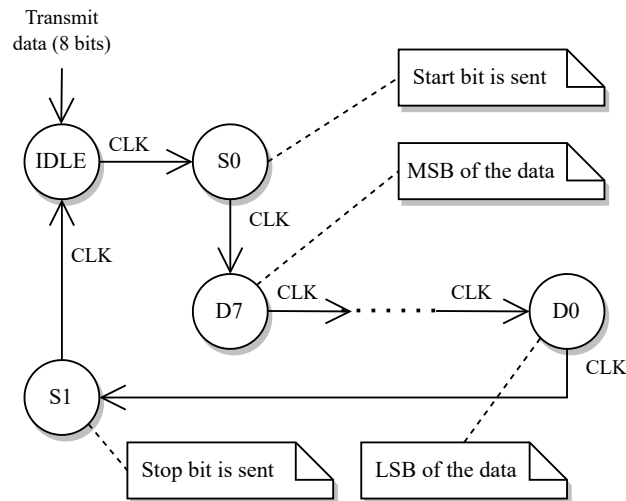


Figure 5.27: Mini_UART state machine (transmitting 8 bits)

5.3.3.10 Broadcom Serial Controller

The Broadcom serial controller, often abbreviated as BSC, is a peripheral device that allows the user to communicate with external devices, typically sensors, using the I²C protocol, which is a synchronous serial communication standard. I²C utilizes two GPIO pins: SDA for data transmission and SCL for synchronization. Raspberry Pi Zero is equipped with three of these devices that can be found mapped to their respective addresses in figure 5.12.

From a design point of view, the emulation of an I²C bus is nearly identical to UART, with the primary distinctions being the frame structure and the synchronous transmission of individual bits using an additional GPIO pin instead of the emulated CPU's clock.

While there are various configurations of the I²C communication protocol ^a, ZeroMate exclusively supports only one, which is presented in figure 5.28. As stated previously, ZeroMate emphasizes the emulation of fundamental principles, rather than attempting to implement every conceivable configuration, which would only add unnecessary complexity without delivering any added value.

^aThey vary in voltage levels for representing logical 1 and 0, as well as in how they define the start and stop bits using the SDA and SCL signals.

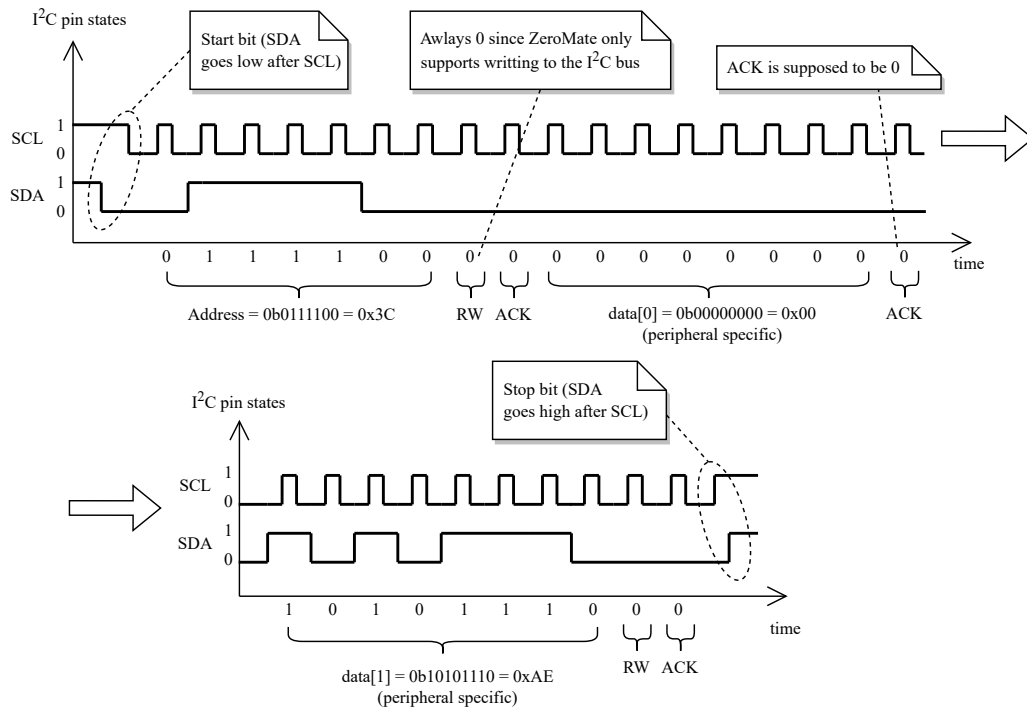


Figure 5.28: Structure of an I²C frame

The ZeroMate emulator comes with several standalone external peripherals that employ the same communication interface. Users can connect these peripherals to the system based on their preferences using a configuration file, which is further discussed in section 5.4.

5.3.4 ARM1176JZF_S

All the previously mentioned peripherals are not self-sufficient in operation; they require external control. This is where ARM1176JZF_S, which serves as the central processing unit in the BCM2835 microcontroller, comes into play, as it executes individual 32-bit ARM instructions that may utilize these peripherals in various ways.

In terms of architecture, the ARM1176JZF_S component is divided into several tightly integrated building blocks, as shown in figure 5.29, to maintain a structured and organized design. The subsequent sections detail how each of these sub-peripherals contributes to the overall emulation of the ARM1176JZF_S processor.

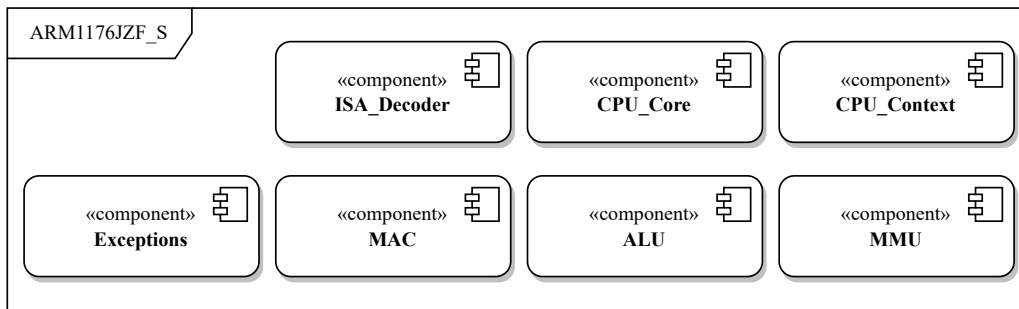


Figure 5.29: Internal components of the ARM1176JZF_S processor

5.3.4.1 Central Processing Unit Context

The **CPU context** functions as an encapsulation of the current state of the CPU, including details such as the current contents of the registers and the active CPU mode. It is designed to provide an interface for accessing registers, enabling transitions between different modes, and offering other utility functions that abstract the underlying low-level logic, such as reading the state of individual bits of the control register.

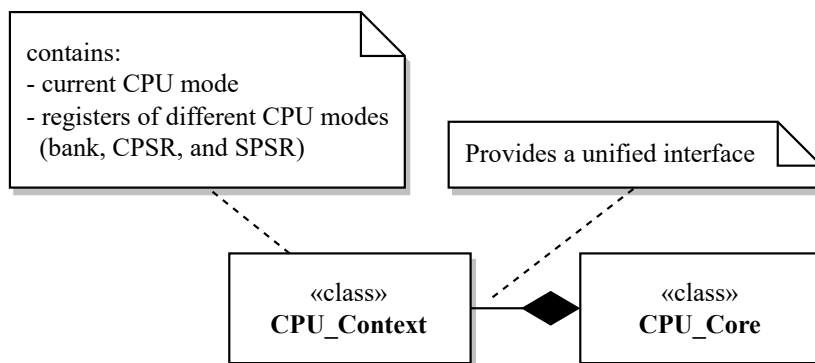


Figure 5.30: Relationship between the CPU context and the CPU core

Bank Registers.

One of the presented challenges involves implementing so-called *bank* registers, where each CPU mode possesses its distinct subset of registers that are automatically loaded when the mode changes. Additional information regarding this topic is available in section A2.3 of the official ARM Architecture Reference Manual [13].

As illustrated in listing 5.6, one approach to address this challenge involves creating a lookup table for all bank registers within each CPU mode, effectively replacing the ones used in the User/System mode, which are otherwise used by default.

Source code 5.6: Retrieving a CPU register

```
1 uint32_t& Get_Register(uint32_t idx, NCPU_Mode mode)
2 {
3     // Check if a banked register should be returned
4     if (m_banked_regs.at(mode).contains(idx))
5         return m_banked_regs[mode][idx];
6
7     // A non-banked register is being addressed
8     return m_banked_regs[NCPU_Mode::System][idx];
9 }
```

Control Registers.

The current program state register and the saved program state registers, commonly known as the CPSR and SPSR registers, are implemented in a similar way, with each CPU mode having its designated pair of these registers.

5.3.4.2 Instruction Set Architecture Decoder

The primary role of the instruction set architecture decoder, abbreviated as the ISA decoder, is to analyze a 32-bit value and ascertain the type of the ARM instruction it represents, so it could be treated and decoded accordingly. This task must be executed with the utmost efficiency, as it is repetitively performed for each instruction the CPU executes.

In the case of the emulated CPU, the ISA decoder functions as a „black box“ offering a single-function interface, as demonstrated in listing 5.7 below.

Source code 5.7: Interface of the ISA decoder

```
1 // Returns the type of a given 32-bit ARM instruction
2 [[nodiscard]] static CInstruction::NType
3 Get_Instruction_Type(uint32_t instruction) noexcept;
```

The typical and sole use-case of this interface is further illustrated in the sequence diagram shown in Figure 5.31. In this diagram, the CPU fetches the next instruction from RAM and employs the ISA decoder to determine its type, enabling it to proceed with the execution.

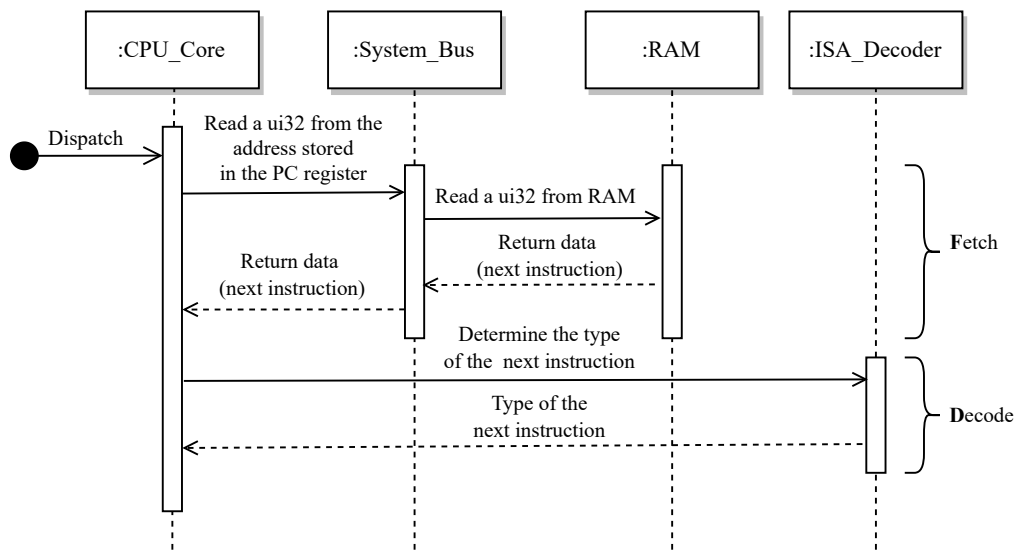


Figure 5.31: Use of the ISA decoder by the CPU

Internally, the ISA decoder maintains a look-up table of instructions masks that are sequentially applied to the given 32-bit value until the operation's result matches the expected value associated with the current mask. Each mask serves the purpose of zeroing out the variable bits specific to the instruction, leaving only the known bits in place, the expected value, which is then used to unambiguously determine the type of instruction.

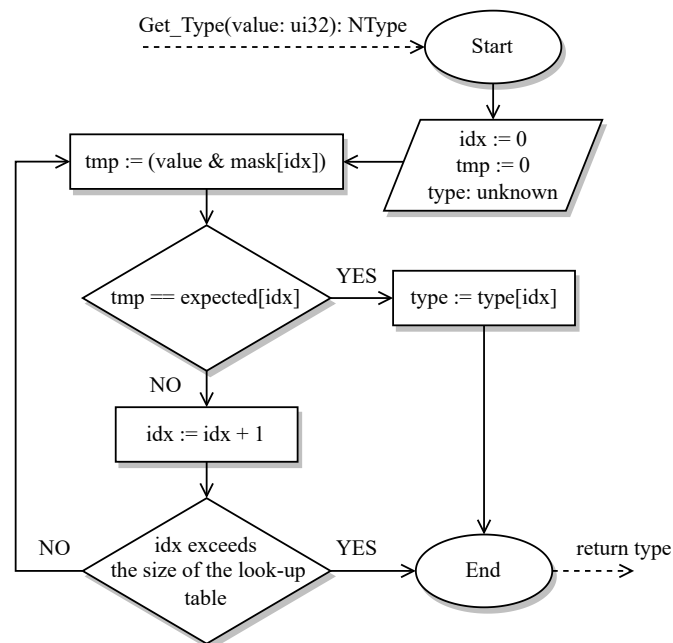


Figure 5.32: Algorithm for decoding ARM instructions

Figure 5.32 shows the algorithm for decoding ARM instructions, which, in the

worst-case scenario, operates with time complexity of $O(n)$, where n represents the size of the look-up table. **To ensure unambiguous decoding, it is essential to test the bit masks in a specific order, starting with the most restrictive one and proceeding to the least restrictive one, based on the number of bits set within each mask.** Otherwise, there might be a risk of incorrectly identifying the instruction type, inevitably leading to unexpected behavior.

Once an instruction is classified, the 32-bit value can be encapsulated within its corresponding class representation, providing an interface to access the specific fields relevant to that instruction. The contents of the look-up table can be constructed using resources such as the B2 Appendix authored by Andrew Sloss and Chris Wright, which provides ARM instruction encodings [14].

5.3.4.3 Exceptions

Exceptions can originate from various components within the ZeroMate emulator. These exceptions may arise from factors such as the absence of an addressed page, unaligned memory access, or the execution of a privileged instruction in a non-privileged CPU mode. ZeroMate handles ARM CPU exceptions as run-time errors on the host machine. As a result, the emulated CPU core must be prepared for the possibility that the currently executing instruction may abruptly trigger an exception that must be properly handled. Figure 5.33 shows the hierarchy of CPU exceptions, where each class may include additional information pertaining to the exception, such as a descriptive message, the address at which it occurred, or the address of the vector associated with that specific exception.

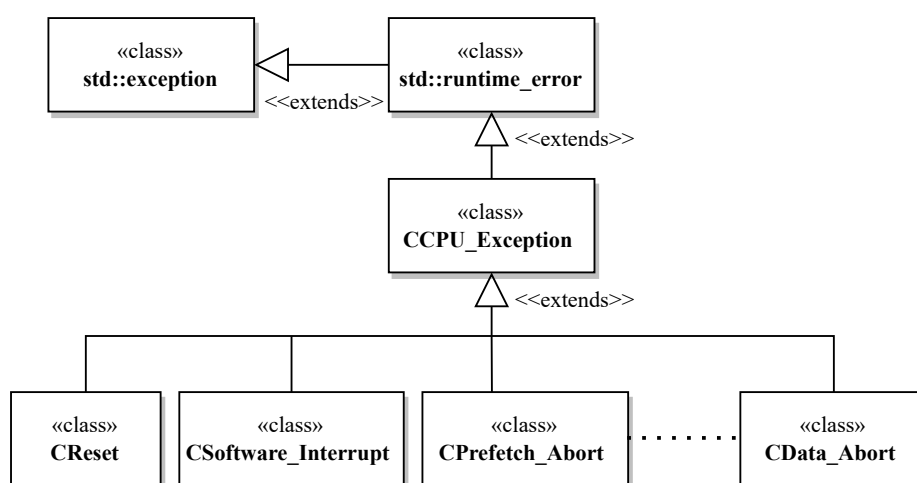


Figure 5.33: Hierarchy of the CPU exceptions

5.3.4.4 Arithmetic-Logic Unit

As the name suggests, the arithmetic-logic unit, also known as the **ALU**, is responsible for carrying out **arithmetic and logical operations**, such as addition, subtraction, comparison, etc.

From a design standpoint, the ALU can be envisioned as a set of collaborative functions concealed behind a single function interface, which is made accessible to the central processing unit as shown in figure 5.34.

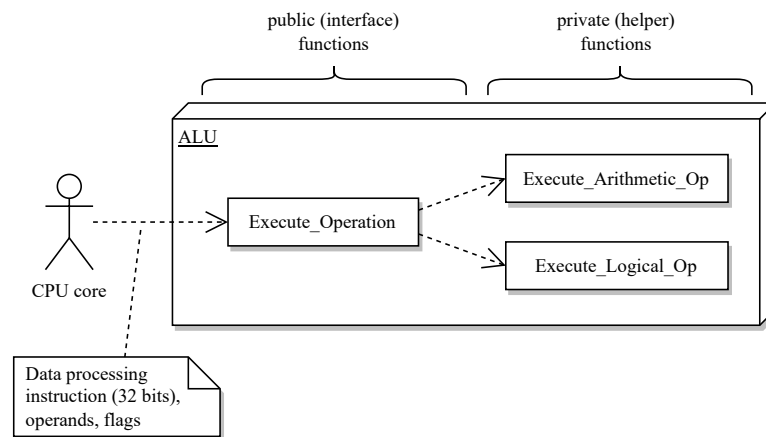


Figure 5.34: Architectural structure of the ALU

As illustrated in the figure above, when the ALU is employed, the CPU must provide both the current state of its flags and the data processing instruction currently in execution, which is internally analyzed by the ALU to determine the specific type of operation to be carried out.

MAC Unit.

The ARM1176JZF_S also incorporates a module referred to as **MAC**, specifically designed for performing a variety of **multiplication operations**. These operations can involve the multiplication of either signed or unsigned 32-bit integers, signed or unsigned 64-bit integers, or multiplication with addition, where a third value is added to the result of the multiplication. All instruction encodings can be found in the B2 Appendix document [14]. From an implementation perspective, it can be integrated in a manner similar to the ALU.

5.3.4.5 Memory Management Unit

If enabled, the memory management unit, often referred to as the **MMU**, comes into play just before the CPU sends a read/write request to the system bus. **Its primary function is to convert a 32-bit virtual address into a corresponding 32-bit**

physical address based on the information stored in the corresponding page table, allowing the user to reorganize the address space to their needs. Furthermore, it performs a series of checks, the failure of which could result in a MMU abort ¹⁸.

1. In the initial step, the MMU retrieves the page associated with the address from the first-level page table to ascertain its type. This type indicates whether it references a nested second-level page table or a physical frame. In the latter case, the MMU also confirms the page's presence in RAM, as it might have been swapped out, for example, to a file.
2. When addressing a physical frame, the MMU checks access privileges to the targeted frame based on the current mode of the CPU in order to ensure that no security policy is being violated.

If all checks have been successfully passed, the MMU proceeds to convert the virtual address into a corresponding physical one. More detailed information about how the MMU operates can be found in chapter 6 of the ARM1176JZF_S Technical Reference Manual [15].

The ZeroMate emulator lacks support for nested page tables, which inevitably introduces certain limitations in the emulation. As a result, it utilizes a first-level page table that spans over the entire address space.

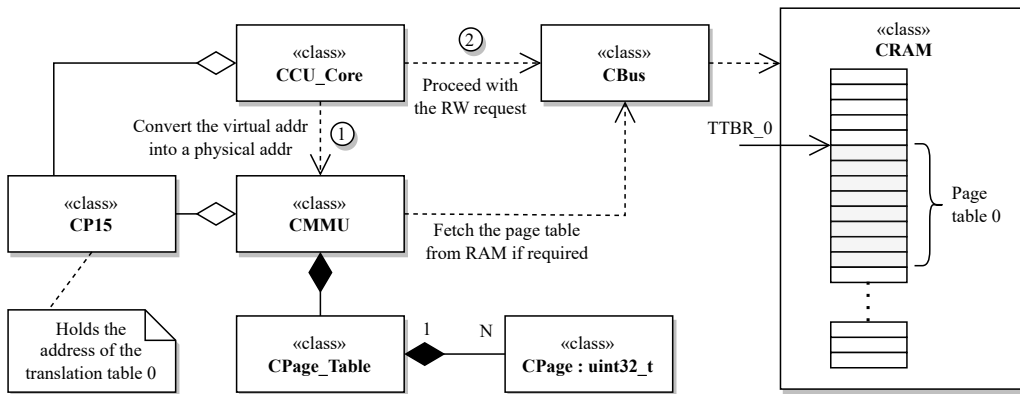


Figure 5.35: Utilization of the MMU when processing a RW request

Placing a strong emphasis on the Memory Management Unit (MMU), Figure 5.35 illustrates the essential steps to be taken when executing a read/write instruction. Whenever the address of page table 0 changes in the TTBR_0 register, the MMU retrieves the entire page table from RAM and stores it within its private data structure.

¹⁸Users of the x86 architecture might already be acquainted with the concept of a *page fault*, which, in this context, can be thought of in a similar way.

This approach eliminates the need to repeatedly read it for each memory access, which would otherwise negatively impact the overall performance of the emulation. Once a physical address is obtained, the CPU can then proceed with the request.

Implementation.

The implementation of a first-level page table can be tacked as an array of 4096 classes called `CPage`¹⁹. These classes serve as an abstraction for accessing individual fields of individual pages, where each page is represented as a 32-bit value.

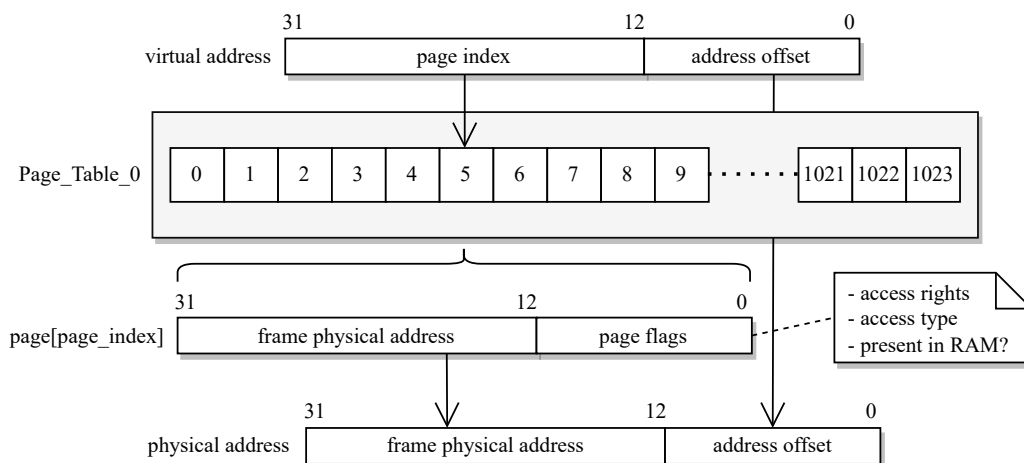


Figure 5.36: Structure of the first-level page table

Translation Lookaside Buffer.

Once a virtual address undergoes the process of translation, it is stored, along with its corresponding physical address, in a look-up table²⁰. In a real system, this table is known as the Translation Lookaside Buffer, or TLB for short. The next time the same address is used, it doesn't have to go through the translation process again, which enhances performance. When a request is made to invalidate the TLB through coprocessor 15, ZeroMate clears this associative data structure to prevent invalid addressing across various virtual address spaces.

¹⁹Assuming the page granularity is 1MB, covering the entire 4GB address space requires 4096 page table entries.

²⁰It can be implemented, for instance, as an `std::unordered_map<uint32_t, uint32_t>`

5.3.4.6 Central Processing Unit Core

The central processing unit utilizes the functionality of all previously mentioned components. In terms of design, it is composed of multiple private member functions that are invoked based on the type of instruction currently being executed. These functions can be seen as microprograms, as they handle the specific operations associated with the current instruction.

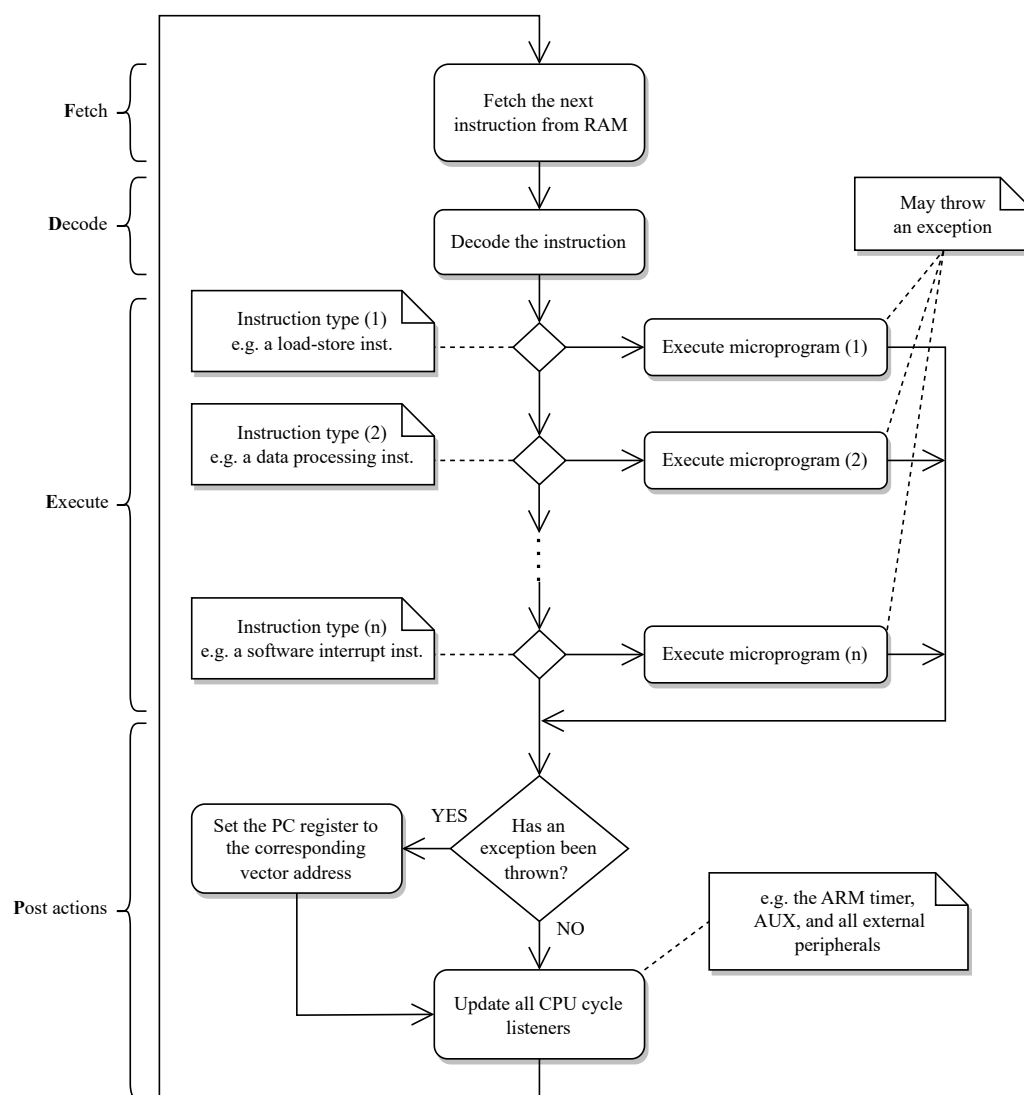


Figure 5.37: Execution loop of the emulated CPU

As shown in figure 5.37, the microprograms are called within an infinite loop known as the execution loop, which fetches the next instruction from RAM, decodes it using the ISA decoder, and directs the execution to the appropriate microprogram responsible for carrying out the necessary steps to execute the instruction. These

steps may include tasks such as reading data from the stack, modifying register contents, utilizing the arithmetic-logic unit, and more.

It is worth noting that a real system is significantly more complex than how ZeroMate implements it. However, the author would contend that any form of emulation involves trade-offs that result in the omission of certain details.

Catching Exceptions.

As described in section 5.3.4.3, the CPU must handle any exceptions that may arise during the execution of the current instruction. When an exception occurs, the CPU switches to the corresponding mode, saves the return address in the link register, as if it were invoking a function call, and sets the address of the next instruction to the value stored at the corresponding offset in the interrupt vector table.

Updating CPU clock listeners.

As discussed in section 5.3.3.2, prior to advancing to the next instruction, the CPU informs all peripherals subscribed as system clock listeners about the number of CPU cycles required to execute the previous instruction.

While it is true that each instruction may require a varying number of CPU cycles for execution, in the current implementation, ZeroMate empirically averages this number to 8, which presents a potential area for future improvement. Users should be aware that the emulation speed does not match the speed of real hardware, and they may need to adjust timings in their firmware accordingly.

5.3.5 Coprocessors

ZeroMate takes into account two coprocessors, the design and functionality of which are described in the following two sections. Although their capabilities may be somewhat limited compared to what a real system offers, they serve the purpose of demonstrating the fundamental principles of interactions that can also be applied in practice.




Figure 5.38: Component diagram of the CPU and its coprocessors

The CPU communicates with individual coprocessors through three types of instructions: *data transfer*, *register transfer*, and *data operation*. When the emulated CPU detects a coprocessor instruction, it does not perform any further analysis but

promptly delegates it to the appropriate coprocessor, determined by the ID encoded within the instruction itself. The coprocessor then internally performs decoding and execution of the instruction using technique similar to that used by the emulated CPU.

Although the ZeroMate emulator currently accommodates only two coprocessors, its overall design allows for a seamless integration of additional ones in the future, should the need arise. As shown in figure 5.39, the CPU maintains a collection of available coprocessors, all of which implement the same interface, through which they are controlled by the CPU.

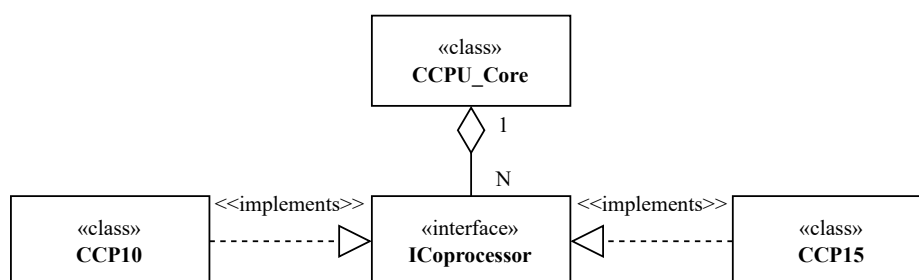


Figure 5.39: Coprocessor hierarchy

5.3.5.1 Coprocessor 15

The system control coprocessor (CP15) comprises a tree-like hierarchy of 32-bit registers that are used to enable a variety of additional features. These features include caching policy, branch prediction, unaligned memory access, setting up access to other coprocessors, and many more²¹. As far as ZeroMate is concerned, its emulation efforts are directed primarily towards the following registers.

Table 5.1: List of emulated CP15 registers

Primary register	Secondary register	Index	Description
C1	C0	0	Control Register (see table 5.2)
		2	Coprocessor Access Control Register
C2	C0	0	Translation Table Base Register 0 (TBBR_0)
		1	Translation Table Base Register 1 (TBBR_1)

(table continues on the next page)

²¹The list of all registers along with their functions can be found detailed in chapter 3 of the ARM1176JZF_S Technical Reference Manual [15].

Table 5.1 (continued from the previous page)

Primary register	Secondary register	Index	Description
		2	Translation Table Base Control
C8	C7	0	Invalidate unified TLB unlocked entries

Other frequently used CP15 registers are implemented for the purpose of completeness, even though modifying them has no effect. If a user's firmware attempts to write to an unimplemented register, a warning message will be displayed.

Table 5.2: List of emulated flags of the CP15 control registers

Bit position	Description
0	Enables the MMU
13	Determines the location of exception vectors (0x00000000 vs 0xFFFF0000)
22	Enables unaligned data access operations

From an emulation perspective, CP15 serves as an organized repository of information that is queried from within other components of the application, so they can appropriately carry out their designated actions.

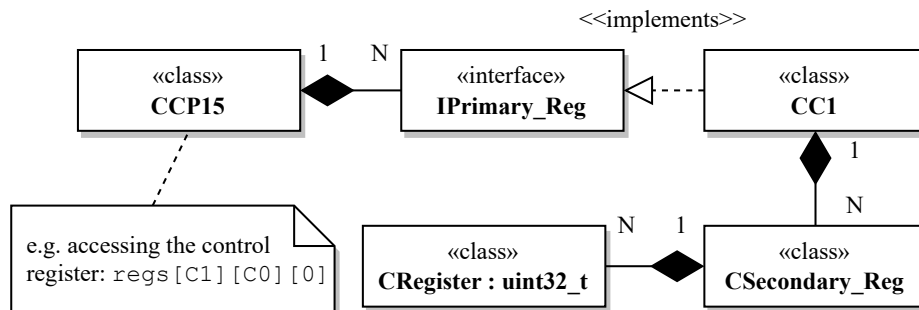


Figure 5.40: Design of the coprocessor 15 register hierarchy

5.3.5.2 Coprocessor 10

Coprocessor 10 allows users to work with single-precision (32-bit) floating-point numbers. The design of this coprocessor closely resembles that of the CPU, as illustrated in figure 5.37. In this design, each instruction is first decoded and consequently executed within a private member function, which can be considered a microprogram.

While ZeroMate supports most common vector floating-point instructions of version 2 (VFPv2 ^a), including addition, subtraction, multiplication, division, and square root, it simplifies its implementation by omitting support for various rounding modes and floating-point exceptions.

^aAll VFP instruction can be found listed in chapter C3 of the ARM1176JZF_S Technical Reference Manual [15].

In terms of design, the floating-point unit, commonly denoted as the FPU, consists of an array of 32 internal registers, each 32 bits in size. Despite representing floating-point numbers, their underlining data type remains `uint32_t`, enabling seamless data exchange between the CPU and the FPU. However, it is essential to emphasize that all operations must be executed as floating-point operations. As a result, the 32-bit number can be encapsulated within a class that overrides its math operators, effectively hiding implementation details from the caller. Whenever an operation needs to be carried out, the register internally performs the following steps.

1. For all operands, convert the raw 32-bit value into a `float` using the IEEE 754 floating-point representation [16]. This conversion can be accomplished through the helper member function shown in source code 5.8.
2. Carry out the floating-point operation.
3. Store the result back as a `uint32_t` using the same technique demonstrated in source code 5.8.

Source code 5.8: Conversion between `uint32_t` and `float`

```
1  template<typename Type>
2  [[nodiscard]] Type Get_Value_As() const
3  {
4      return std::bit_cast<Type>(m_value); // since C++20
5  }
```


5.4 External Peripherals

All the modules described previously form the core of the emulator, which is compiled as a standalone application. Furthermore, the **ZeroMate emulator offers a public single-header interface that enables the implementation of third-party external peripherals**, which can be compiled independently of the toolchain used for the core itself. In other words, users can choose their preferred programming language for developing an external peripheral, with the condition that they implement the interface and compile it as a shared library ²².

Using a configuration file, these external peripherals can be then loaded by the core at runtime, enabling the user to create a custom circuit of external peripherals. Compiling as a shared library offers the advantage of creating multiple instances of the same peripheral. For instance, the user can employ multiple instances of `led.dll` to assemble a traffic light system, which can then be controlled by their firmware.

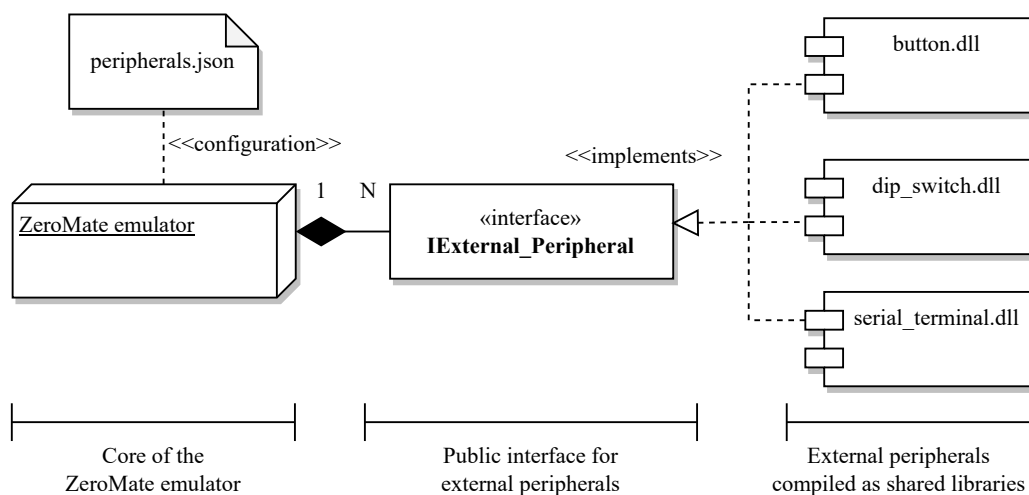


Figure 5.41: External peripheral interface

5.4.1 External Peripheral Interface

Upon construction, every external peripheral is given access to GPIO pins, as it is their primary way of interaction with the core of the emulator. The interface also mandates that they implement a `Get_GPIO_Subscription` function, responsible for returning a set of GPIO pins they wish to subscribe to ²³. Whenever the state of a GPIO changes, the emulator iterates through all external peripherals, examining

²²The format of a shared library is `.dll` on Windows and `.so` on Linux, respectively.

²³ZeroMate allows for connecting multiple external peripherals to the same GPIO pins, effectively creating a parallel connection.

their GPIO subscriptions, and duly informing them of the change. Additionally, they receive information about the number of CPU cycles required to execute the last instruction, the same way internal peripherals do, effectively serving as an emulated replacement for an independent system clock.

Certain external peripherals, such as a serial terminal, come with their own system clock. However, in ZeroMate, all timing functions derived from the emulated CPU frequency.

Optionally, they are provided access to the logging system, which proves to be invaluable for debugging or providing insights into their current state. External peripherals are not obliged to feature a graphical user interface; nevertheless, they are implicitly provided with a context pointer that they can utilize to render themselves within each frame.

5.4.2 Configuration

Upon startup, ZeroMate attempts to read a single configuration file in the JSON format that details the connections of external peripherals. Table 5.3 outlines the obligatory fields that must be provided for every peripheral. ZeroMate handles the construction and management of all external peripherals within its dedicated address space on the host machine.

Table 5.3: Information stored in `peripherals.json`

Field	Example	Description
<code>name</code>	"7-segment Display"	Unique name associated with the peripheral
<code>connection</code>	[2, 3, 4]	Set of GPIO pins the peripheral is connected to
<code>lib_dir</code>	"peripherals"	Directory where the shared library is held
<code>lib_name</code>	"seven_seg_display"	Name of the shared library

Figure 5.42 provides a visual representation of a custom connection that connects two 7-segment displays in parallel, having them to simultaneously display the same information.

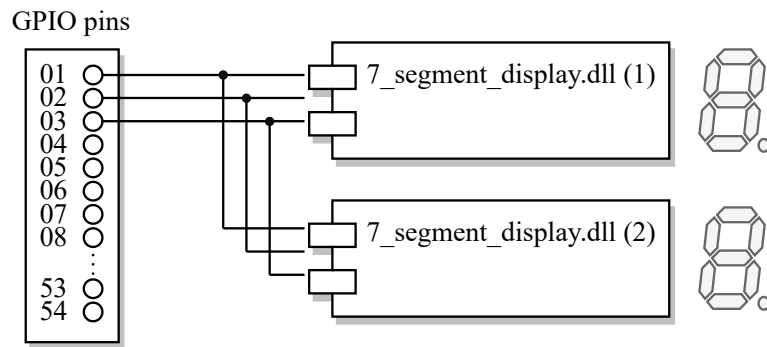


Figure 5.42: Illustration of connection of two parallel 7-segment displays

5.4.3 Examples of External Peripherals

ZeroMate is shipped with several external peripherals out of the box, most of which mirror the ones found on the DPP-01 board [17], which was designed for educational purposes within the KIV/OS class at the University of West Bohemia.

Table 5.4: List of emulated external DPP-01 peripherals

Peripheral	Additional information
button.dll	-
dip_switch.dll	-
led.dll	Features multiple color support
7_seg_display.dll	7-segment display controlled via a shift register
ssd1306_oled.dll	OLED display controlled via the I ² C protocol

Table 5.5: List of additional external peripherals

Peripheral	Additional information
serial_terminal.dll	Used for the UART communication
logic_analyzer.dll	Visualization of GPIO pins' state over time

5.4.3.1 Serial Terminal

The serial terminal serves as the counterpart in full-duplex UART communication, enabling the user to communicate externally with the firmware running in the ZeroMate emulator. In practice, this is exemplified by programs such as *PuTTY* [10], which establish communication with the development board through the host's operating system. From a design perspective, it employs the same algorithmic techniques as those described in section 5.3.3.9.

5.4.3.2 Logic Analyzer

The logic analyzer works as a read-only observer of the current state of the GPIO pins it is connected to. It graphically represents their state over time, allowing the user to visually debug individual frames of various low-level communication protocols, such as UART or I²C.

Depending on the specific use-case, the logic analyzer can either periodically sample the state of the GPIO pins²⁴ or it can sample them whenever there is a change in the state of any of the monitored pins. This feature can be especially valuable when observing synchronous communications.

5.5 Logging System

The ZeroMate project implements a custom logging system, which can be utilized both within the emulator's core and by the external peripherals. From a design perspective, the logging system component serves as a central access point, acting as a proxy to forward log messages to individual endpoint loggers. This design enables the implementation of multiple loggers for various purposes, such as logging to a file, console, or graphical user interface.

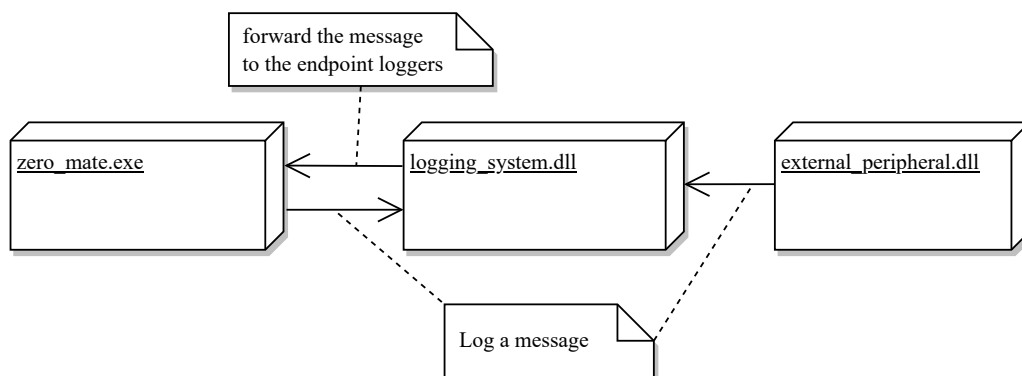


Figure 5.43: Utilization of the logging system throughout the project

²⁴The frequency is derived from the emulated CPU clock.

The logging system is compiled separately as a shared library, making it usable across all project targets. When it receives a message, it applies a uniform formatting and forwards it to all endpoint loggers.

The `ILogger` interface requires that all endpoint loggers implement the *Debug*, *Info*, *Warning*, and *Error* callback functions, which are commonly found in the majority of logging systems. Moreover, each endpoint logger can have a different logging level²⁵, allowing them to filter out messages that do not meet their specific criteria.

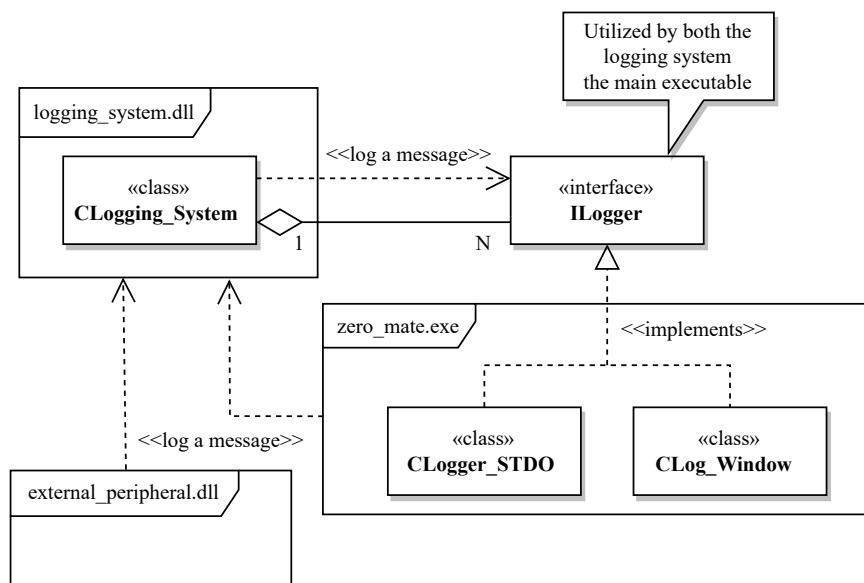


Figure 5.44: Hierarchy of endpoint loggers utilized by the logging system

5.6 User Interface

ZeroMate places a strong emphasis on the visual aspects of emulation, aiming to assist the user in debugging and troubleshooting potential bugs or issues. It serves as a frontier interface, through which the user can interact with the emulator and view the current system's state. ZeroMate consists of a set of hierarchically structured windows, each displaying information about distinct aspects of the emulator's core.

Figure 5.45 shows the architectural structure of all GUI windows, with each window being periodically rendered within each frame.

From 5.45, it can be observed that every class windows has access to the part of the emulator's core whose state is supposed to visualize. This imposes a one-

²⁵For instance, when the logging level is set to *Warning*, the logger will only accept messages classified as *Warning* or *Error*.

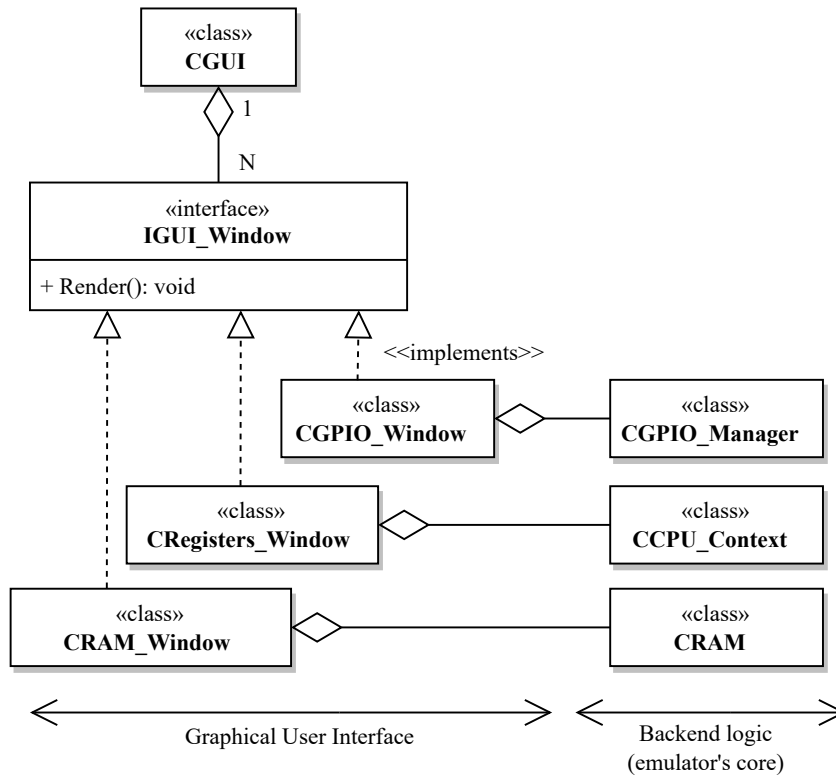


Figure 5.45: Structure of GUI windows

direction dependency, allowing the core to be potentially used with different GUI libraries in the future, should the needed arise.

In general, all windows can be categorized into three main types: *component windows*, *utility windows*, and the *primary source code window*.

The component windows are designed to display the current state of specific components, such as the CPU context, RAM, CPU registers, coprocessors, and others. Utility windows aim to enhance the user experience. This category includes windows like the logging window, the top bar menu, and the control window, which enable users to control the state of execution. Lastly, the primary source code window is arguably of utmost importance, as it presents the disassembled source code organized into different functions. It provides the user with information about the current line of execution and it allows them to set breakpoints at their desired locations.

Further design as well as implementation details regarding both the core and GUI components of the ZeroMate emulator in the documentation generated from the source code. This documentation is accessible online through [GitHub Pages](#) [18].

Development Process

6

6.1 Technologies

Testing

7

7.1 Unit Testing

7.2 Function Testing

7.3 System Testing

User Manual

8

Conclusion

9

Bibliography

1. COMMITTEE, TIS. *Tool Interface Standard (TIS) Executable and Linking Format (ELF) Specification*. Linux Foundation, 1995. Available also from: <https://refspecs.linuxfoundation.org/elf/elf.pdf>.
2. BROADCOM. *BCM2835 ARM Peripherals*. Broadcom Corporation, 2012. Available also from: <https://datasheets.raspberrypi.com/bcm2835/bcm2835-peripherals.pdf>.
3. COPLIEN, James O. *Multi-Paradigm Design for C++*. Taschen, 1998. ISBN 978-0201824674.
4. BALOGUN, Ghaniyyat Bolanle. *A Comparative Analysis of the Efficiencies of Binary and Linear Search Algorithms*. Department of Computer Science, University of Ilorin, Ilorin, Nigeria., 2020. Available also from: <https://afrjcict.net/wp-content/uploads/2020/03/Vol13No1Mar20pap3journalformatpagenumb.pdf>.
5. KANKOWSKI, Peter. *x86 Machine Code Statistics*. 2008. Available also from: https://www.strchr.com/x86_machine_code_statistics.
6. *The GNU C++ Library - Chapter 28. Demangling*. The GNU Compiler Collection, 2008. Available also from: https://gcc.gnu.org/onlinedocs/libstdc++/manual/ext_demangling.html.
7. LAMIKHOV-CENTER, Serge. *ELFIO - ELF (Executable and Linkable Format) reader and producer implemented as a header-only C++ library*. Available also from: <https://elfio.sourceforge.net>.
8. WEBER, Nico. *Demumble - A better c++filt and a better undname.exe, in one binary*. Available also from: <https://github.com/nico/demumble>.
9. *BCM2835 datasheet errata*. Embedded Linux Wiki. Available also from: https://elinux.org/BCM2835_datasheet_errata.
10. TATHAM, Simon. *PuTTY - free implementation of SSH and Telnet for Windows and Unix platforms, along with an xterm terminal emulator*. Available also from: <https://www.putty.org>.

11. TORVALDS, Linus. *Linux kernel*. Available also from: https://github.com/torvalds/linux/blob/master/drivers/char/hw_random/bcm2835-rng.c.
12. BHATTACHARJEE, Kamalika; DAS, Sukanta. *A search for good pseudo-random number generators: Survey and empirical studies*. 2022. Available also from: <https://www.sciencedirect.com/science/article/pii/S1574013722000144>.
13. *ARM Architecture Reference Manual*. ARM. Available also from: <https://documentation-service.arm.com/static/5f8dacc8f86e16515cdb865a?token=>.
14. SLOSS, Andrew; WRIGHT, Chris. *ARM and Thumb Instruction Encodings (B2 APPENDIX)*. ARM. Available also from: https://gab.wallawalla.edu/~curt.nelson/cptr380/textbook/advanced%20material/Appendix_B2.pdf.
15. *ARM1176JZF-S Technical Reference Manual*. ARM, 2009. Available also from: <https://developer.arm.com/documentation/ddi0301/h>.
16. *754-2019 - IEEE Standard for Floating-Point Arithmetic*. Institute of Electrical and Electronics Engineers, 2019. Available also from: <https://ieeexplore.ieee.org/document/8766229>.
17. ÚBL, Martin. *KIV-DPP-01 - Expansion board documentation*. University of West Bohemia, 2021. Available also from: <https://home.zcu.cz/~ublm/files/os/kiv-dpp-01-en.pdf>.
18. ŠILHAVÝ, Jakub. *ZeroMate Doxygen documentation*. 2023. Available also from: <https://silhavyj.github.io/ZeroMate>.

List of Abbreviations

RAM - Random Access Memory
ELF - Executable Linkage Format
GPU - Graphics Processing Unit
SREC - Motorola S-record (file format)
GUI - Graphical User Interface
EEPROM - Electrically Erasable Programmable Read-only Memory
CPU - Central Processing Unit
ALU - Arithmetic-Logic Unit
MAC - MAC Unit (performs multiply-accumulate operations)
MMU - Memory Management Unit
ISA - Instruction Set Architecture
MMIO - Memory-mapped Input-Output device
I/O - Input-Output
R/W - Read-Write
ABI - Application Binary Interface
RTTI - Run-Time Type Information
GPIO - General Purpose Input/Output
LED - Light-emitting diode
SD - Secure Digital
IVT - Interrupt Vector table
QA - Quality Assurance
UART - Universal Asynchronous Receiver/Transmitter
TRNG - True Random Number Generator
LCG - Linear Congruential Generator
OS - Operating System
I²C - Inter-Integrated Circuit
CPI - Cycles Per Instruction
IC - Interrupt Controller
PWM - Pulse Width Modulation
IRQ - Interrupt Request
FIQ - Fast Interrupt Request

AUX - Auxiliary
MSB - Most Significant Bit
LSB - Least Significant Bit
TX - Transmit
RX - Receive
BSC - Broadcom Serial Controller
CPSR - Current Program Status Register
SPSR - Saved Program Status Register
TLB - Translation Lookaside Buffer
TTBR - Translation Table Base Register
CP10 - Coprocessor 10
CP15 - Coprocessor 15
VFP - Vector Floating-Point
FPU - Floating-Point Unit
OLED - Organic Light-Emitting Diode
STD0 - Standard Output

List of Figures

5.1	Single SREC record (16-bit addressing)	12
5.2	Process of building an ELF file (input for the emulator) ¹	12
5.3	Primary use-cases of the ZeroMate emulator	13
5.4	Deployment diagram of the ZeroMate emulator	13
5.5	Core components of the ZeroMate emulator	14
5.6	Example of a read/write data request issued by the CPU	15
5.7	Collection of memory-mapped peripherals	16
5.8	Loading an input ELF file (kernel)	18
5.9	Internal logic of the ELF Loader component	19
5.10	Internal vs External peripherals	20
5.11	Hierarchy of internal peripherals	20
5.12	BCM2835 physical memory layout emulated by ZeroMate	21
5.13	Writing to a peripheral's register ²	22
5.14	ISystem_Clock_Listener interface	23
5.15	RAM implementation as a continuous piece of memory	24
5.16	Memory-mapped debug monitor	25
5.17	Reading random numbers from the TRNG peripheral	26
5.18	Context of the ARM timer component	28
5.19	Content of the value register of the ARM timer over time	29
5.20	Structure of the GPIO manager ³	29
5.21	Context of the interrupt controller	31
5.22	Encapsulated information about IRQ sources	32
5.23	Registers of the AUX peripheral	32
5.24	Structure of the AUX peripheral	33
5.25	UART communication with an external peripheral	33
5.26	Example of a Mini_UART data frame with 8 bits of data	34
5.27	Mini_UART state machine (transmitting 8 bits)	35
5.28	Structure of an I ² C frame	36
5.29	Internal components of the ARM1176JZF_S processor	37
5.30	Relationship between the CPU context and the CPU core	37

5.31	Use of the ISA decoder by the CPU	39
5.32	Algorithm for decoding ARM instructions	39
5.33	Hierarchy of the CPU exceptions	40
5.34	Architectural structure of the ALU	41
5.35	Utilization of the MMU when processing a RW request	42
5.36	Structure of the first-level page table	43
5.37	Execution loop of the emulated CPU	44
5.38	Component diagram of the CPU and its coprocessors	45
5.39	Coprocessor hierarchy	46
5.40	Design of the coprocessor 15 register hierarchy	47
5.41	External peripheral interface	49
5.42	Illustration of connection of two parallel 7-segment displays	51
5.43	Utilization of the logging system throughout the project	52
5.44	Hierarchy of endpoint loggers utilized by the logging system	53
5.45	Structure of GUI windows	54

List of Tables

5.1	List of emulated CP15 registers	46
5.2	List of emulated flags of the CP15 control registers	47
5.3	Information stored in <code>peripherals.json</code>	50
5.4	List of emulated external DPP-01 peripherals	51
5.5	List of additional external peripherals	51

List of Listings

5.1	System bus interface for I/O operations	16
5.2	Enabling unaligned access in CP15	17
5.3	Example of symbol demangling	18
5.4	Demonstration of the use of the debug monitor	25
5.5	SW emulation of a HW latch register	30
5.6	Retrieving a CPU register	38
5.7	Interface of the ISA decoder	38
5.8	Conversion between <code>uint32_t</code> and <code>float</code>	48

Attachments

10

101011000011100101100001
101011000110001100001



11010011101101001
011000011010101
111000101011101