



MiraiPanel

Control. Sense. One device.

The universal room controller for your home automation. A vivid 5.5" color LCD, eight interchangeable sensor keys and a full sensor suite — connected via LAN and MQTT.

5.5" LCD


Display

8

Keys

LAN · Wi-Fi

Link

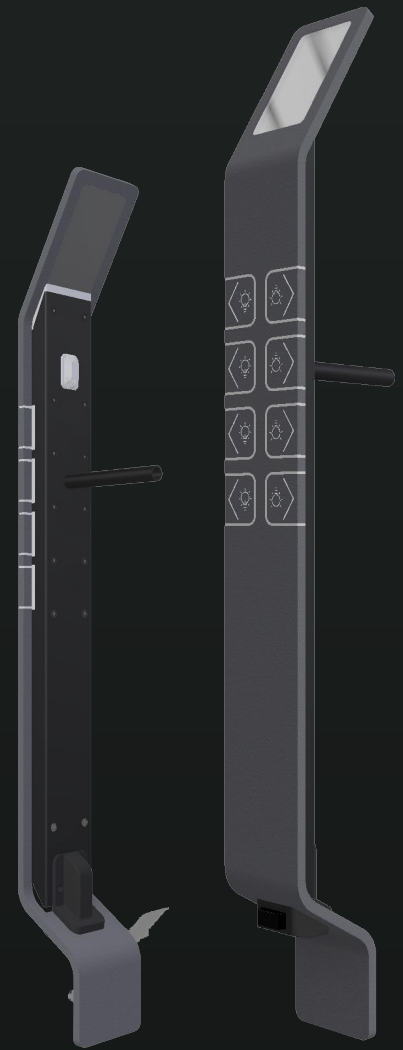

HIGHLIGHTS

5.5" color LCD

Crisp full-color display for climate, scenes and notifications.

8 sensor keys

Individually laser-inscribed and interchangeable per room.

Full sensor suite

Temperature, humidity, motion, ambient light and microphone-based presence detection.

Open integration

Open MQTT interface — LoxBerry plugin for Loxone, works with Home Assistant, ioBroker & more.

Mounting

Free-standing in front of a wall, or retrofitted on the existing socket of a light switch. Integrated, invisible cable routing.

Materials

Anodized aluminum, stainless steel, 3D-printed plastic and glass — built to feel as good as it works.



MiraiPanel

www.miraipanel.example · hello@miraipanel.example

© Sascha Ludwig 2026



DISPLAY & INTERACTION

Display	5.5" color LCD, touch, 1280 × 720 px
Keys	8 capacitive sensor keys, adjustable sensitivity, individually laser-inscribed & interchangeable
Proximity	ToF proximity sensor wakes the display on approach
Feedback	Configurable key tones for display and sensor keys
UI	Light / dark theme, selectable accent colors

SENSORS

Air quality	Bosch BME690: temperature, humidity, pressure, VOC / gas
Motion	2 PIR sensors, fully configurable
Presence	Microphone with adjustable thresholds
Light	Ambient light sensor

ORIENTATION LIGHT

Color	White, software-controlled
Signaling	Switches to red for error and signaling states

CONNECTIVITY & INTEGRATION

Network	LAN 10/100 (no PoE), switchable to Wi-Fi
Protocol	MQTT — open interface for any MQTT environment
Loxone	LoxBerry plugin for straightforward integration into Loxone systems
Also works with	Home Assistant, ioBroker and any MQTT broker

POWER

Supply	External 10–30 V DC, 24 V nominal
Consumption	approx. 1.8 W with active display
Sleep mode	Activatable, with automatic wake for current sensor values; sleep duration configurable

CONFIGURATION & UPDATES

Setup	Fully configurable via web interface
Updates	Firmware updatable

HOUSING & MOUNTING

Mounting	Free-standing or wall-mounted; retrofit on existing switch socket
Materials	Anodized aluminum, stainless steel, 3D-printed plastic, glass
Dimensions	tbd
Weight	tbd

