

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – TE Connectivity Ltd. ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED PER ECR-20-013621	24SEP2020	R.M	S.H


SPECIFICATION:


1. CURRENT RATING: 3A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
   OVERALL MATING FORCE AFTER DURABILITY: 0.60 KGF Min.

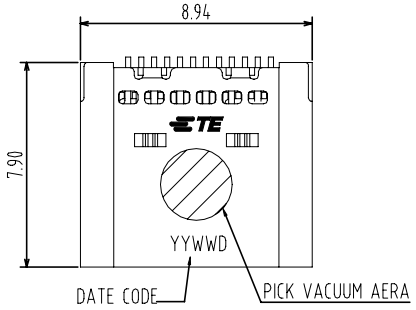


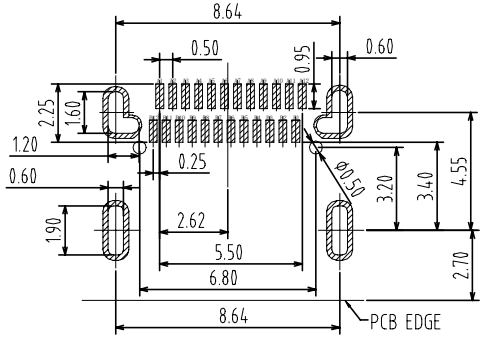

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

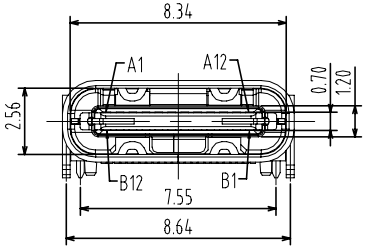




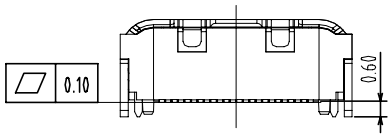

30U''	2345986-3
15U''	2345986-2
G/F	2345986-1
GOLD PLATING THICKNESS	TEPN

A1	GND	B12	GND
A2	TX1+	B11	RX1+
A3	TX1-	B10	RX1-
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	RX2-	B3	TX2-
A11	RX2+	B2	TX2+
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

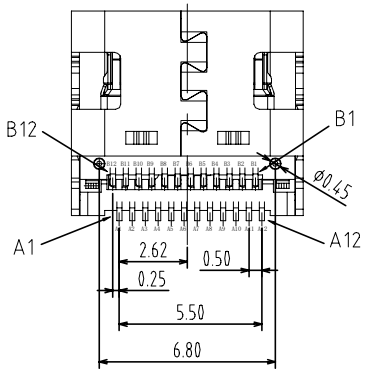

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
6	SHELL	STAINLESS STEEL	NI Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	CLIP HOOK	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	Au PLATING /NI Plated	1SET
2	CONTACT	COPPER ALLOY	Au PLATING /NI Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± 0.35
2 PLC	± 0.25
3 PLC	± 0.15
4 PLC	± –
ANGLES	±3°

MATERIAL: –

FINISH: –

DWN	R.ZHANG 30OCT2018
CHK	R.MA 30OCT2018
APVD	S.LI 30OCT2018
PRODUCT SPEC	–
APPLICATION SPEC	–
WEIGHT	–

TE Connectivity


NAME: USB TYPE C 3.1 CONN. WITH 1.63 OFFSET TOP MOUNT DUAL ROW SMT TYPE


SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2345986	–


CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 2 | REV B


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – TE Connectivity Ltd. ALL RIGHTS RESERVED.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	–	–

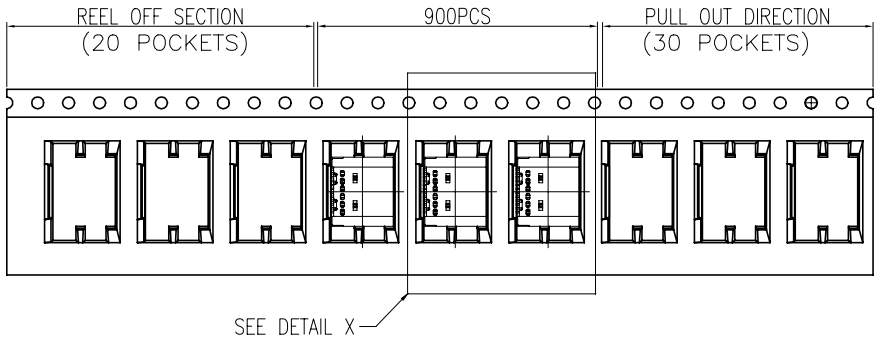


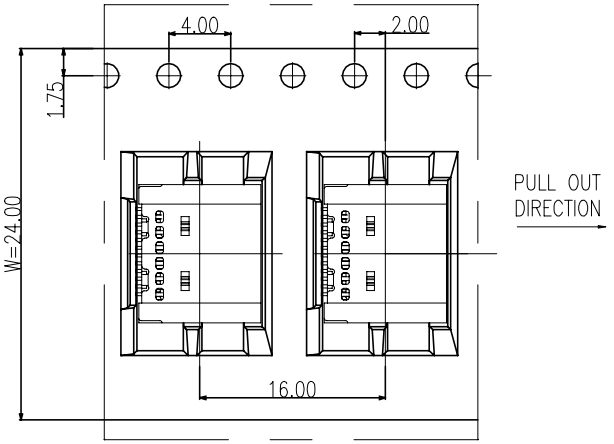

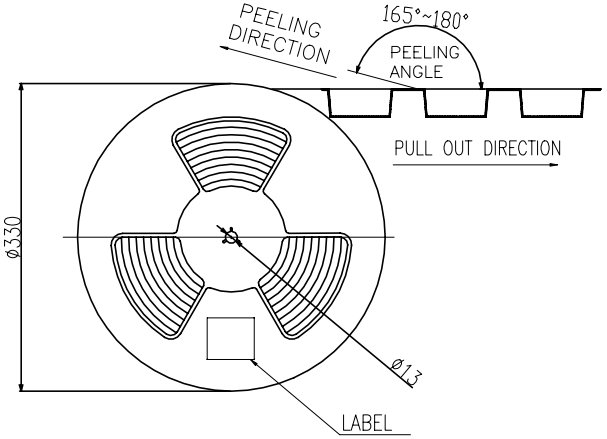



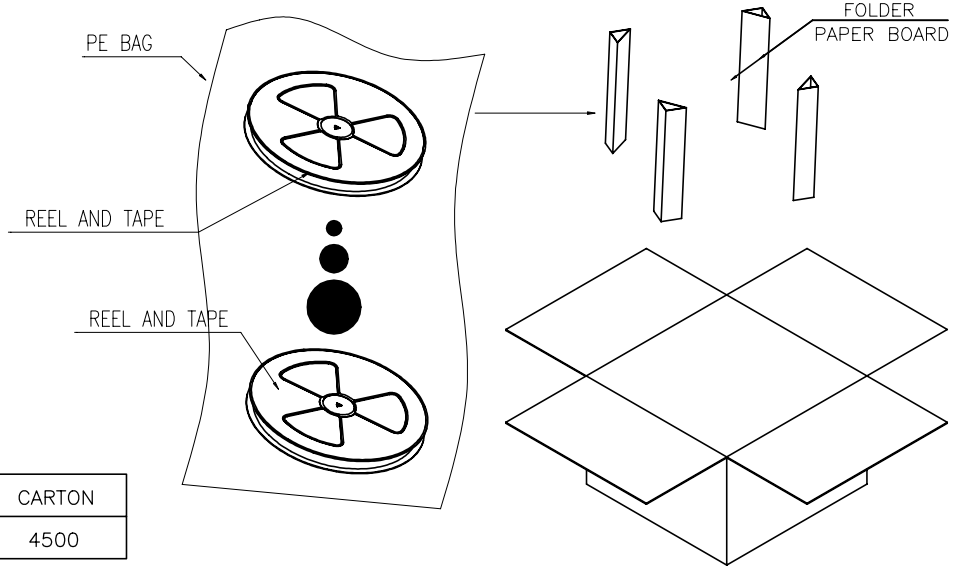

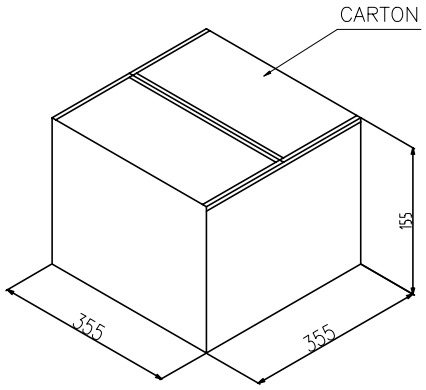

	REEL	CARTON
CONNECTOR (PCS)	900	4500

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± 0.35
2 PLC	± 0.25
3 PLC	± 0.15
4 PLC	± –
ANGLES	±3°

MATERIAL: –

FINISH: –

DWN	R.ZHANG	30OCT2018
CHK	R.MA	30OCT2018
APVD	S.LI	30OCT2018
PRODUCT SPEC	–	
APPLICATION SPEC	–	
WEIGHT	–	

TE Connectivity

NAME: USB TYPE C 3.1 CONN. WITH 1.63 OFFSET TOP MOUNT DUAL ROW SMT TYPE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2345986	–

CUSTOMER DRAWING | SCALE 1:1 | SHEET 2 OF 2 | REV B