


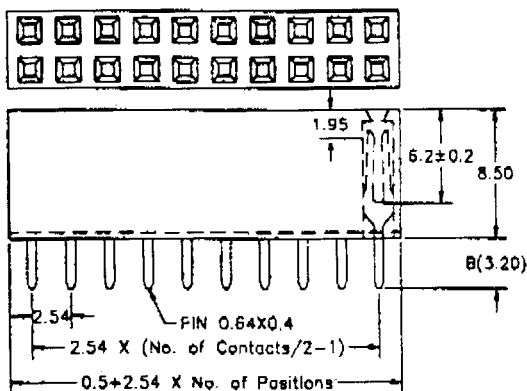


254FD



Recommended P.C.Board
Hole Layout





254FB



254FE

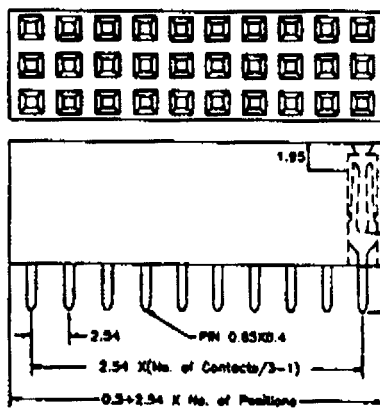

254FC

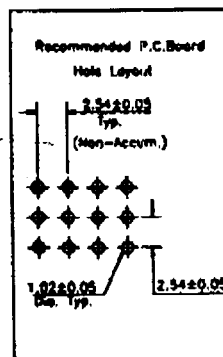

SPECIFICATIONS

Current rating: 3 Amps

Insulator resistance: 5000 megohms min.

Contact resistance: 20 m ohm Max.

Dielectric withstanding: AC 500 V

Operating temperature: -40° — +105°C

Contact material: phosphor bronze

Insulator material: polyester, UL 94V-0

©Standard: P.B.T

Finish: tin, gold or duplex plated