
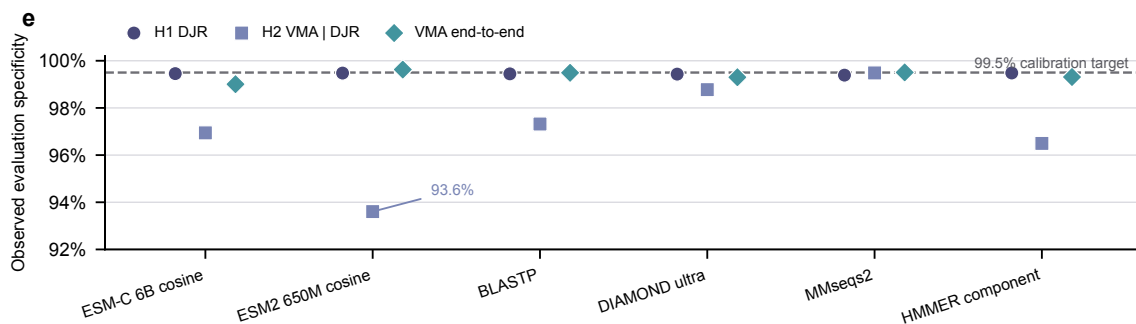
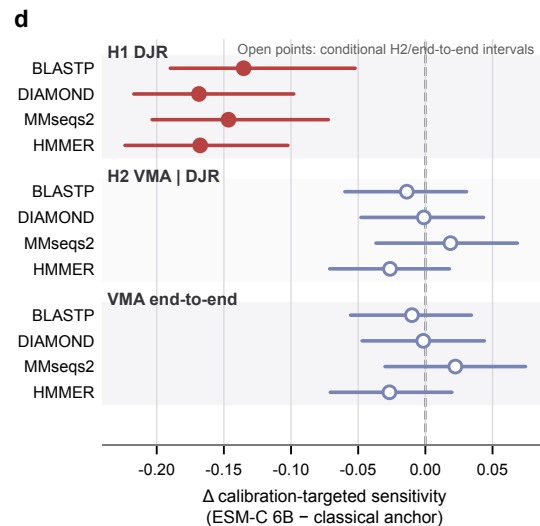
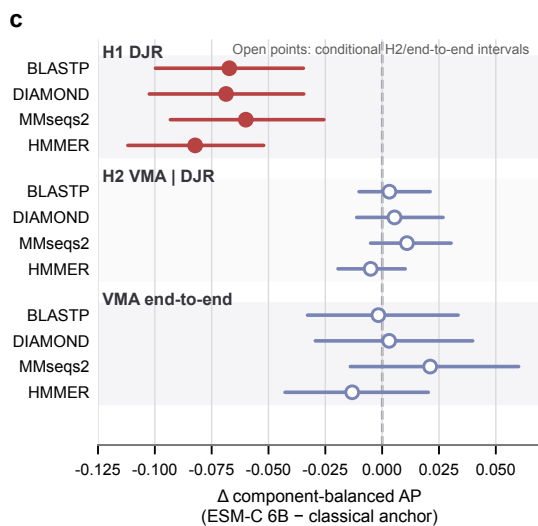
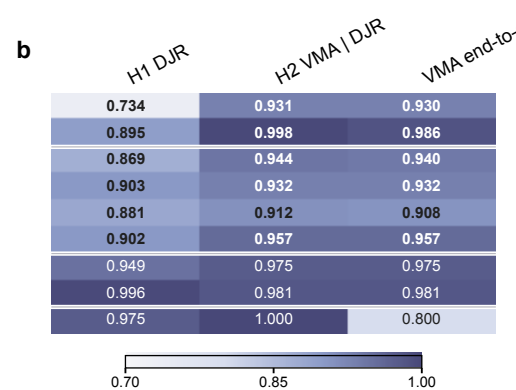


Component-balanced AP

Calibration-targeted sensitivity

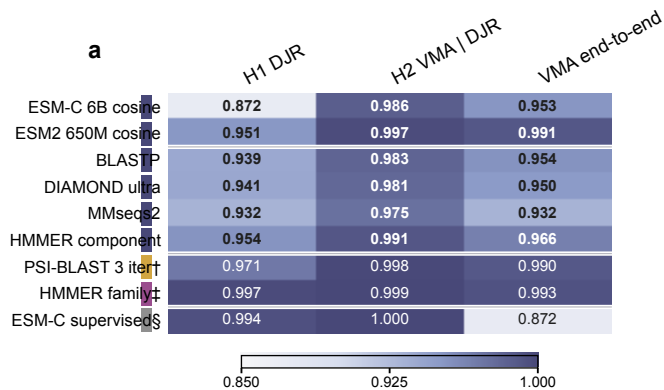

Thresholds target 99.5% specificity on disjoint calibration folds; evaluation specificity is measured in e.
Internal Train-only 3/1/1 component cross-fitting; H2/end-to-end intervals are conditional and resolution-limited.