
EEPROM Update Guide

- 1, Tool: USB convert RS232 demo.
- 2. Circuit connetion:

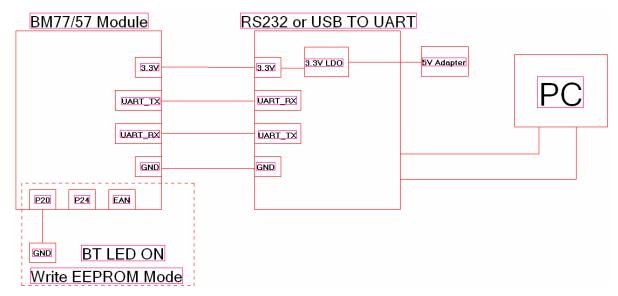


Write EEPROM mode, BT-LED on!

3、 At pc,Open "E2PROM_tool_100913.exe":

🔀 E2PROM tool Sep 13 2010, 17:	54:41		
Select E2PROM Table File	Interface • UART • USB	COM PORT COM Port: Baudrate:	COM26 ▼ 115200 ▼
E2PROM File:			
E2PROM Dump			
Back Default (512bytes) Back Default (1024bytes)			
Change Name ISSC HS		(address=	0х000Ъ)
Read E2PROM : 0x 0000 Len:	0x 01 Data	a: 0×	
Write E2PROM : 0x 0000 Len:	0x 01 Date	a: 0x	
Read Memory : 0x 5E00 Len:	0x 01 Data	a: 0x	
Write Memory : 0x 5E00 Len:	0x 01 Date	x: 0x	


Select " COM Port ".

4. Select EEPROM Firmware:

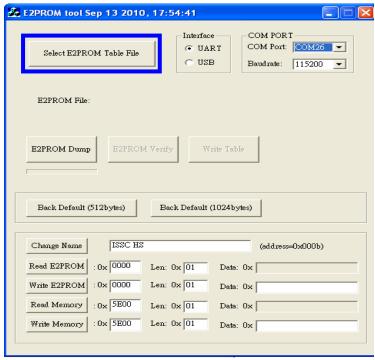


" Select E2PROM Table File " Select EEPROM Firmware

5、Write E2PROM:

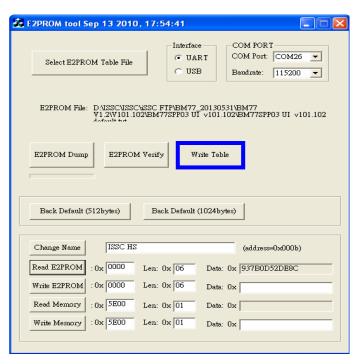

Apply "Write Teble"

6. Verify"E2PEOM date":

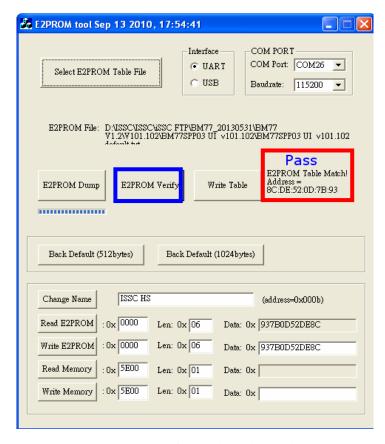

In the red square frame, Show the result.

END