



1			2			3			4		
版本号 修订日期 修订记录											
V1.0.0.02025-11-13初始版本。											
V1.0.1.02025-11-19负压电机控制信号接下拉电阻，续流二极管改为SS54。											
V1.0.2.02025-11-25编码器接口添加两个信号引脚，可用于控制STC-FOC驱动											

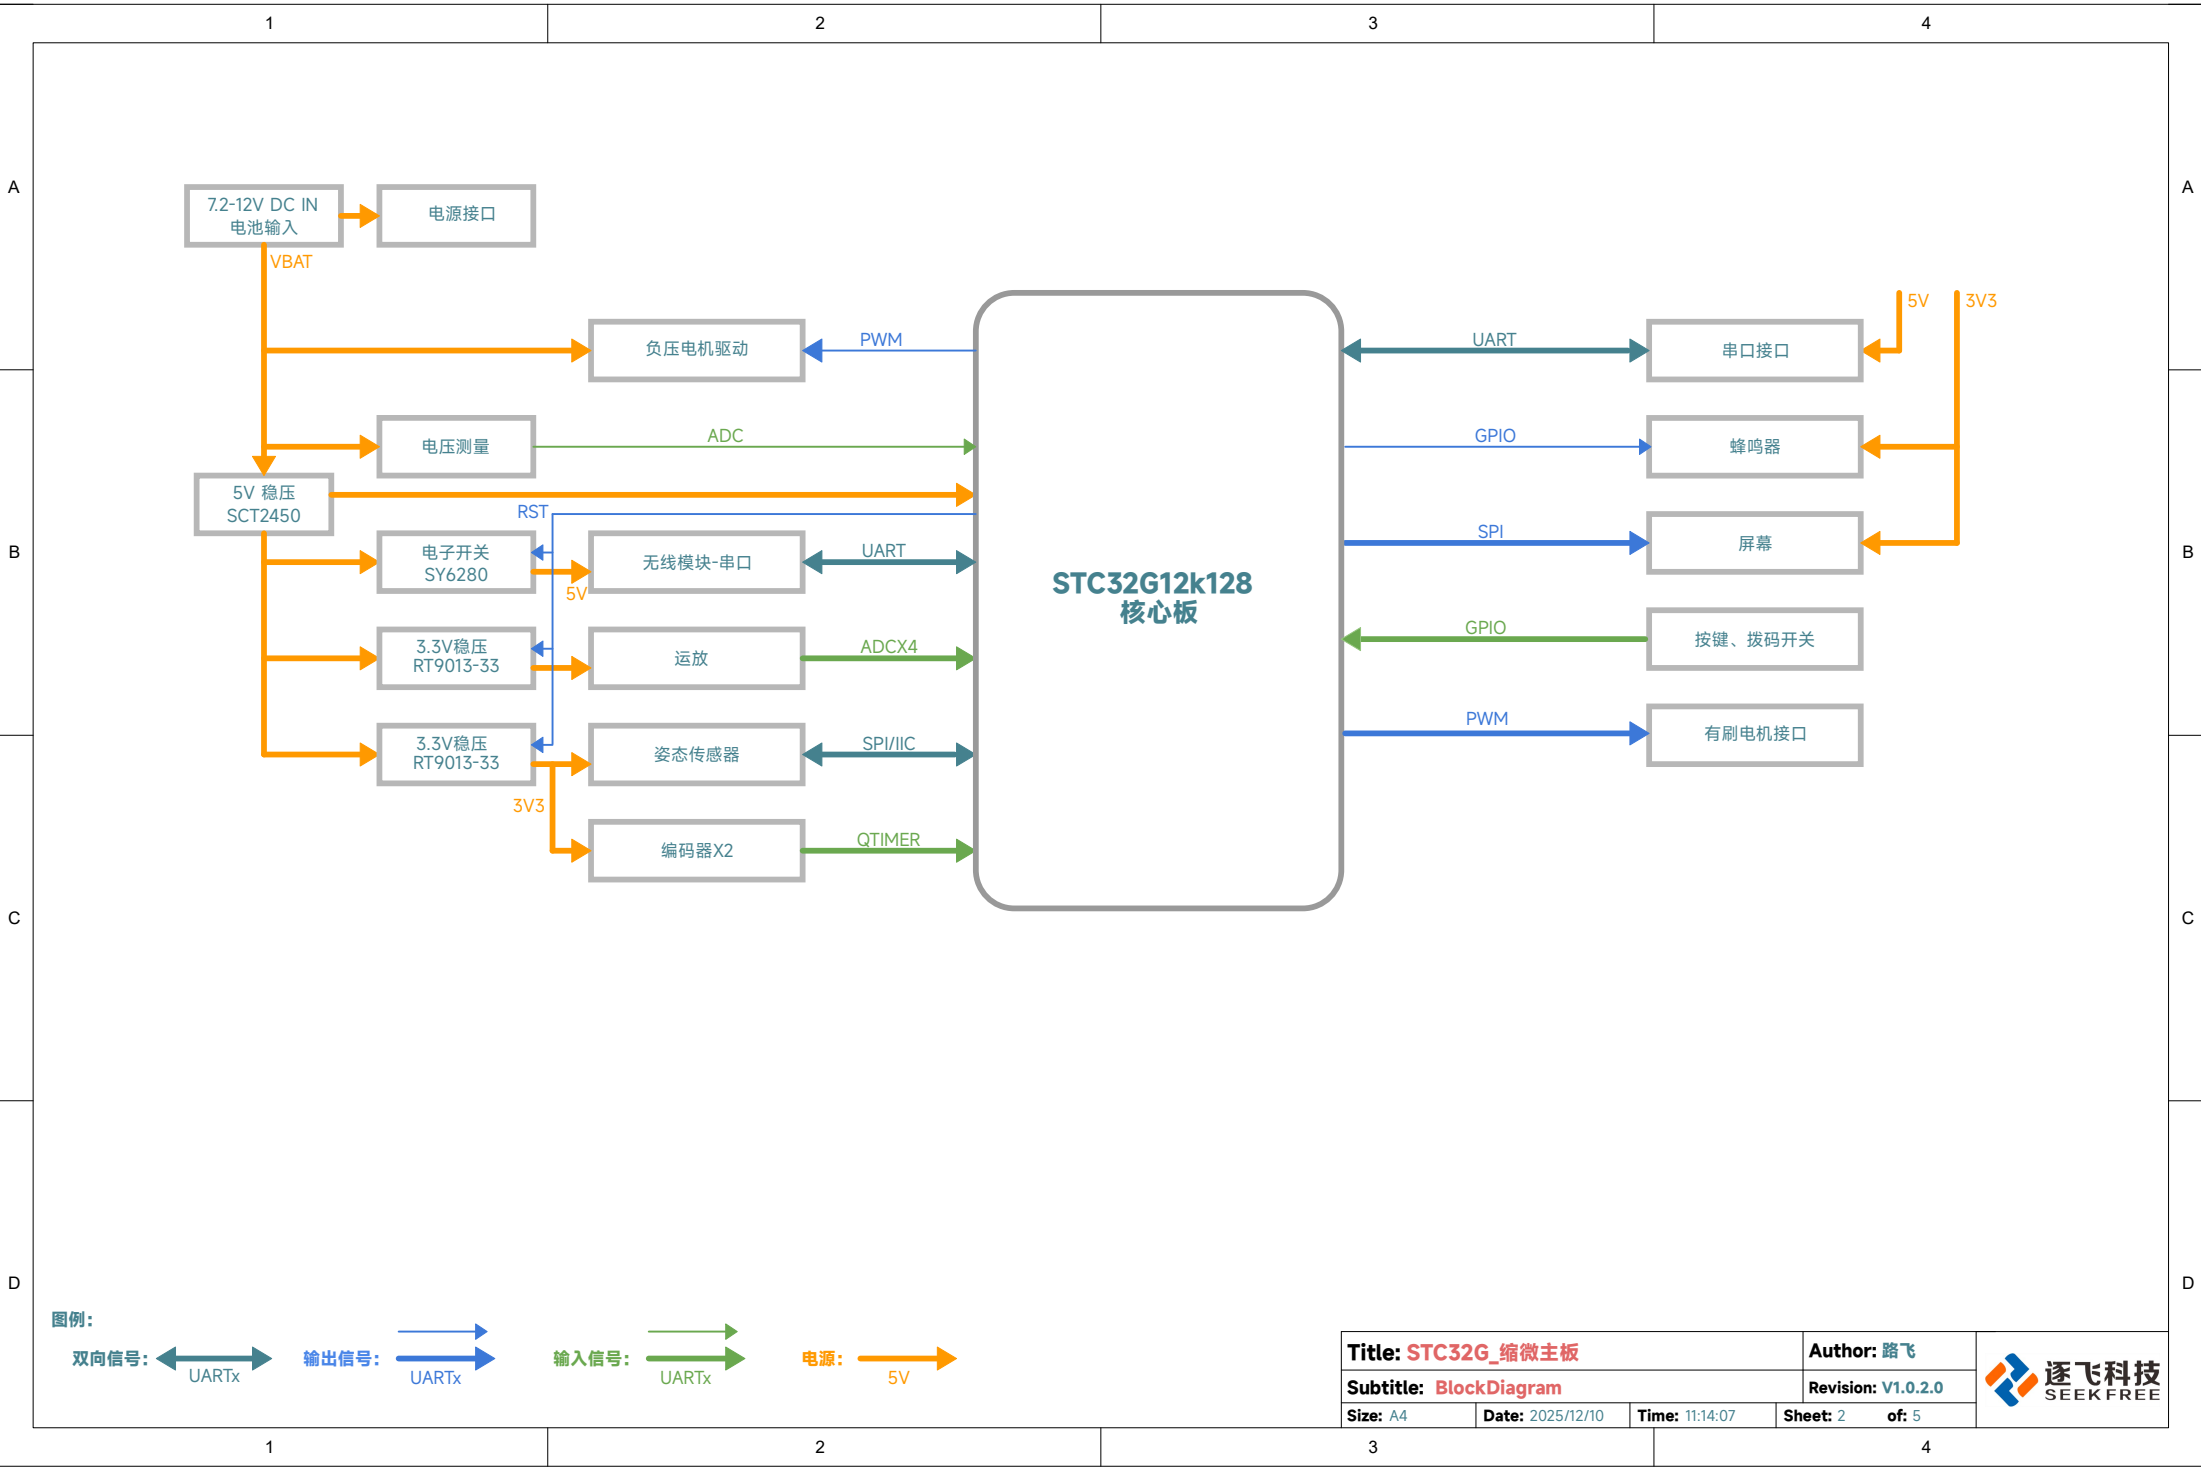


外设	功能	对应引脚
编码器	LSB	3.4
	DIR	3.5
	PWMOUT	2.4
	DIROUT	5.0
运放	LSB	0.4
	DIR	5.3
	PWMOUT	2.6
	DIROUT	5.1
负压电机	ADC	0.0
	ADC	0.1
	ADC	0.5
	ADC	0.6
串口	PWM	3.3
	SCK	2.5
	MOSI	2.3
	RST	2.0
OLED TFT	DC	2.1
	CS	2.2
	BL	2.7

外设	功能	对应引脚
姿态传感器	SCK	4.0
	MOSI	4.1
	MISO	4.2
	CS	4.3
无线模块	Tx	0.3
	Rx	0.2
	RTS	0.7
	CMD	4.5
电机	PWM	6.0
	PWM	6.2
	PWM	6.4
	PWM	6.6
拨码开关	IO	7.5
	IO	7.6
	IO	7.0
	IO	7.1
按键	IO	7.2
	IO	7.3
	IO	7.3
	IO	7.3
蜂鸣器	IO	6.7
电池电压	ADC	1.5

引脚表

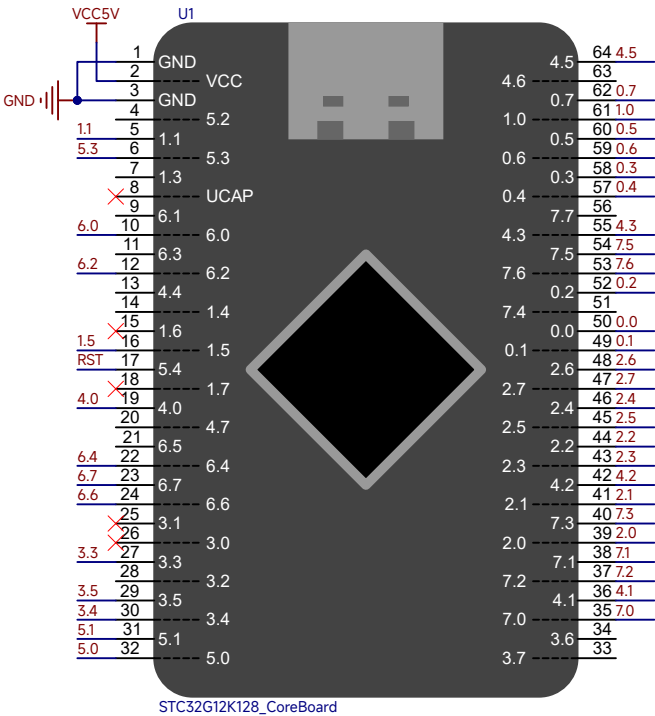


电源接口/开关

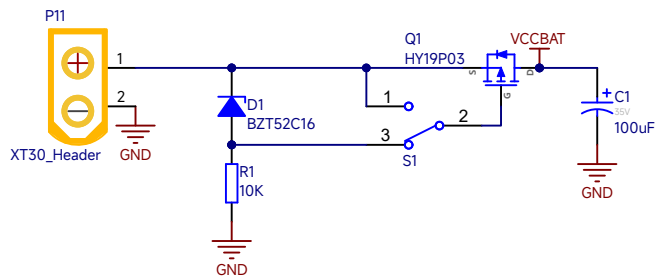


此电路为解决开关打火损耗而设计，可以用普通开关代替


3V3

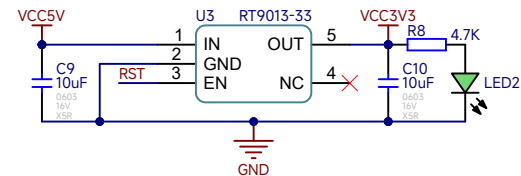


电机电源接口




3V3

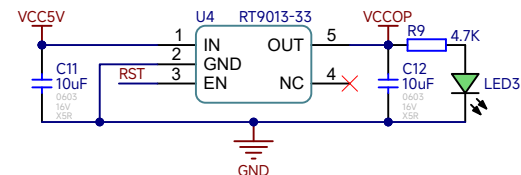

5V电源

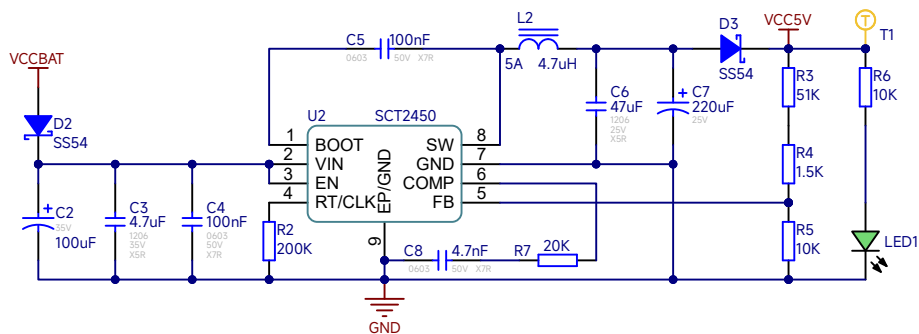

5V外设电源控制

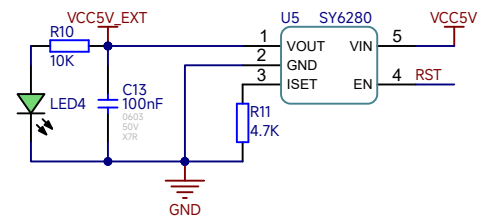

Title: STC32G_缩微主板

Author: 路飞

Subtitle: PWR

Revision: V1.0.2.0

Size: A4

Date: 2025/12/10


Time: 11:14:07

Sheet: 4


of: 5



电磁运放模块接口

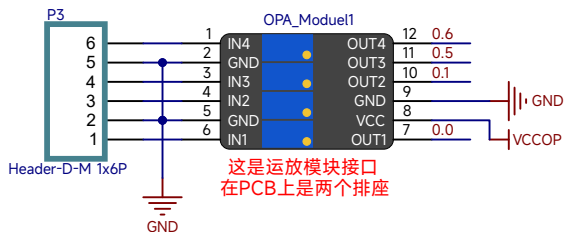


编码器接口

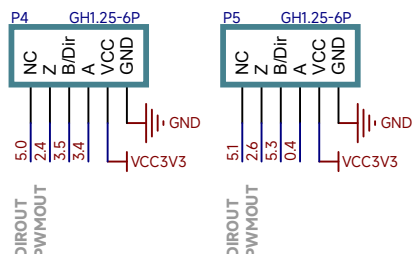


添加两个信号引脚，可用于控制STC-FOC驱动


屏幕接口




电机信号接口




负压电机接口

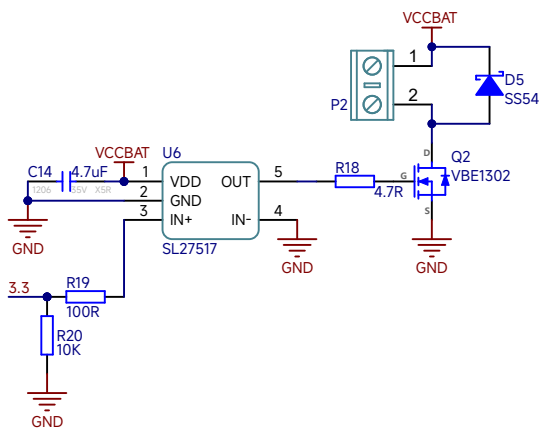


串口接口




蜂鸣器




拨码开关/按键




姿态传感器接口




无线模块-串口

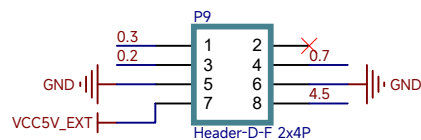

电压测量



安装孔



Title: STC32G_缩微主板

Author: 路飞

Subtitle: Device

Revision: V1.0.2.0

Size: A4

Date: 2025/12/10

Time: 11:14:07

Sheet: 5

of: 5

