ROB - Motors lab

Adam Fabo

Brno University of Technology, Faculty of Information Technology
Božetěchova 1/2. 612 66 Brno - Královo Pole
xfaboa00@fit.vutbr.cz

December 10, 2022

Todays lab will be focused on motors.

What are motors used for

Motors are electrical actuators that perform mechanical movement.

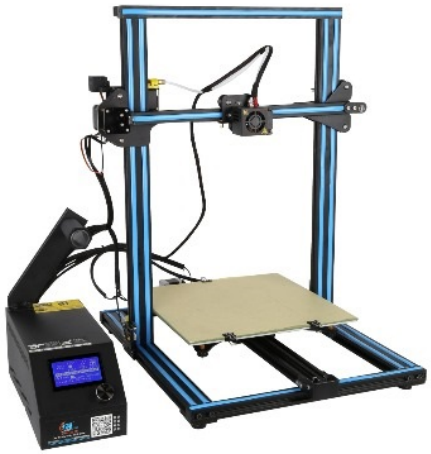

Types of motors used in this laboratory

Types of motors used in this laboratory:

- Servo motor
- Stepper motor
- DC motor

Servo motor

Used for precise control of angular position.

Servo - What it is used for

Servo motors can be used in robotic arms or as a steering in RC cars.

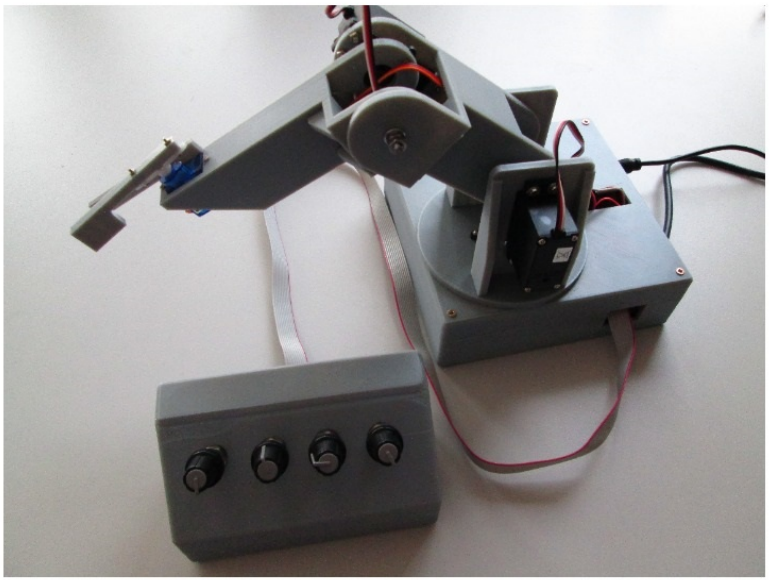

Servo motor - working principle

Working principle of a servo motor:

- Contains small DC motor which performs the movement
- At output shaft is small potentiometer, which value is fed to the controlling circuit
- Controlling circuit, based on the feedback from potentiometer, controls the DC motor
- Controlling circuit is given PWM by user to control output angle

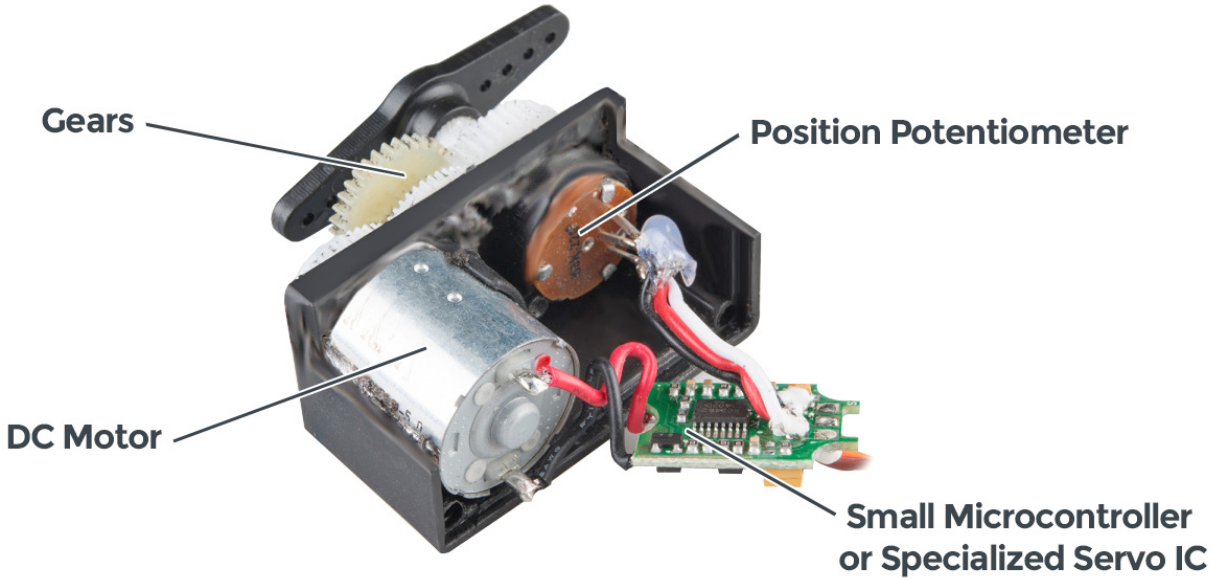

Diagram of Servo control using PWM

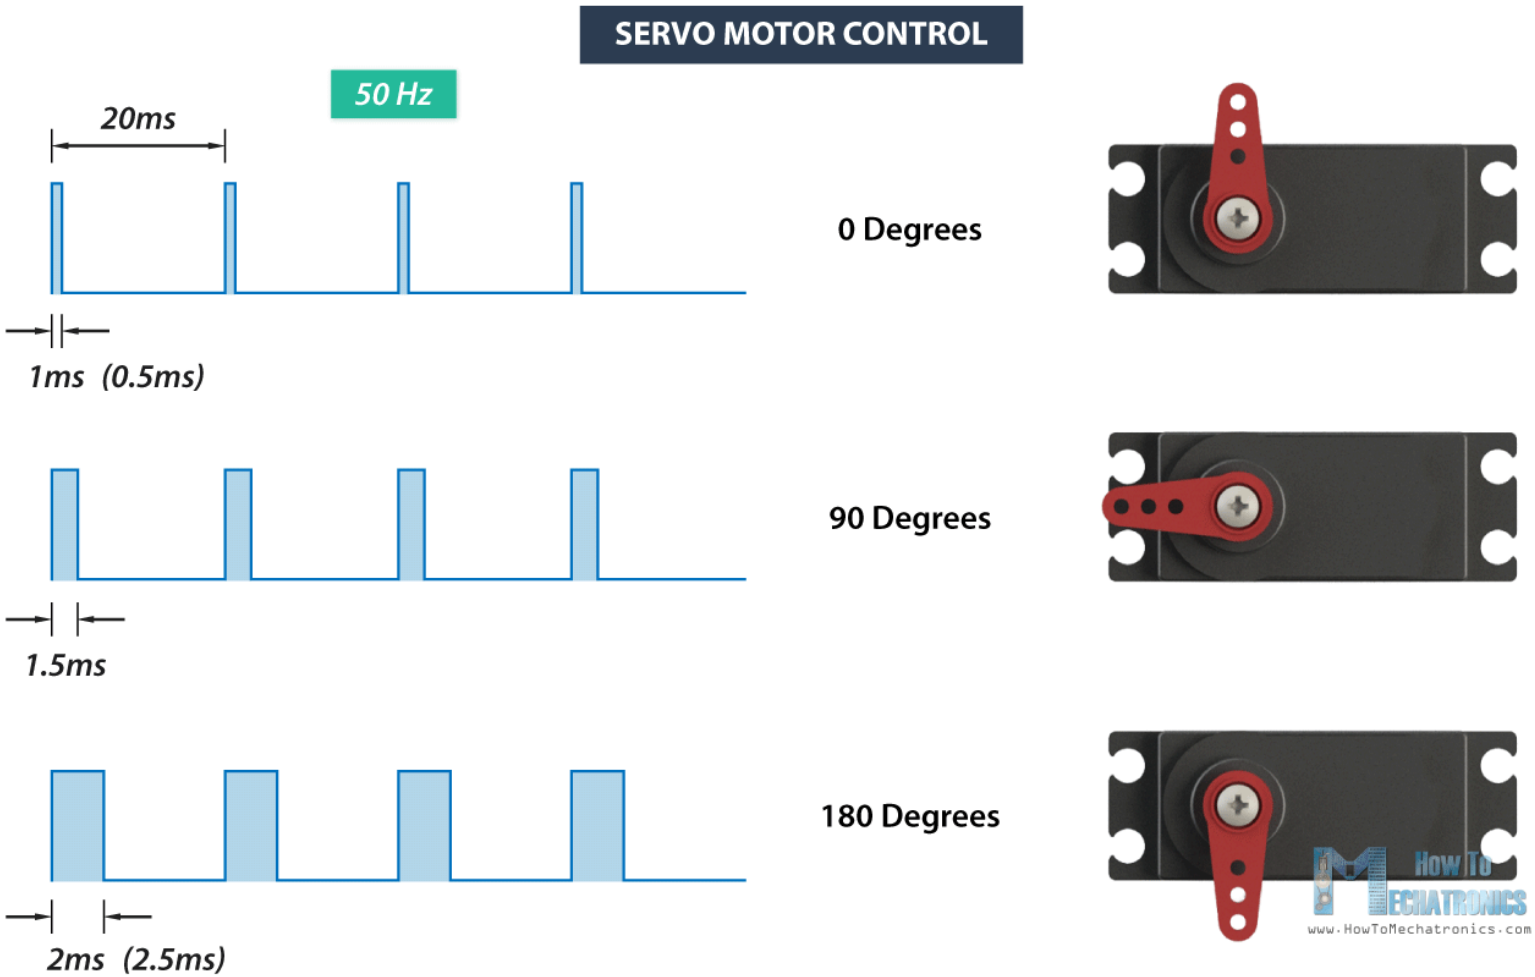

- Operating voltage: 5 Volts
- Range: 0 - 180 degrees
- Has 3 Pins - GND, VCC, PWM/Signal

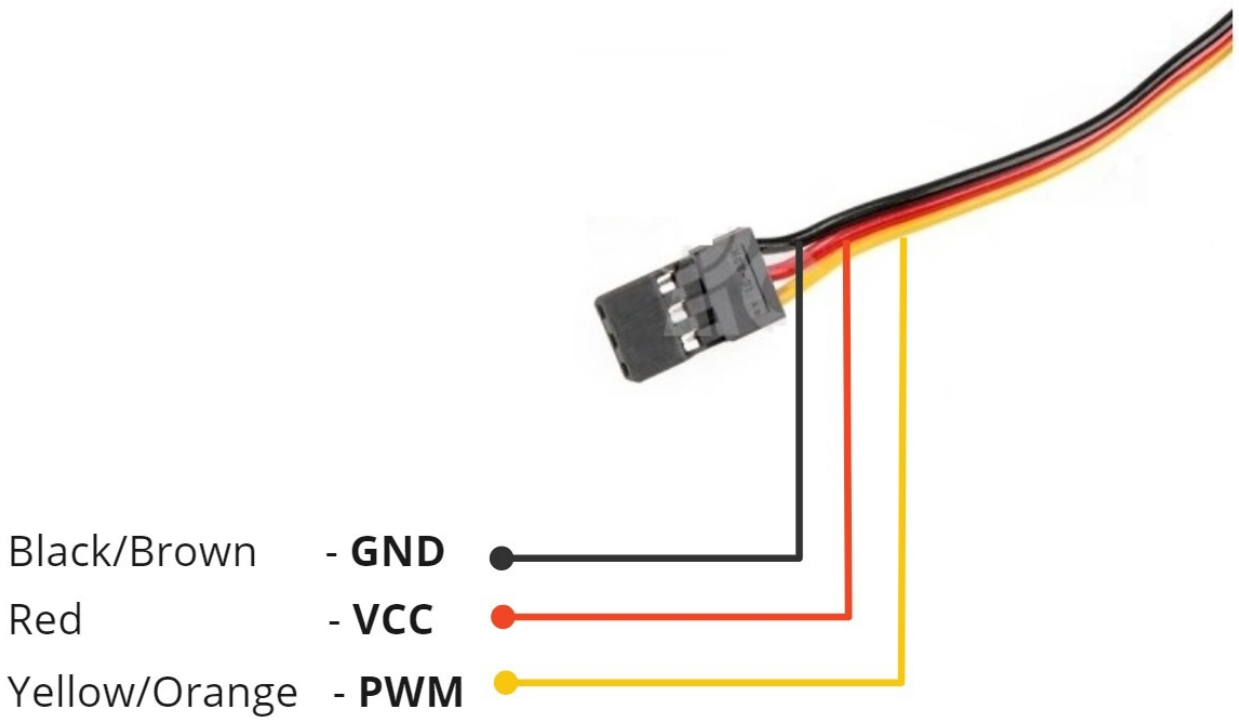

Servo motor - Scheme

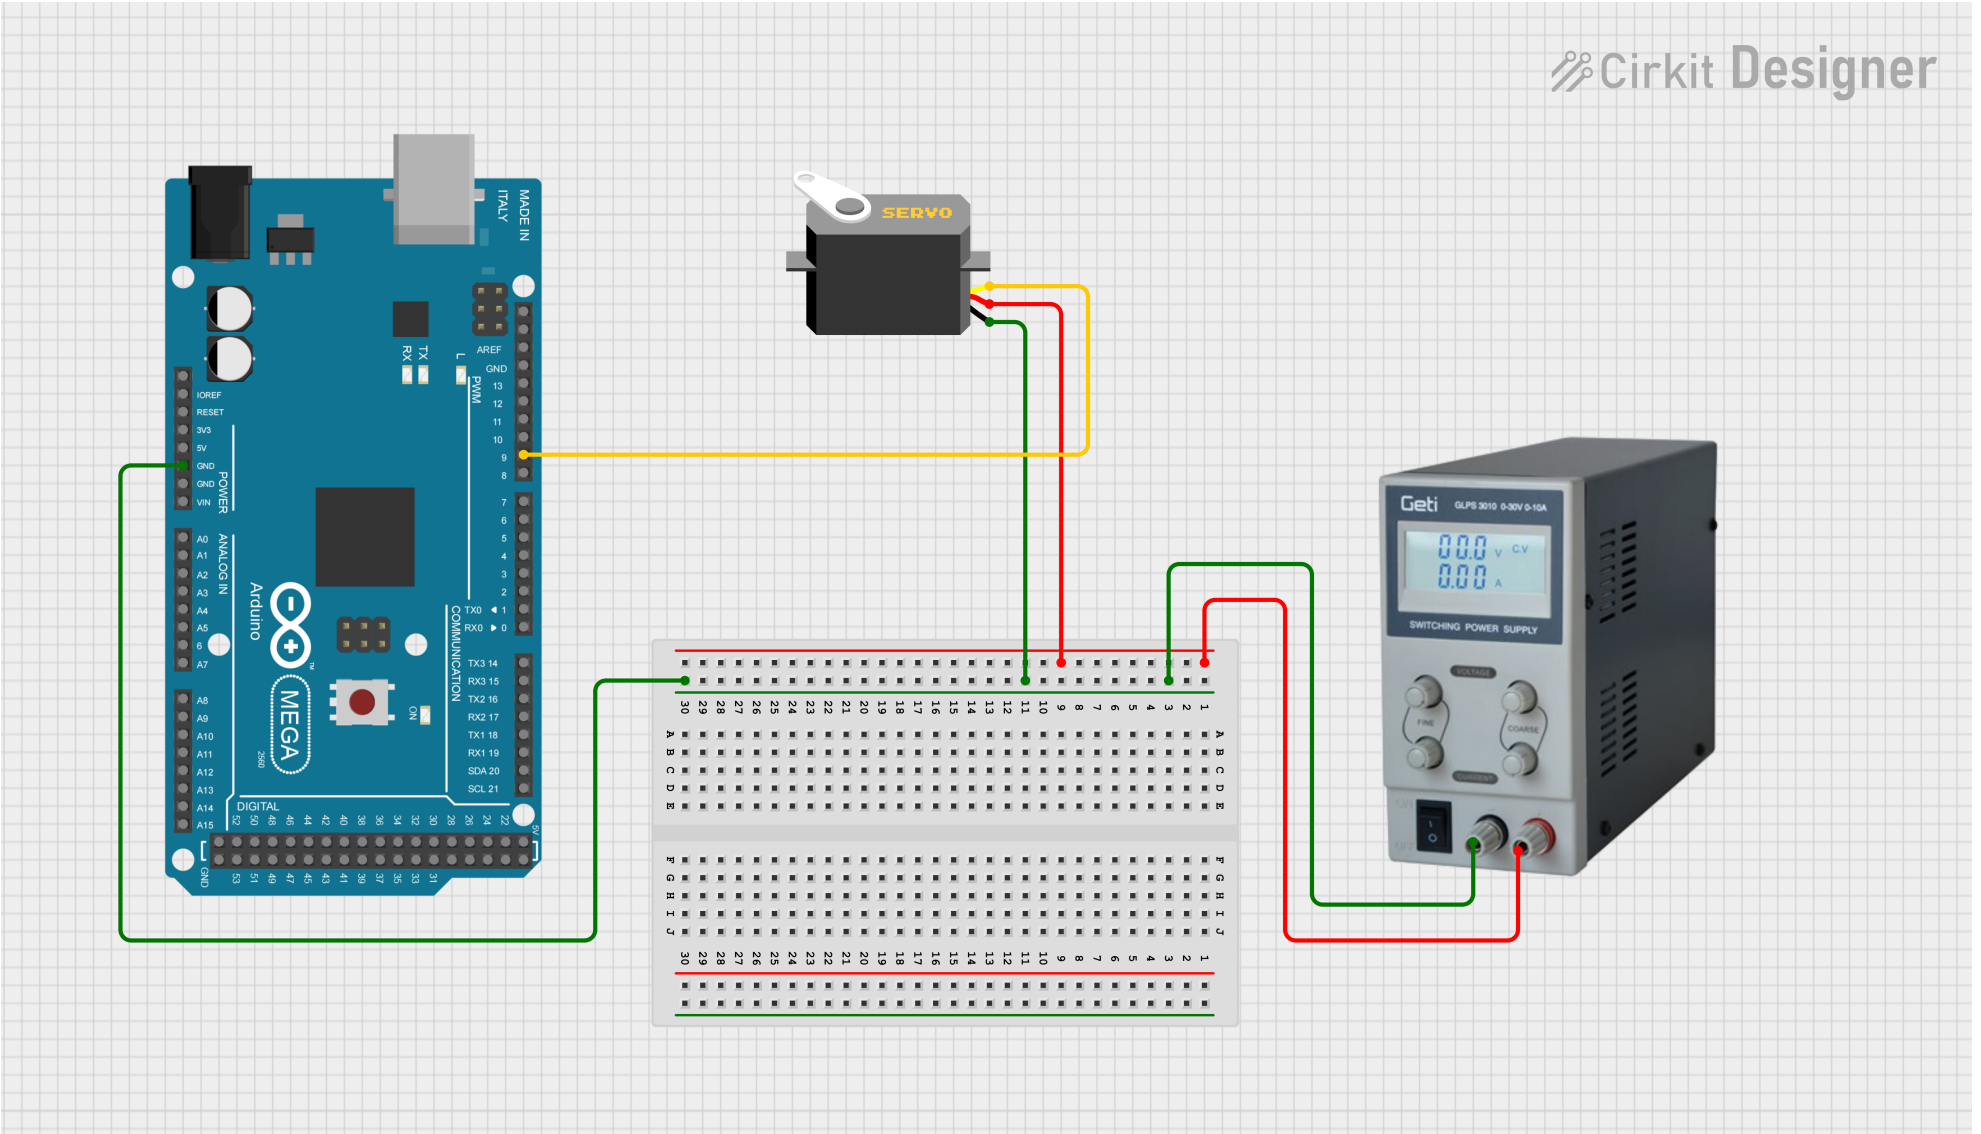

There are 2 ways of controlling servo using Arduino:

- Writing custom PWM implementation
  - Great for learning
  - Might use active waiting (not so great)
  - Prone to mistakes
- Using library <Servo.h>
  - Higher level of abstraction (classes)
  - Implementation is all set
  - Need to read documentation

Functions for custom PWM:

```
digitalWrite(pin, HIGH/LOW);   // Set pin to HIGH or LOW level
delayMicroseconds(x);          // Wait for x Microseconds
```

Methods from Servo.h library:

```
#include <Servo.h>       // Import built-in library

Servo myservo;           // Create Servo object to control a servo
myservo.attach(pin);     // Attaches the servo on given pin to the servo object

myservo.write(angle);    // Set angle to servo
```

Write your own implementation of PWM that controls servo.

- Open file Servo_custom_PWM.ino
- Take a look at scheme Servo_scheme.png and create circuit as it shown at the image
- Follow the instructions and implement servo control
- Upload the code
- Test your implementation by uploading your code and observing servo movement

Write servo controller using <Servo.h> library.

- Open file Servo_library.ino
- Reuse scheme from previous exercise
- Follow the instructions and implement servo control
- Upload the code
- Test your implementation by uploading your code and observing servo movement

Used for precise control of angular position.

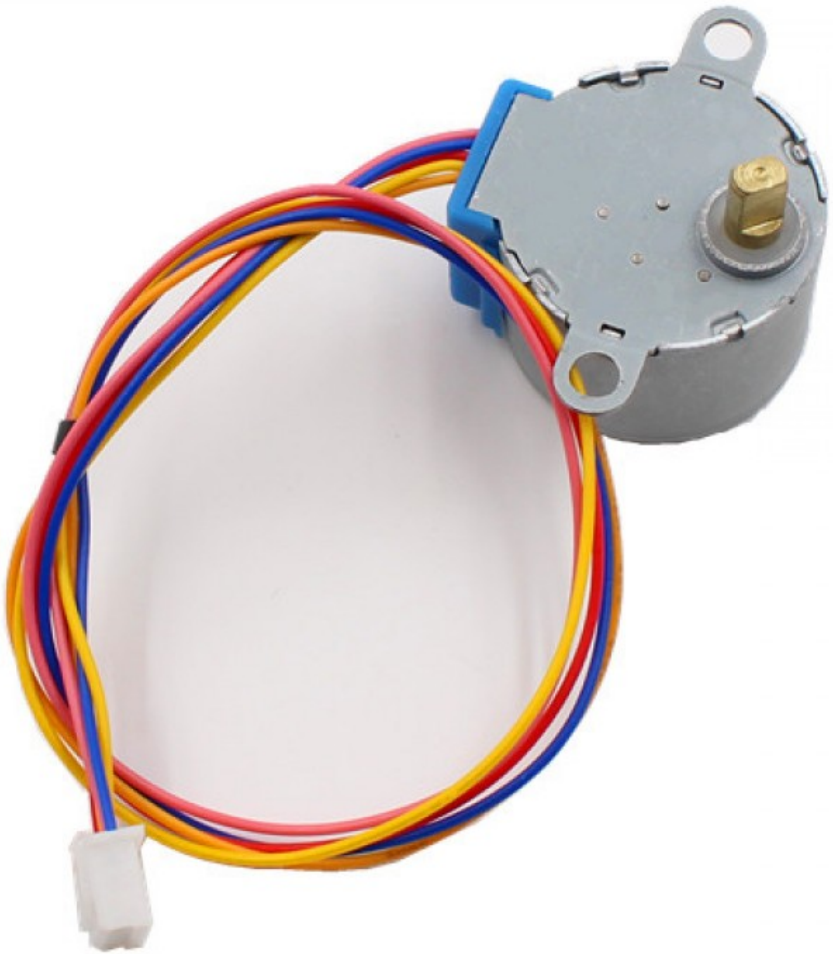

Stepper - What it is used for

Stepper motors can be found in machines like 3D printers or CNC milling machines

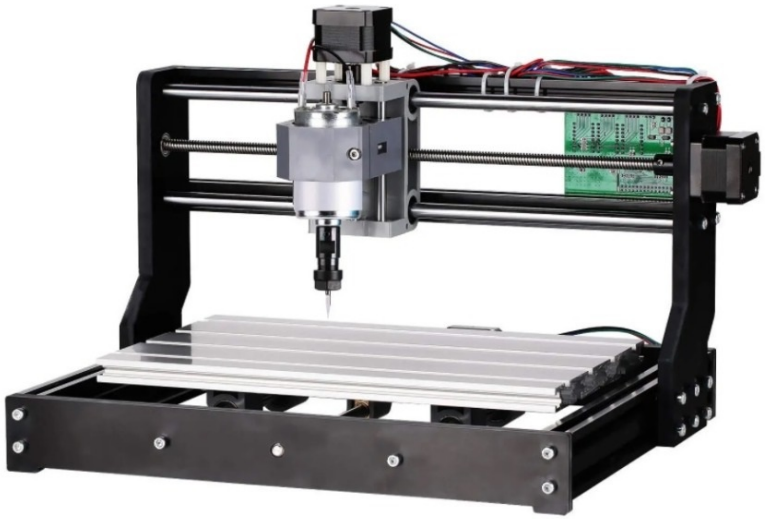

Stepper motor - woking principle

Basic concept goes as follows:

- Rotor is magnet that has south and north pole
- Stator consists of 4 coils that can be magnetized separately, one by one
- As those coils are magnetized in correct order, it "drags" rotor in circular motion

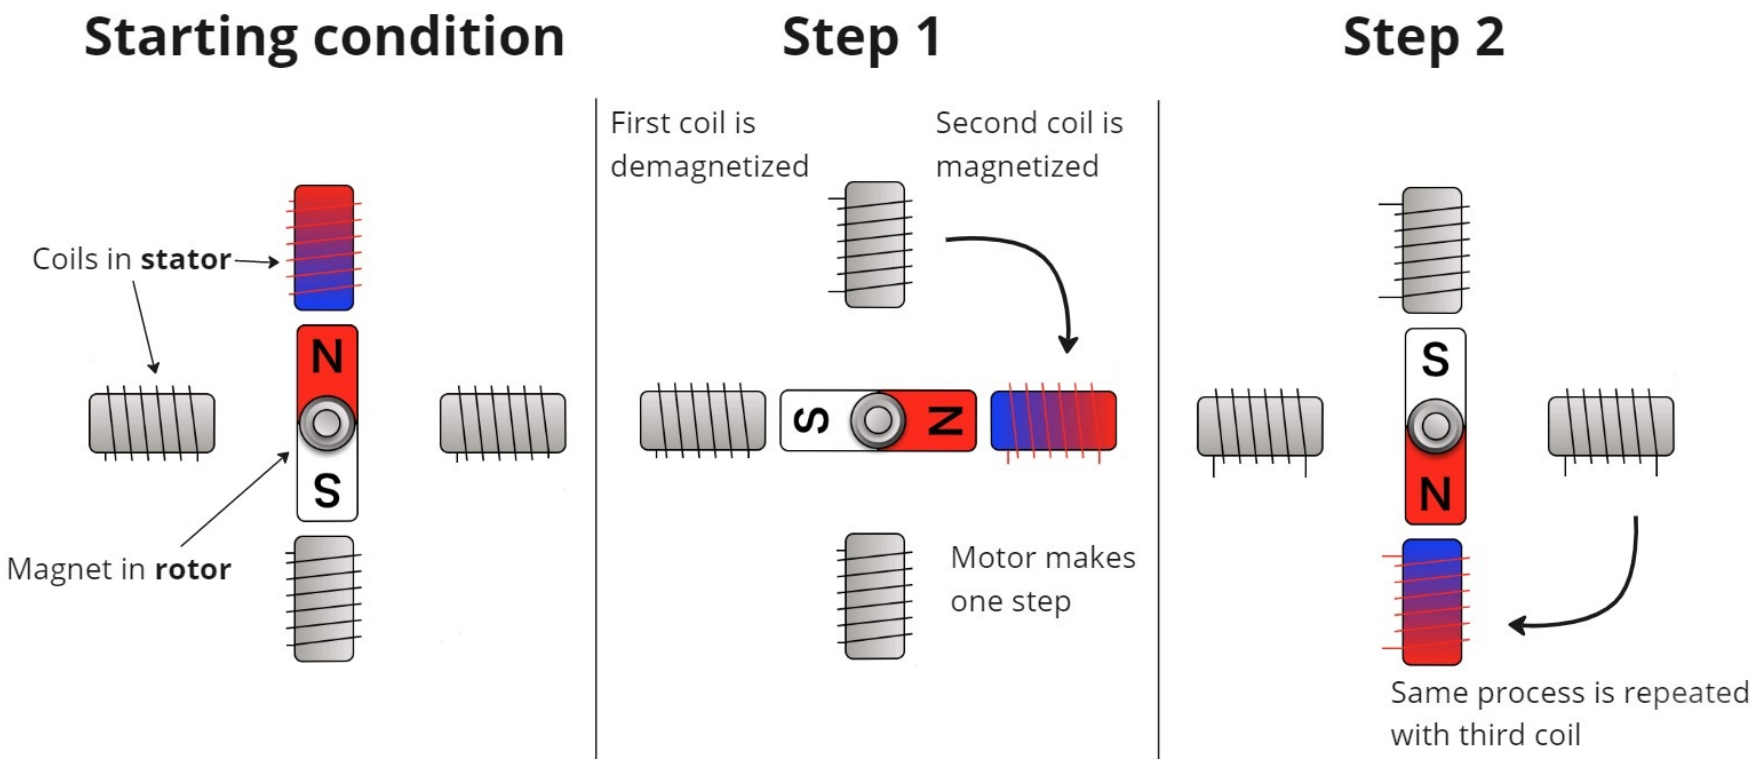

Stepper motor - real

- Stepper motor in this lab has 2048 steps (it has 64:1 gear ratio)
- This number of steps is achieved by "toothed" electromagnets

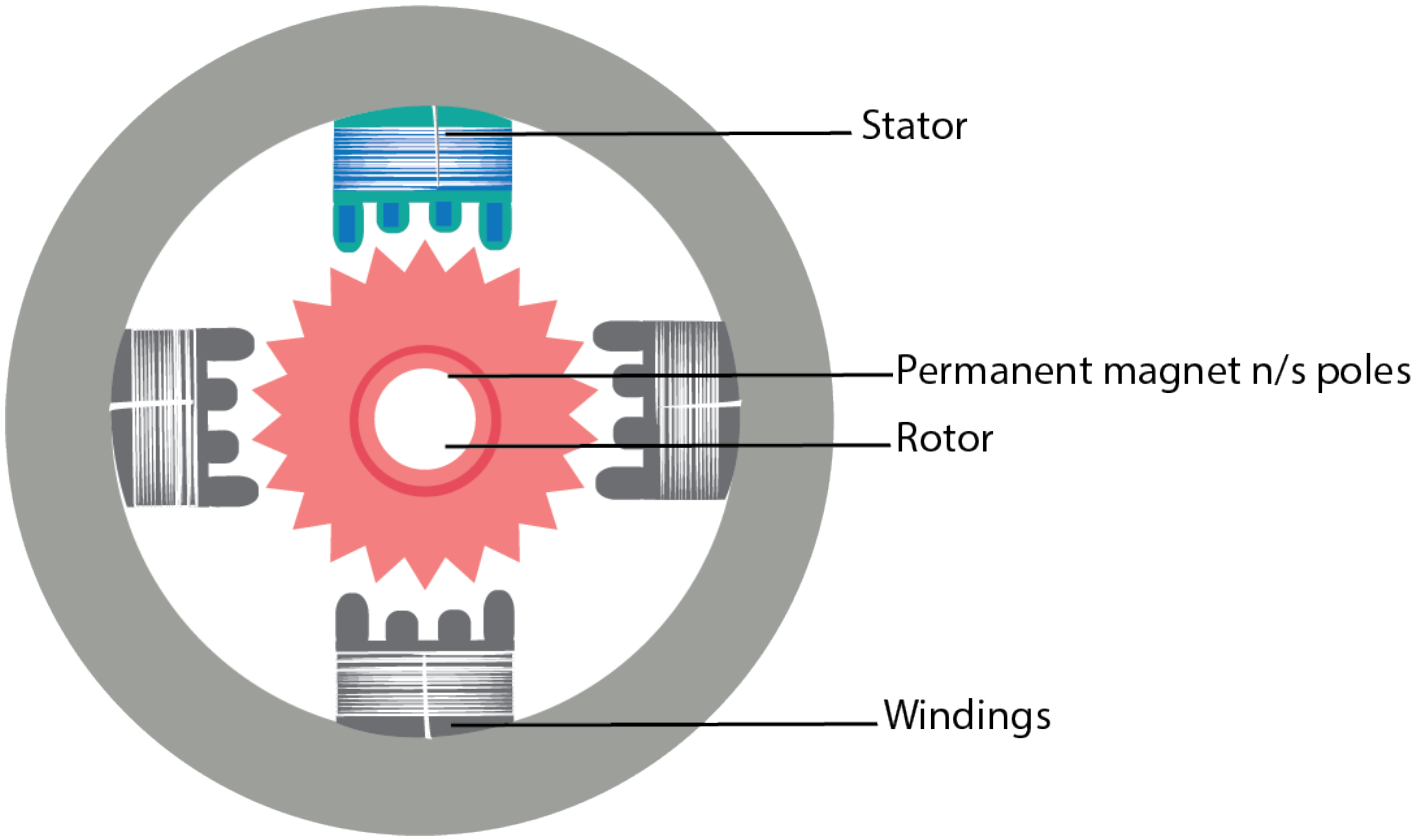

Coils need to be magnetized in order as shown in tables

Full step sequences

Lower torque method

Step Number	Coil 1	Coil 2	Coil 3	Coil 4
1	HIGH	LOW	LOW	LOW
2	LOW	HIGH	LOW	LOW
3	LOW	LOW	HIGH	LOW
4	LOW	LOW	LOW	HIGH

Higher torque method

Step Number	Coil 1	Coil 2	Coil 3	Coil 4
1	HIGH	LOW	LOW	HIGH
2	HIGH	HIGH	LOW	LOW
3	LOW	HIGH	HIGH	LOW
4	LOW	LOW	HIGH	HIGH

Half-step method offers more steps per rotation

Half step sequence

Step Number	Coil 1	Coil 2	Coil 3	Coil 4
1	HIGH	LOW	LOW	LOW
2	HIGH	HIGH	LOW	LOW
3	LOW	HIGH	LOW	LOW
4	LOW	HIGH	HIGH	LOW
5	LOW	LOW	HIGH	LOW
6	LOW	LOW	HIGH	HIGH
7	LOW	LOW	LOW	HIGH
8	HIGH	LOW	LOW	HIGH

Stepper motor - Driver

Since stepper motors can drain more current than microcontroller can provide, there is need for drivers.

- Drivers can be simple electrical circuits
- They amplify current
- Driver used in this laboratory - ULN2003
  - Consists of Darlington transistors

PCB with driver

Pinout

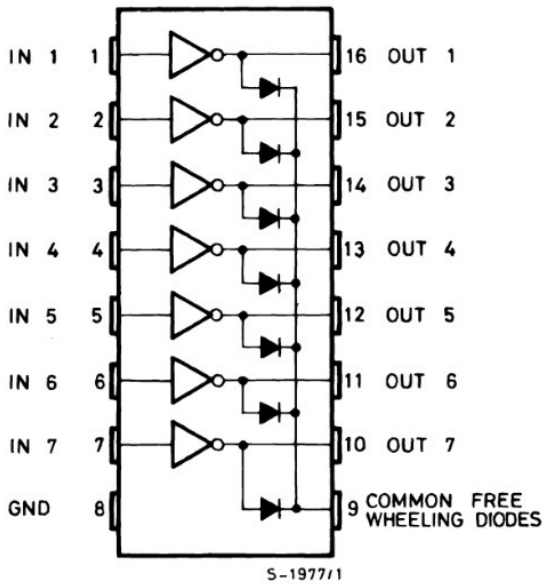

Schematic diagram

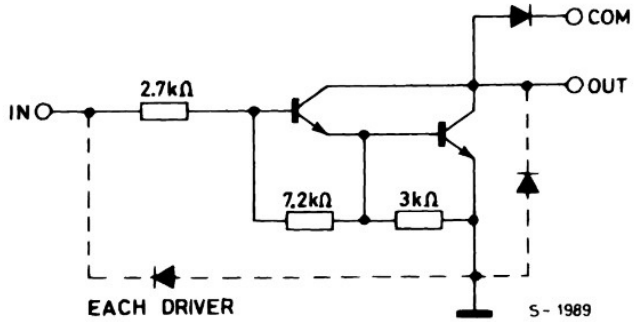

ULN2003 (each driver)

Stepper motor - Pinout

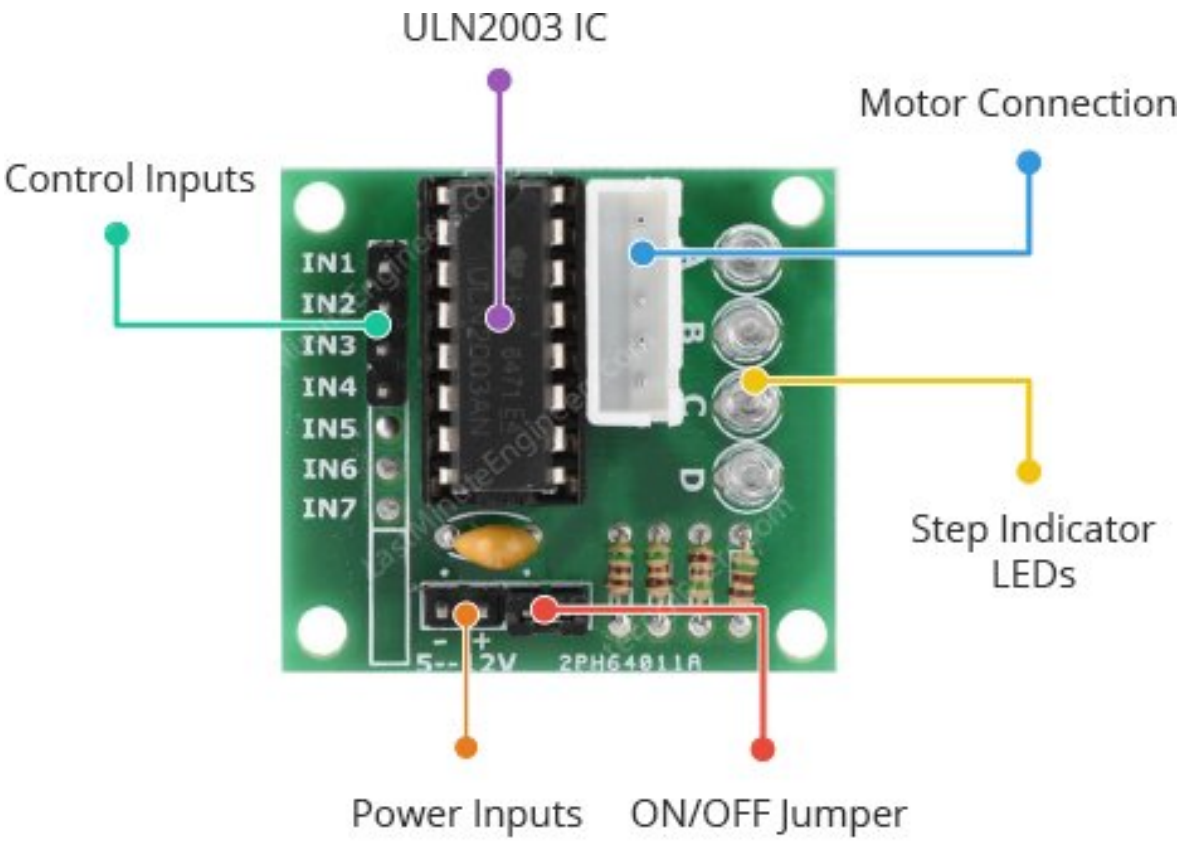

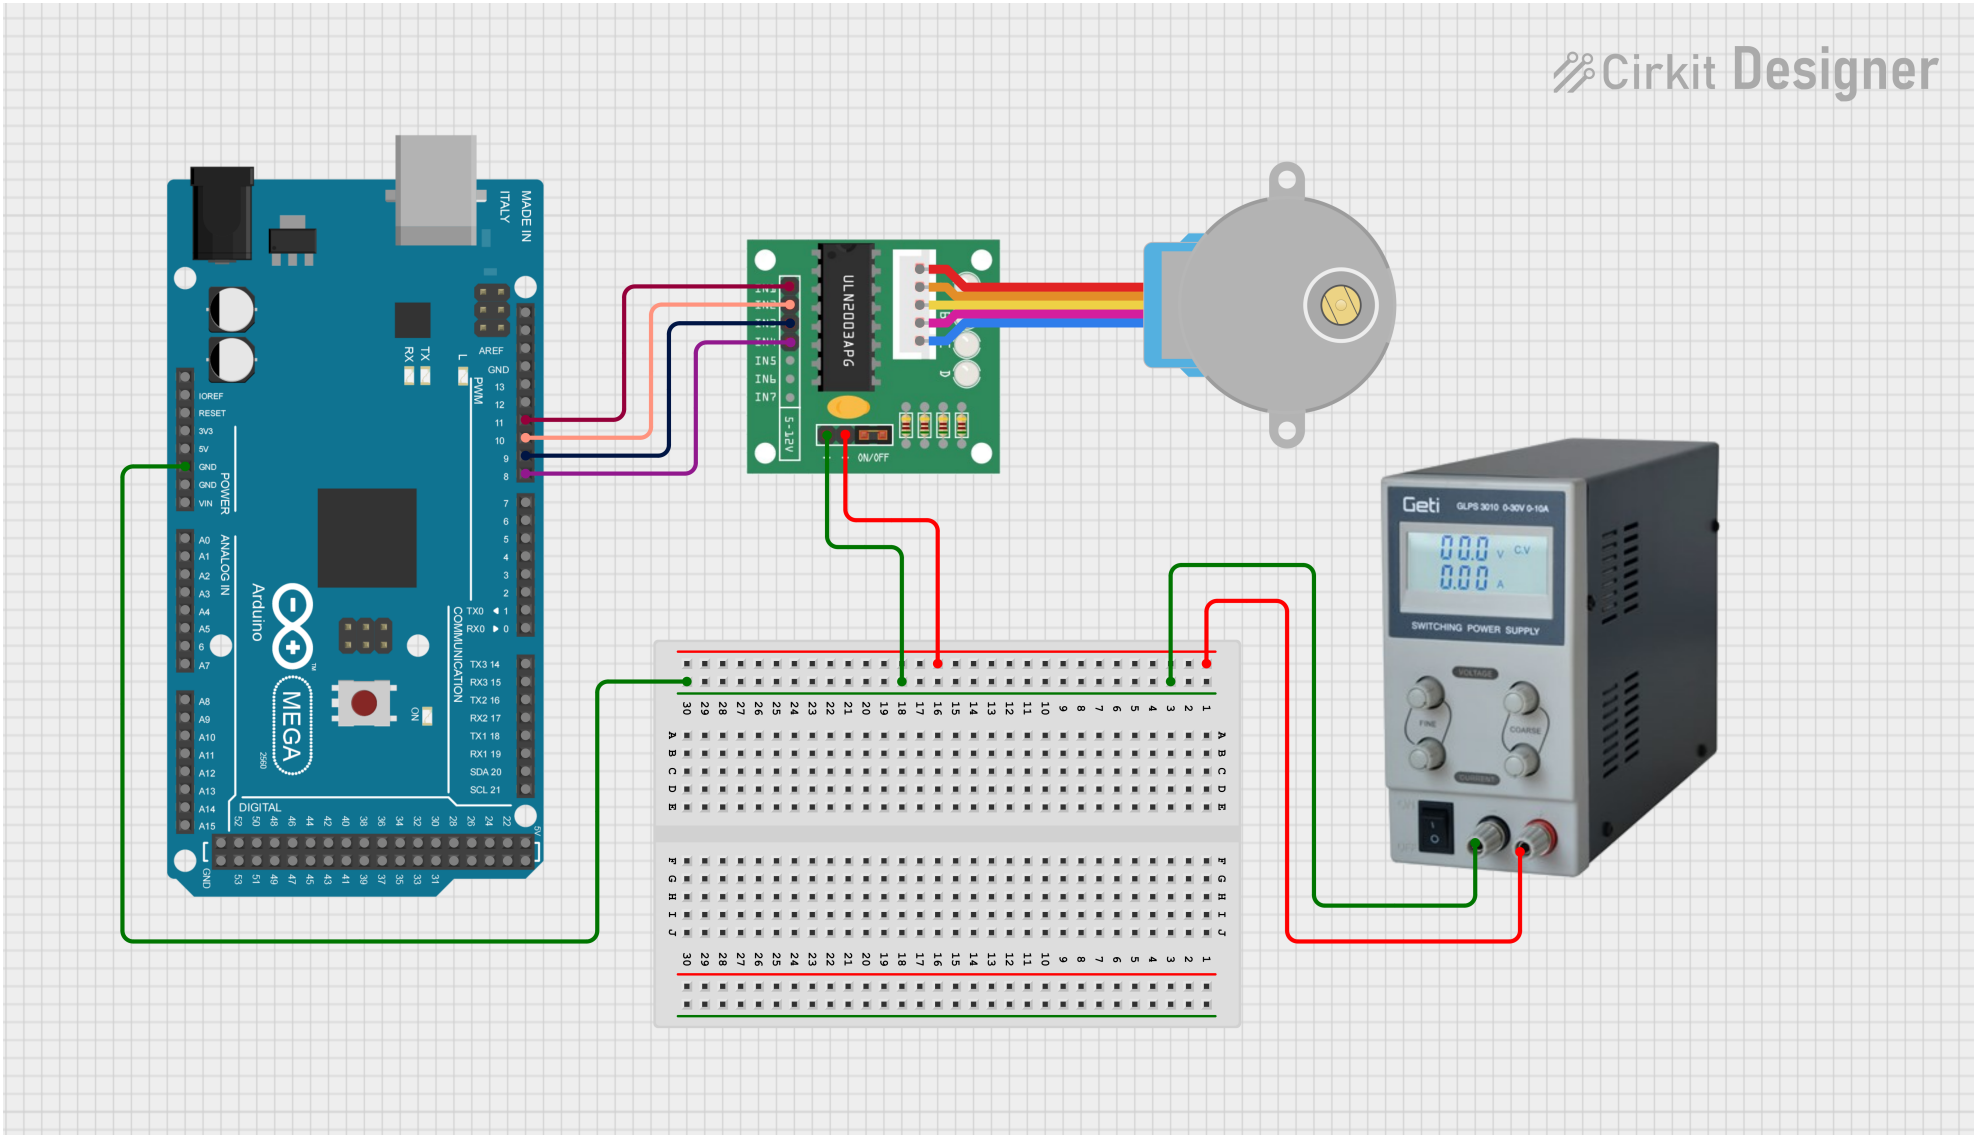
Cirkit Designer
MADE IN ITALY
Arduino
MEGA
ULN2003A
IN5
IN6
IN7
5-12V
ON/OFF
Geti
GLPS 3010 0-30V 0-10A
SWITCHING POWER SUPPLY

There are 2 ways of controlling stepper using Arduino:

- Writing custom implementation
  - Great for learning
  - Might use active waiting (not so great)
  - Can be modified
- Using library <Stepper.h>
  - Easier to use
  - Does not use active waiting
  - Cannot change step type (full/half)

Function for custom stepper control:

```
digitalWrite(pin, HIGH/LOW);  // Set pin to HIGH or LOW level
```

Methods from Stepper.h library:

```
#include <Stepper.h>    // Import built-in library

// Create Stepper object with given pins
// Need to know steps per revolution
Stepper myStepper = Stepper(stepsPerRevolution, p1,p2,p3,p4);

myStepper.setSpeed(x);  // Set speed for x RPM
myStepper.step(y);      // Make y steps
```

Write your own implementation that controls stepper motor.

- Open file Stepper_custom_PWM.ino
- Take a look at scheme Stepper_scheme.png and create circuit as it shown at the image
- Follow the instructions and implement stepper motor control
- Upload the code
- Test your implementation by uploading your code and observing stepper motor movement

Stepper motor - library function

Write stepper motor controller using <Stepper.h> library.

- Open file Stepper_library.ino
- Reuse scheme from previous excercise
- Follow the instructions and implement stepper motor control
- Upload the code
- Test your implementation by uploading your code and observing stepepr motor movement

Converts electiral energy into continuous rotary motion

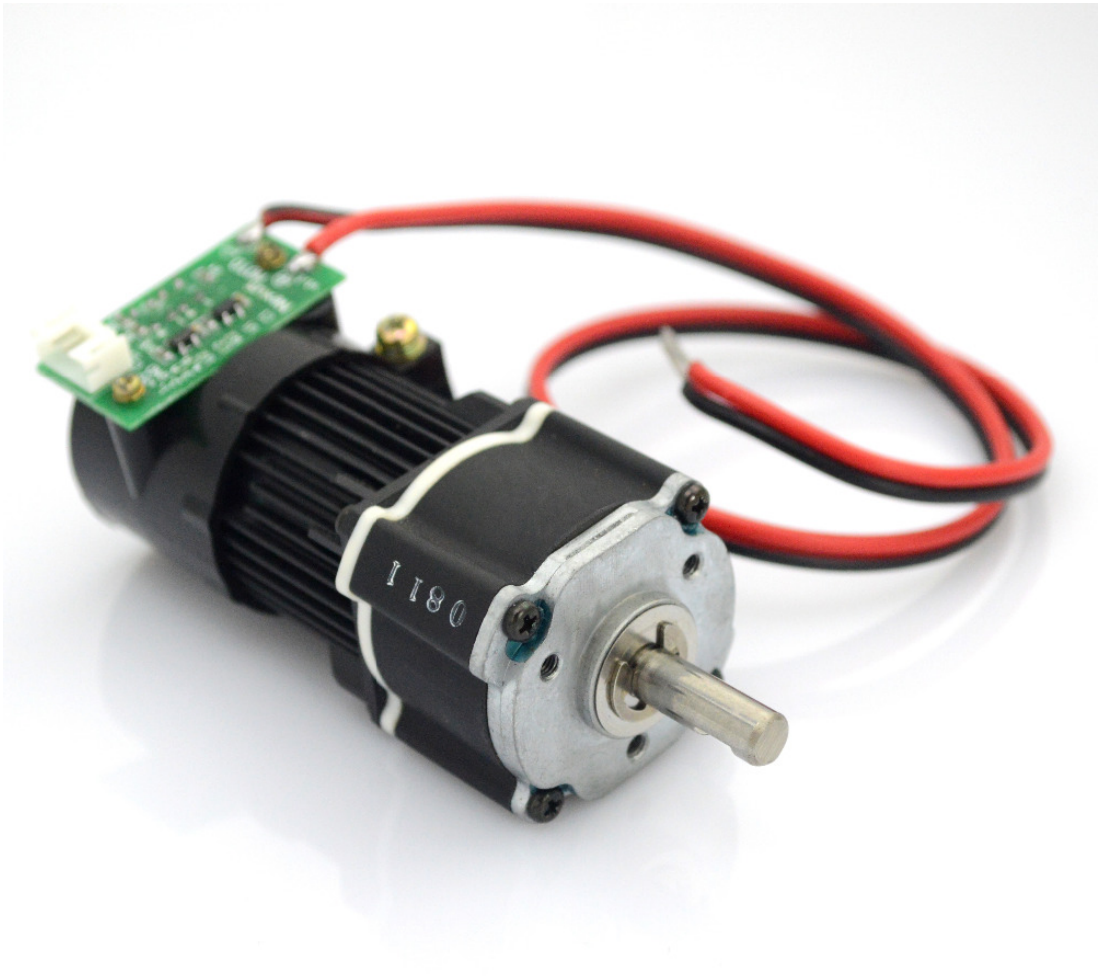

DC - What it is used for

DC motors can be found in fans, RC cars, Electric cars, Trains....

DC motor - woking principle

Working principle:

- Works based on Lorentz Law
- The current carrying conductor placed in a magnetic and electric field experience a force

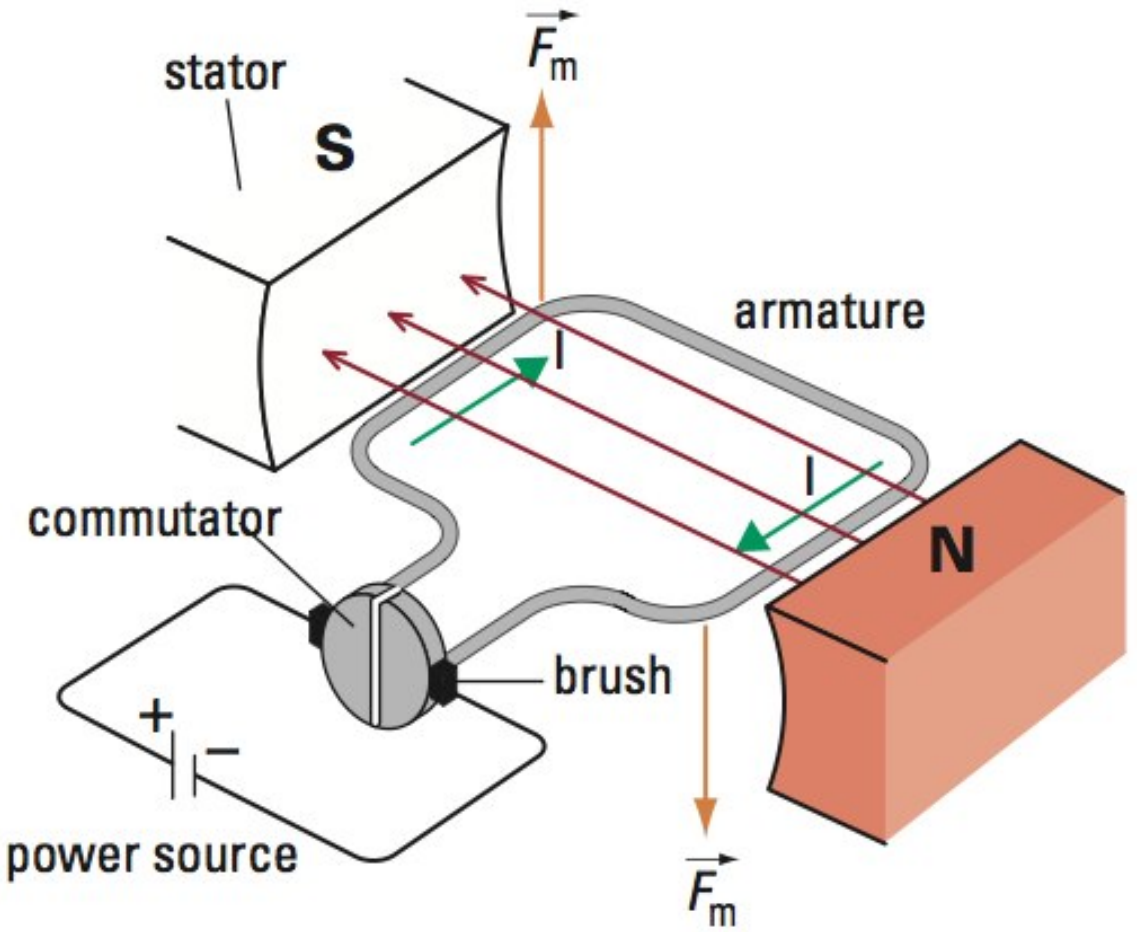

Motor itself is controlled by PWM. But this signal might be weak for power-hungry motor, therefore it needs amplification. This lab focuses on 3 ways:

- Transistor
- H-Bridge
- Motor driver L293D

Transistor is semiconductor electrical part

- In this application acts as a switch.
- Has 3 pins - Collector, Emitor and Base
- Can be switched on/off by applying or removing voltage at the Base
- Allows to control motor's speed but not direction

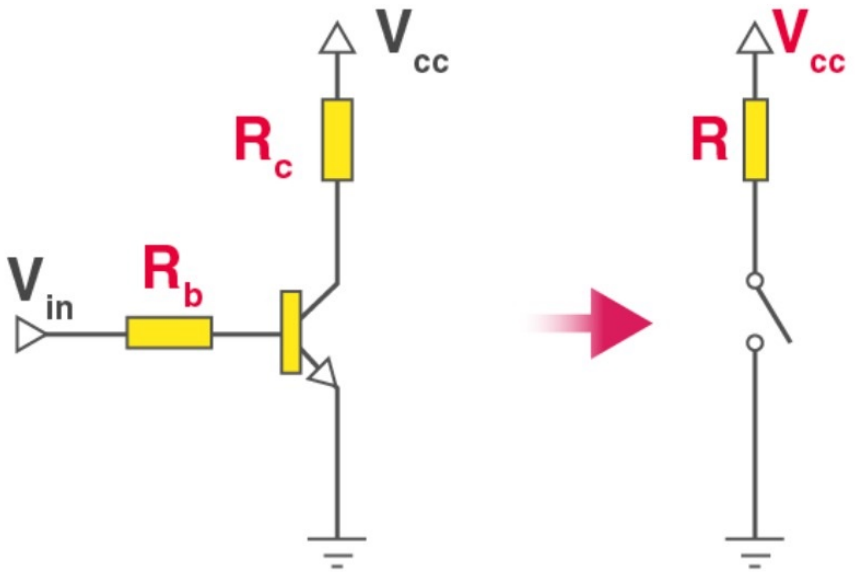

Function for custom DC motor control using transistor:

```
// Sets PWM to given pin
// val should be from range <0,255>
analogWrite(pin, val);
```

DC motor - Transistor - scheme

TODO PCB SCHEME

Write program that will control speed of rotation of a DC motor.

- Open file DC_transistor.ino
- Take a look at scheme DC_transistor_scheme.png and create circuit as it shown at the image
- Follow the instructions and implement DC motor control
- Upload the code
- Test your implementation by uploading your code and observing DC motor movement

Bonus: Try and change rotation of the DC motor

DC motor - H-Bridge

H-Bridge is electrical circuit that consists of 4 transistors.

- General scheme looks like a letter H - therefore the name is H-bridge
- Allows to control motor's speed as well as direction
- Can spin or stop the motor
- In order to spin the motor, one pair of diagonally oppposite transistors need to be opened

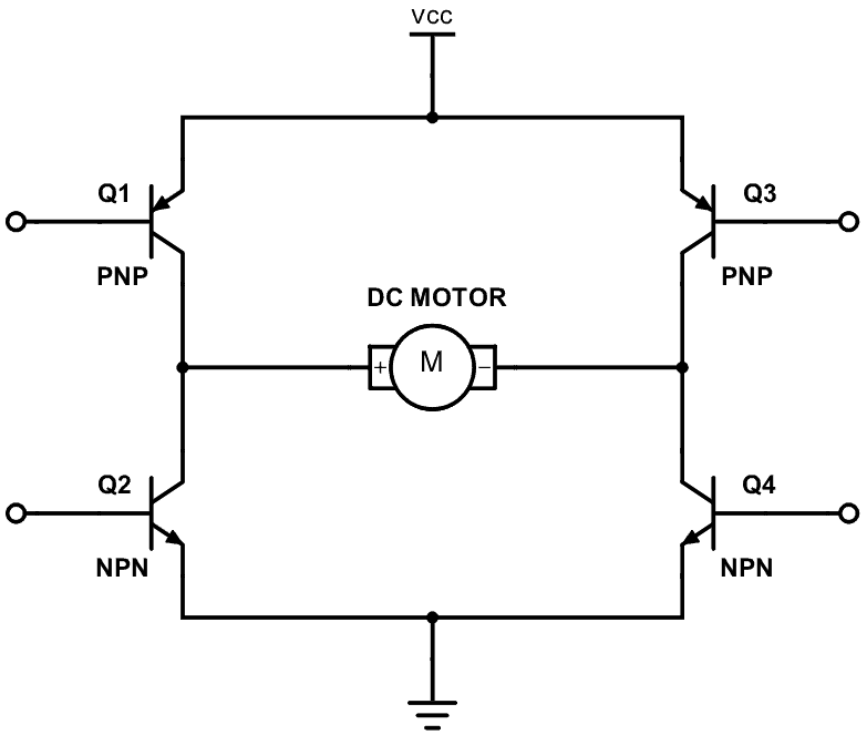

Spinning motor

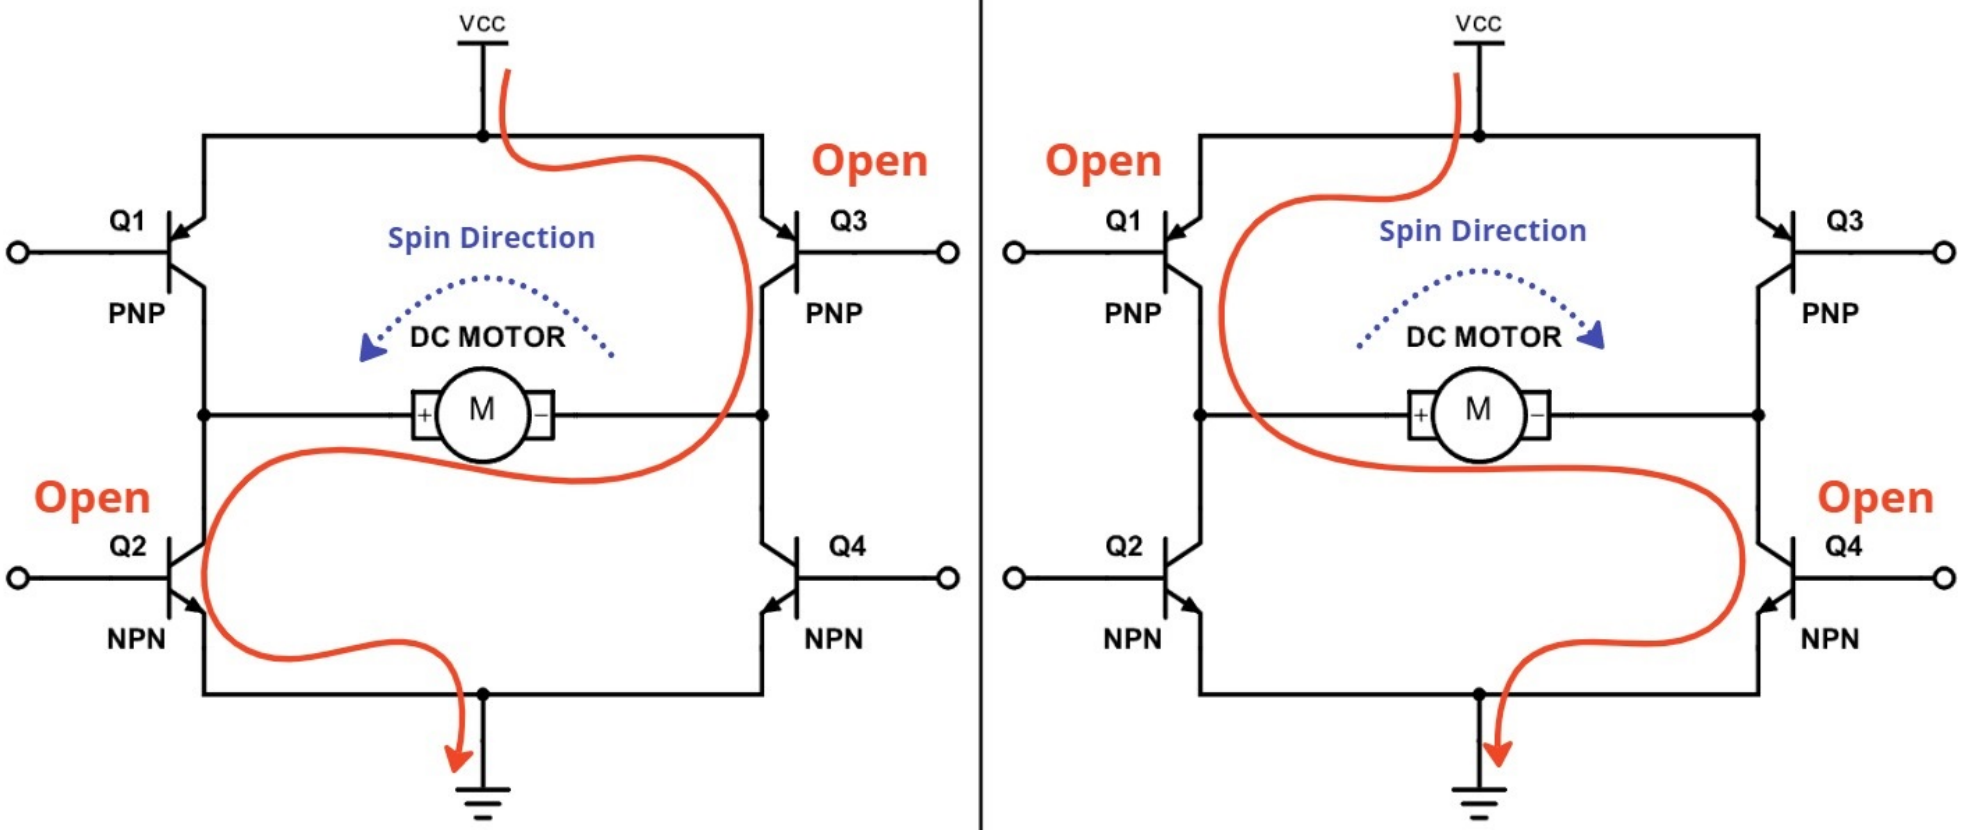

Stopping motor

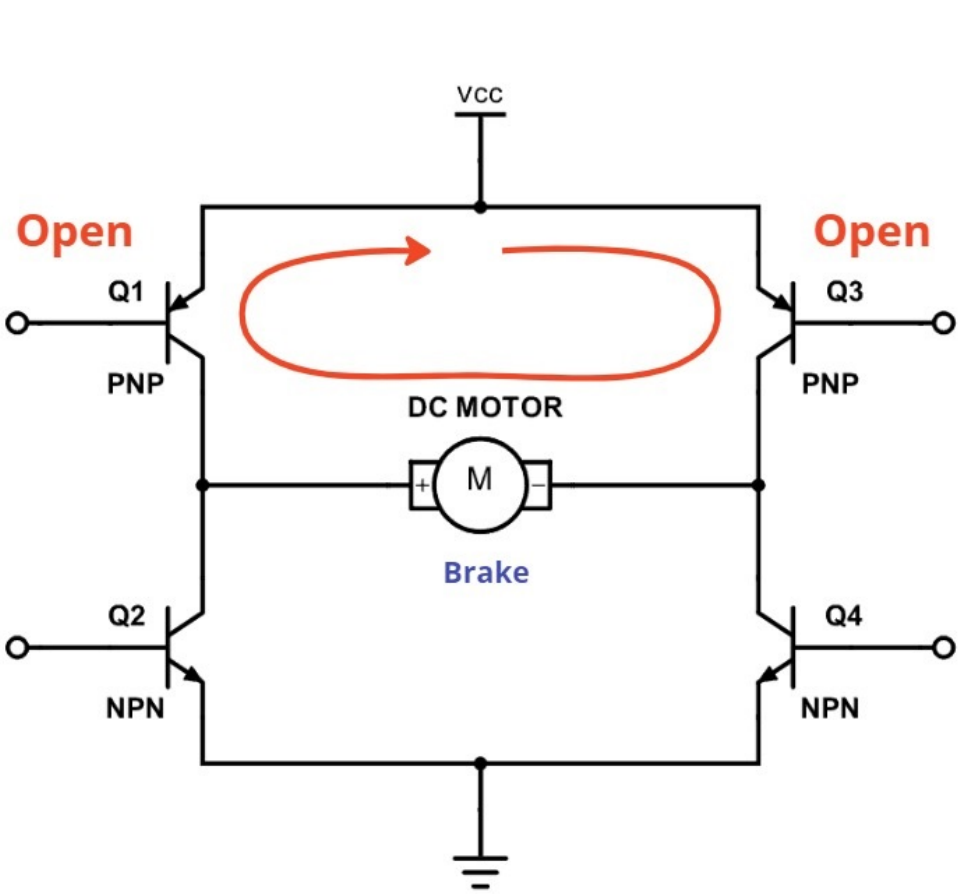

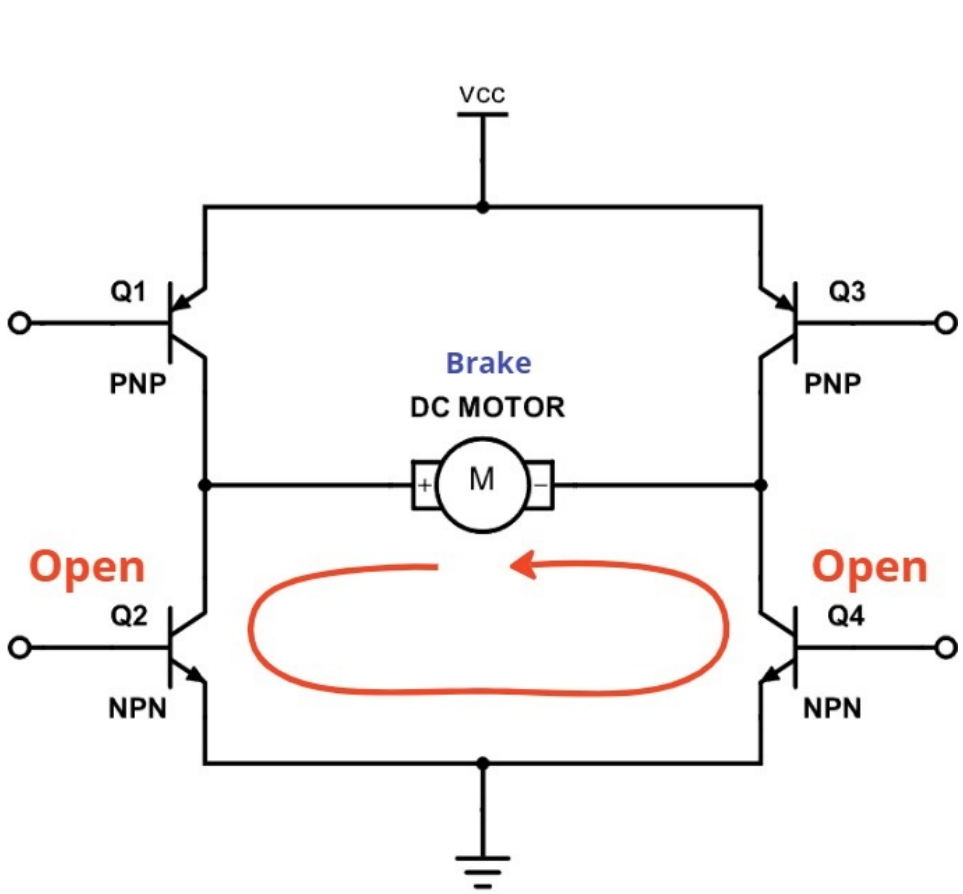

Shorted power supply - BAD

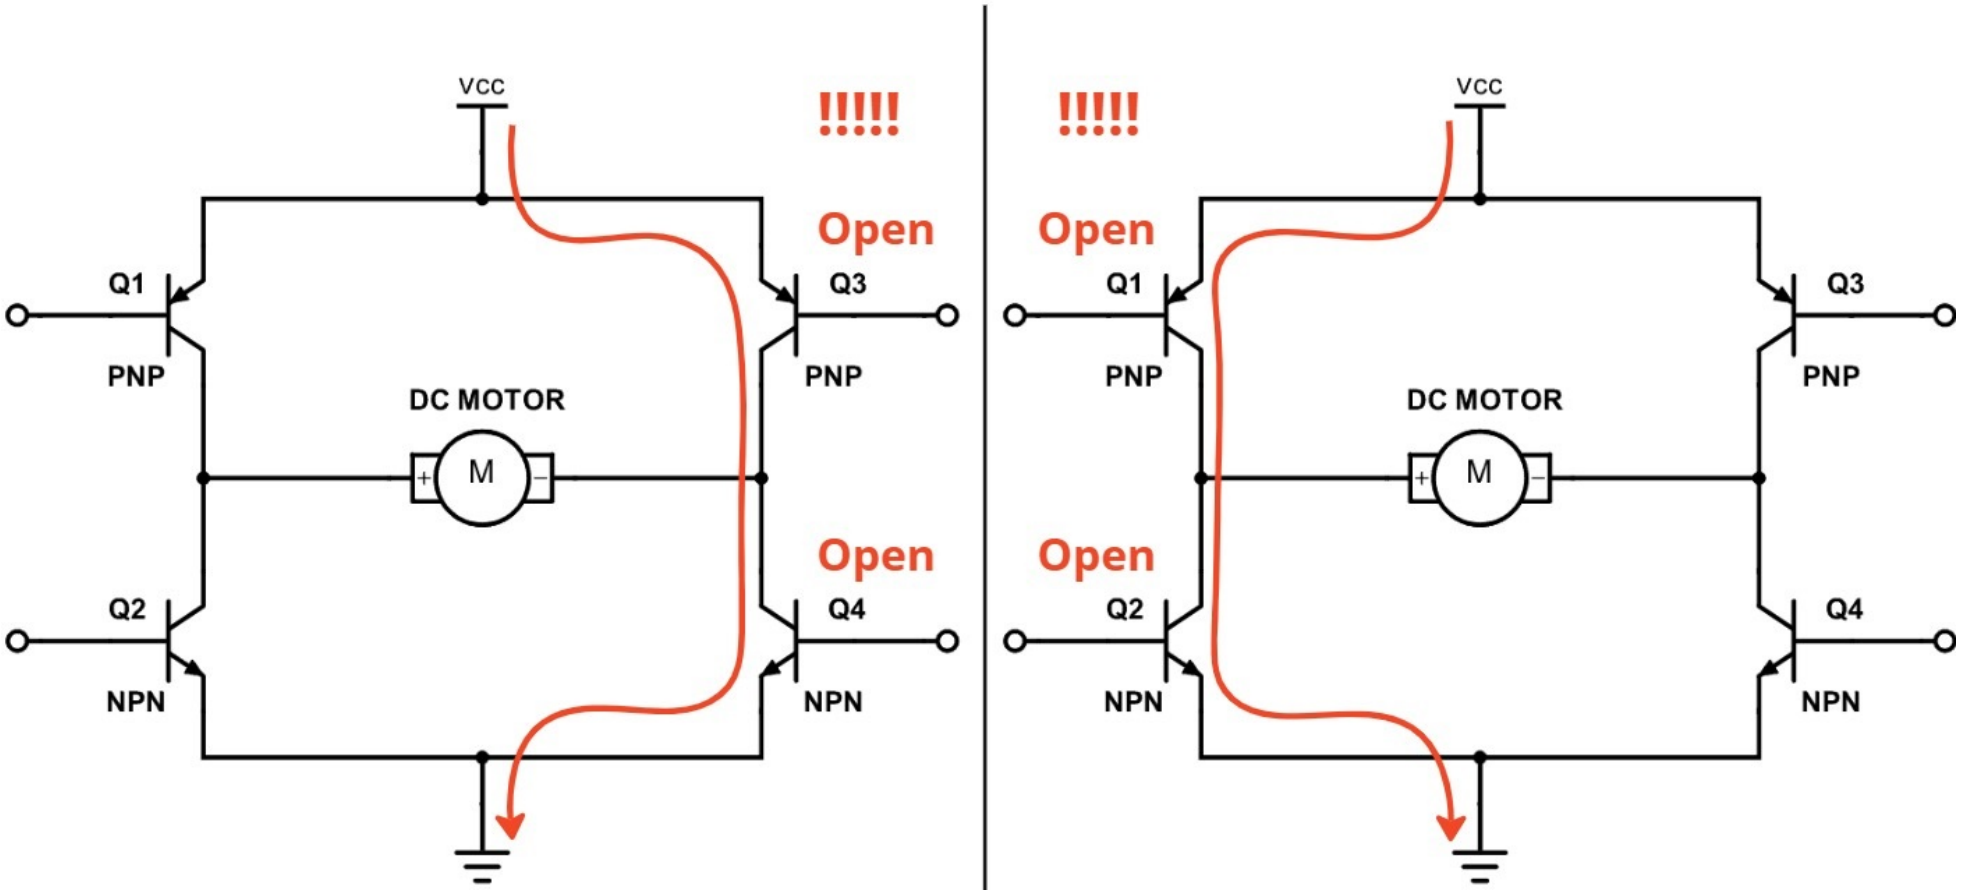

Table of H-Bridge states:

Sw1	Sw2	Sw3	Sw4	Operation
1	1	0	0	Moves Right Side
0	0	1	1	Moves Left Side
1	0	1	0	Motor Brakes
0	1	0	1	Motor Brakes
1	0	0	1	Short Circuit
0	1	1	0	Short Circuit
1	1	1	1	Short Circuit

Function for custom DC motor control using H-Bridge:

```
// Custom function made for this exercise
// Sets transistors T1, T2, T3, T4 to given value
// Values: 1/true  - transistor opened
//         0/false - transistor closed
set_H_Bridge(t1,t2,t3,t4);
```

DC motor - H-Bridge - scheme

TODO PCB SCHEME

Write program that will control speed and direction of rotation of a DC motor.

- Open file DC_H_Bridge.ino
- Take a look at scheme DC_H_Bridge_scheme.png and create circuit as it shown at the image
- Follow the instructions and implement DC motor control
- Upload the code
- Test your implementation by uploading your code and observing DC motor movement

Motor driver L293D contains 4 Half-H Drivers

- Allows to control motor's speed as well as direction
- Can support up to 2 motors
- Has 1 Enable pin and 2 Input pins
- Speed is controlled by PWM at Enable Pin
- Can not be shorted by wrong combination

image a blok here

Table of possible input/output states:

Enable	Input 1	Input2	Output
HIGH	HIGH	LOW	Turn right
HIGH	LOW	HIGH	Turn left
HIGH	HIGH	HIGH	Fast motor stop
HIGH	LOW	LOW	Fast motor stop
LOW	X	X	Free-running motor stop

Functions for custom DC motor control using L293D:

```
// Set pin to HIGH or LOW level
// Used for Input pins
digitalWrite(pin, HIGH/LOW);

// Sets PWM to given pin
// val should be from range <0,255>
// Used for Enable pin
analogWrite(pin, val);
```

DC motor - Driver L293D - scheme

TODO PCB SCHEME

Write program that will control speed and direction of rotation of a DC motor.

- Open file DC_L293D.ino
- Take a look at scheme DC_L293D_scheme.png and create circuit as it shown at the image
- Follow the instructions and implement DC motor control
- Upload the code
- Test your implementation by uploading your code and observing DC motor movement

Encoders

Take a look at output from encoders at an oscilloscope

- Reuse any code that controls motor
- Take a look at scheme DC_Encoders_scheme.png and create circuit as it shown at the image
- Run the motor and look at the oscilloscope

Thank You For Your Attention !