

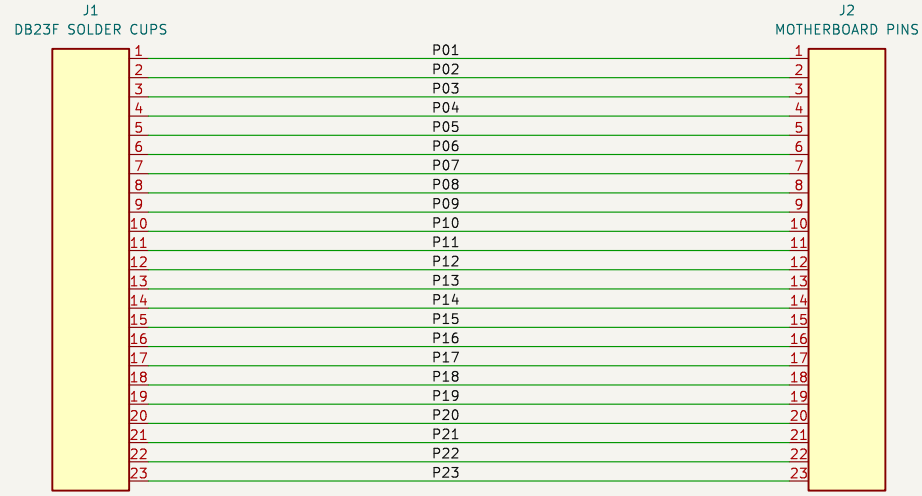




Passive pin-for-pin replacement. J1 pin n connects only to J2 pin n.
J3 pads are M3 mounting lands on SHIELD, aligned to the original motherboard shell anchors.
J4 is a dedicated shell-wire bond: solder away from the mounting nut and washer bearing faces.
Provide a deliberate connector-shell bond and verify hardware continuity to motherboard shell ground.
No video ground pins, pin 13, or supply rails are joined by this board.
J1 solder cups: 1–12 on F.Cu, 13–23 on B.Cu. Actual connector fit remains unverified.



FIT PROTOTYPE – measure selected solder-cup DB23 before manufacture

UK Computing Limited

Sheet: /
File: DB23F_Floppy.kicad_sch

Title: DB23F_Floppy DB23 replacement

Size: A4	Date: 2026-10-29	**Rev: 0.5**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1