

TPSC G1

LED Selectable Panel Gen 1 **CONTROL XP**

Due to continuous product improvements, specification and/or equipment updates may change without notice.

Project:

Catalog #:

Fixture Type:


Notes:



Replaces up to 9 similar static luminaires.

qty 24

qty 468

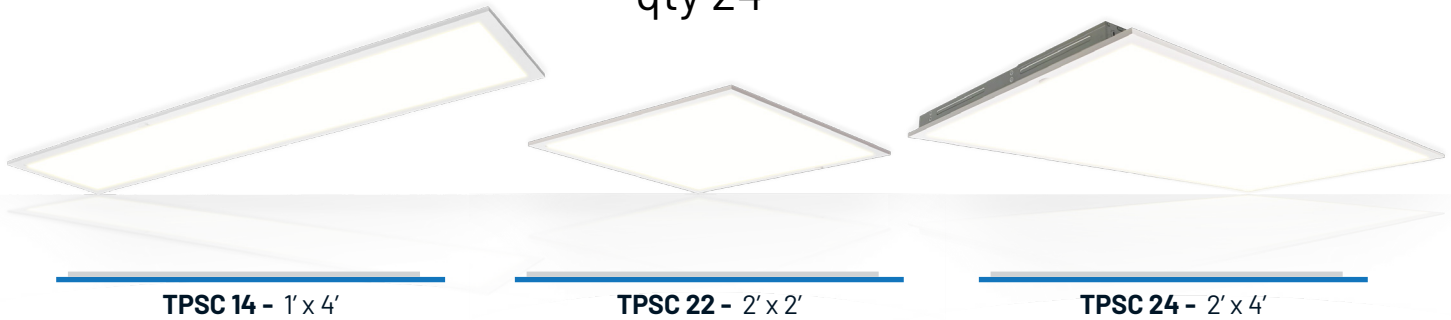

TPSC 14 - 1' x 4'

TPSC 22 - 2' x 2'

TPSC 24 - 2' x 4'

The **TPSC Series** transforms your options in an LED backlit panel with embedded controls options and sku-saving switch selectable power/CCT outputs. The built-in controls receptacle gives your customers a "controls today" or "controls tomorrow" flexibility and a simple plugin motion sensor option to make installation easy. Available in 1' x 4', 2' x 2', or 2' x 4' sizes, this panel series is ready for quick quotes on projects giving you the freedom to bid more jobs.

Catalog Number	Description	Lumens	Watts	CCT	Voltage
TPSC 14 LS45 G1FSK	LED Selectable Backlit Panel - 1'x4' with built in 2.5 mm receptacle	Selectable 2,750 - 4,450 Lm	Selectable 25 - 40W	Selectable 3500K - 5000K	120V - 277V
TPSC 22 LS45 G1FSK	LED Selectable Backlit Panel - 2'x2' with built in 2.5 mm receptacle	Selectable 2,750 - 4,450 Lm	Selectable 25 - 40W	Selectable 3500K - 5000K	120V - 277V
TPSC 24 LS55 G1FSK	LED Selectable Backlit Panel - 2'x4' with built in 2.5 mm receptacle	Selectable 3,300 - 5,500 Lm	Selectable 30 - 50W	Selectable 3500K - 5000K	120V - 277V

ORDERING GUIDE

Example: TPSC 22 LS45 G1FSK

Fixture Type	Size	Selectable Lumen Output	Generation	Voltage	Selectable CCT	Finish	Options - Emergency Backup	Options - Controls	Options - Accessories
• TPSC Selectable Backlit Panel	• 14 1' x 4'	• LS45 2,750 Lm / 25 W	• G1 First Generation	• BLANK 120-277 V	• FSK 3500K 4000K 5000K	• BLANK White	• BLANK No backup. • EMD-PA08D-UNV-050 Emergency backup (120-277V).	• BLANK No motion sensor • Networked OSLG sync • MSB-DCE-08-TL25 Bluetooth TWIST-LOCK motion sensor • Standalone OSLG sync • MS-DCE-08-TL25 Standalone basic motion sensor • RM-06 Remote control for standalone motion sensor	• BLANK None • 2x2SMK-4IN Surface Mount Kit for TPSC 22 - 4" height • 2x4SMK-4IN Surface Mount Kit for TPSC 24 - 4" height • 1x4SMK-4IN Surface Mount Kit for TPSC 14 - 4" height • 2x2 FLANGE Flange kit for TPSC 22 • 2x4 FLANGE Flange kit for TPSC 24 • 1x4 FLANGE Flange kit for TPSC 14 • TP-SCABLE Suspended Cable for Panel, 1 set per luminaire, 7 ft Max
	• 22 2' x 2'	• LS45 3,300 Lm / 30 W 4,450 Lm / 40 W							
	• 24 2' x 4'	• LS55 3,300 Lm / 30 W 4,400 Lm / 40 W 5,500 Lm / 50 W							

Performance Information

Series Number	Power	Wattage	LUMENS	LPW	CCT	Series Number	Power	Wattage	LUMENS	LPW	CCT
TPSC 14 LS45	High	40 W	4,450 Lm	112 Lm/W	3500K	TPSC 22 LS45	High	40 W	4,450 Lm	112 Lm/W	3500K
	Med	30 W	3,300 Lm	110 Lm/W	4000K		Med	30 W	3,300 Lm	110 Lm/W	4000K
	Low	25 W	2,750 Lm	110 Lm/W	5000K		Low	25 W	2,750 Lm	110 Lm/W	5000K
Series Number	Power	Wattage	LUMENS	LPW	CCT						
TPSC 24 LS55	High	50 W	5,500 Lm	110 Lm/W	3500K						
	Med	40 W	4,400 Lm	110 Lm/W	4000K						
	Low	30 W	3,300 Lm	110 Lm/W	5000K						

Specifications

Housing

Steel sheet and extruded aluminum - frosted polysrene lens.

Ambient Temperature

Suitable for use in -4° F to 122° F (-20°C to 50° C).

Mounting

Recessed Ceiling Mounting (default), Surface and Suspended Mounting with optional accessories.

Efficacy

Up to 112 lumens per watt.

CCT

Field selectable: 3500K, 4000K, and 5000K.

Lumen Output

Field selectable: 2,750 - 5,500 Lm.

Controls Functions

Multifunction and energy monitoring, daylight sensor, occupancy sensor, integral sensor receptacle, high-end trim, Bluetooth, and Luminaire Level Lighting Control (LLLC).

Warranty

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

Electrical

Standard 120V - 277V

0-10V dimming standard.

Lifespan

L70 > 100,000 hours based on IES LM-80 results and TM-21 calculations.

Certifications

UL Listed for damp locations. FCC compliant. Design Lights Consortium® (DLC) standard 5.1 listed.


Built-in Receptacle



Along the frame

The 2.5 mm receptacle is built into the panel's frame, delivering full edge-to-edge illumination and a seamless look.

The twist-lock cover blends into the panel frame until controls are needed and then simply twist's out for easy controls added.

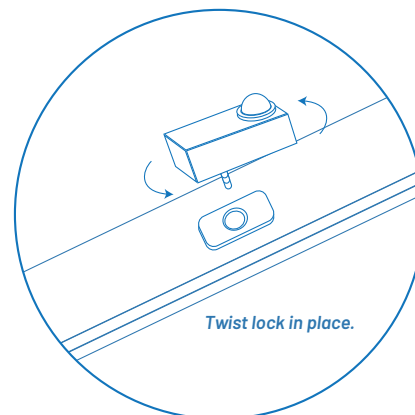

DLC ID


Series Number	DLC ID
TPSC 14 LS45	S-3P5W3M
TPSC 22 LS45	S-45511H
TPSC 24 LS55	S-WC72TV

TPSC G1




Dimensions Unit: in / mm


TPSC 24

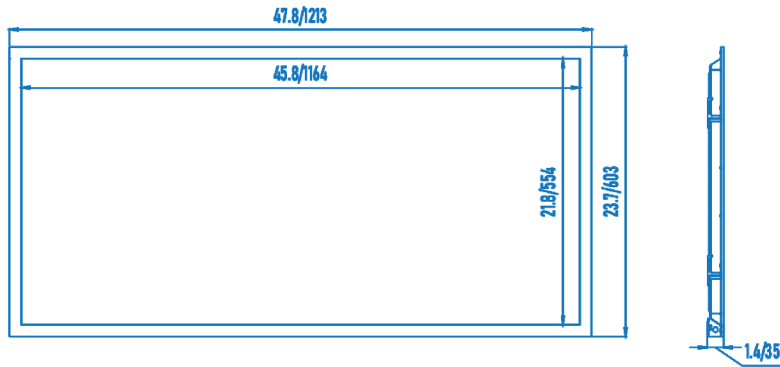

TPSC 22

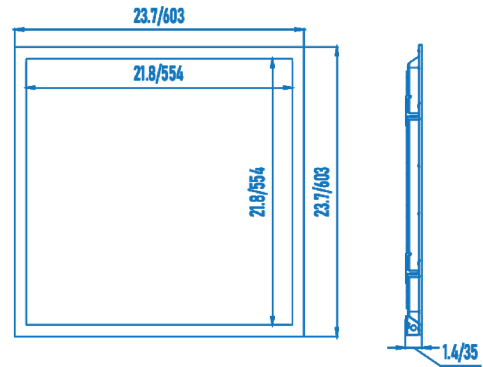

TPSC 14

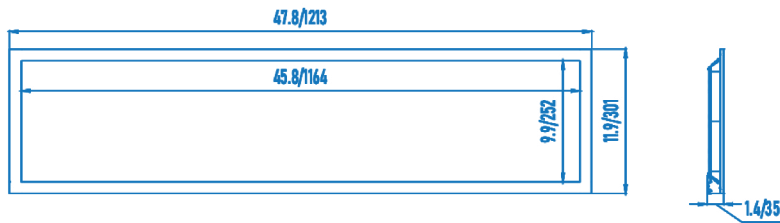

Electrical Load

	Power	Wattage	Current (A)			
			120V	208V	240V	277V
TPSC LS45	Low	25 W	0.21	0.12	0.10	0.09
	Med	30 W	0.25	0.14	0.13	0.11
	Max	40 W	0.33	0.19	0.17	0.14

	Power	Wattage	Current (A)			
			120V	208V	240V	277V
TPSC LS55	Low	30 W	0.25	0.14	0.13	0.11
	Med	40 W	0.33	0.19	0.17	0.14
	Max	50 W	0.42	0.24	0.21	0.18

Shipping Information

Product Number	Individual Box Size	Individual Box Weight	# Per Carton	# Per Pallet
TPSC 14 LS45 G1 FSK	-	-	4	-
TPSC 22 LS45 G1 FSK	-	-	4	-
TPSC 24 LS55 G1 FSK	-	-	4	-

Controls

SLG sync™ MSB-DCE-08-TL25 Bluetooth Motion Sensor



Specifications

Input Voltage DC 12V	Detection Range 32 ft. Max
Input Current 30mA Max	Mounting Height 15 ft. Max Suggested
Input Power 0.36W	Bluetooth Transmit 100' Max
Output Current 10mA Max	Operating Temperature -30°C - 55°C (-22°F - 131°F)
Output Power 0.1W	IP Rating IP20
Dimming: 10mA Max	Warranty: 5 Year

Commissioning

This Bluetooth sensor/controller is easily commissioned via the SLG Sync app, available for download on Google Play and the App Store.

App Download:



For commissioning guide and more information visit:
www.slgsync.com

SLG sync™ MS-DCE-08-TL25 Standalone Motion Sensor



Specifications


Input Voltage DC 12V	Detection Range 26 ft. Max
Input Current 15mA Max	Mounting Height 14 ft. Max Suggested
Voltage Range 10-15 VDC	Operating Temperature -25°C - 60°C (-13°F - 140°F)
Output Current 10mA Max	IP Rating IP20
Stand-by Power <0.5W	Warranty: 5 Year

Commissioning

This basic sensor is commissioned via the RM06 remote. Either pre-commissioned or commissioned on site.



CONTRACTOR XP

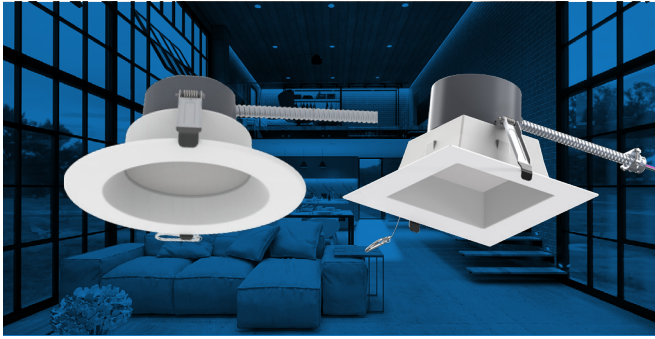

(Images are shown for illustration purposes only)

Project:

Product #:

Type:

KEY FEATURES

- Switch selectable Power - 5 Settings.
- Switch selectable CCT - 5 Settings.
- Four sizes - 4", 6", 8" & 10" round.
- 5 year warranty.
- Universal Dimming Driver (TRIAC, 0-10V, & ELV).



SPECIFICATIONS

Housing

UL94-5VA fire rated PC materials driver box. Housing less design with spring-action housing clips. 26" flexible conduit/whip with knockout quick connector. Aircraft design to support second drop protection.

Operating Temperature

-25° C to 40° C (-13° F to 104° F).

Mounting

Retrofit or New construction recessed mount.

Efficacy

Up to 135 lumens per watt.

Beam Angle

90° (4" & 6"), 95° (8" & 10"). UGR <22.

Lens

Polycarbonate material diffuser.

CCT and CRI

Field Selectable: 2700K, 3000K, 3500K, 4000K, & 5000K - 90 CRI

Lifespan

L70 > 50,000 hours @ 25°C.

Warranty

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

Electrical

Standard voltage 120-277V. Universal Dimming Driver (Dim to off(0.7V), 10-100%). PF >0.9. THD <25%. 2.5KV Ring wave surge protection.

Certifications

UL listed. ETL listed. Energy Star listed. FCC compliant. Listed for wet locations, non-conductive trim. CA Title 24 Compliant: JA8-2022.

ORDERING GUIDE

Example: DRS 6R LS27 G4 9FSK

Fixture Type	Size	Selectable Lumen Output	Generation	Voltage	CCT & CRI	Finish
• DRS LED Commercial Downlight - Retrofit	• 4R 4" Round	• LS15 650 Lm / 5.5 W 850 Lm / 7 W 1,100 Lm / 9 W 1,200 Lm / 10 W 1,450 Lm / 13 W	• G4 Fourth Generation	• BLANK 120-277V	• 9FSK 2700K 3000K 3500K 4000K 5000K - CRI 90	• BLANK White
	• 6R 6" Round	• LS27 1,200 Lm / 9.5 W 1,600 / 13 W 2,200 Lm / 18.5 W 2,400 / 21 W 2,650 Lm / 24 W				
	• 8R 8" Round	• LS34 2,050 Lm / 16 W 2,450 / 20 W 2,700 Lm / 23 W 3,200 / 27 W 3,350 Lm / 30 W				
	• 10R 10" Round	• LS42 2,550 Lm / 20 W 2,850 / 24 W 3,200 Lm / 28 W 3,600 / 32 W 4,150 Lm / 38 W				
	• 4S 4" Square	• LS12 600 Lm / 6 W 850 Lm / 9 W 1,200 Lm / 13 W				
	• 6S 6" Square	• LS15 750 Lm / 8 W 1,100 Lm / 12 W 1,500 Lm / 16 W				

For stocking opportunities please reach out to your local SLG Lighting rep or contact sales@slgus.com.

Leadtimes may vary based on current inventory levels - always consult your local SLG Lighting rep for leadtimes and project needs.

ACCESSORIES

Emergency Backup	Mounting	Wall Wash	Goof Ring
• EMA-DH08D-UNV-170 8W Emergency Battery Kit	• DX-UNV-HOUSING New Construction Universal Housing for 4", 6", 8", and 10" Round Downlights. • DE 4/6/8S HOUSING New Construction Universal Housing for 4", 6", 8", and 10" Square Downlights.	• DRS-4RW-G3 4" Round Wall Washer • DRS-6RW-G3 6" Round Wall Washer • DRS-8RW-G3 8" Round Wall Washer	• DT-GR-4R W Downlight Goof Ring 4" Round • DT-GR-6R-W Downlight Goof Ring 6" Round • DT-GR-8R-W Downlight Goof Ring 8" Round • DT-GR-10R-W Downlight Goof Ring 10" Round

Accessories shown are generally stocked items, for additional accessories questions and options please contact your local SLG Lighting rep or email sales@slgus.com.

Options for spec needs available through special request - please contact sales@slgus.com with spec needs and project size.

Due to continuous product improvements, specification and/or equipment updates may change without notice.


PERFORMANCE INFORMATION

Series Number	Power Setting	Wattage	Lumens	Series Number	Power Setting	Wattage	Lumens	CCT
DRS LS15	Max	13 W	1,450 Lm	DRS LS27	Max	24 W	2,750 Lm	2700K 3000K 3500K 4000K 5000K
	Very High	10 W	1,200 Lm		Very High	21 W	2,400 Lm	
	High	9 W	1,100 Lm		High	18.5 W	2,200 Lm	
	Medium	7 W	850 Lm		Medium	13 W	1,600 Lm	
	Low	5.5 W	650 Lm		Low	9.5 W	1,200 Lm	
DRS LS34	Max	30 W	3,350 Lm	DRS LS42	Max	38 W	4,150 Lm	
	Very High	27 W	3,200 Lm		Very High	32 W	3,600 Lm	
	High	23 W	2,700 Lm		High	28 W	3,200 Lm	
	Medium	20 W	2,450 Lm		Medium	24 W	2,850 Lm	
	Low	16 W	2,050 Lm		Low	20 W	2,550 Lm	


Performance data based on vigorous, industry standard testing and has been verified by lab results.

DIMENSIONS

DRS G4 - Retrofit Commercial Downlight - Round

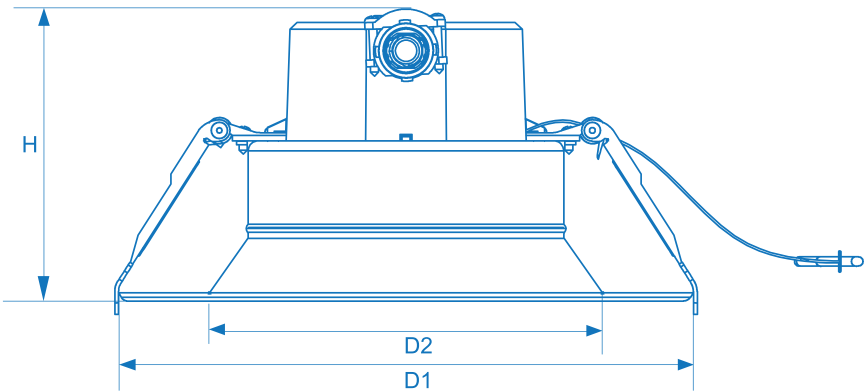

DRS G4 - J-Box Dimensions

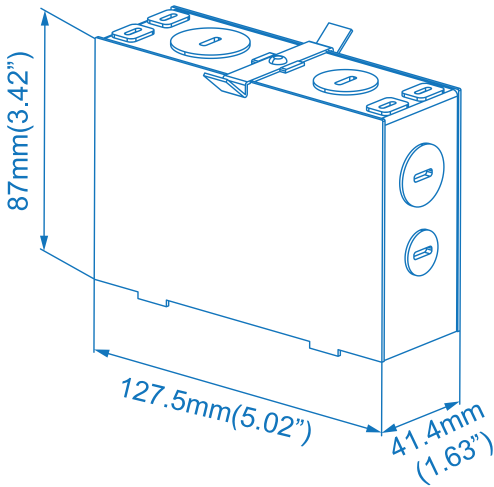


Model	Size	D1 (Diameter 1)	D2 (Diameter 2)	H (Height)	Cut-Out (Min to Max)
DRS 4R LS15 G4 9FSK	4"	5.98"	4.43"	3.71"	Ø 4.87" to Ø 5.67"
DRS 6R LS15 G4 9FSK	6"	8.41"	5.76"	4.19"	Ø 5.89" to Ø 8.10"
DRS 8R LS15 G4 9FSK	8"	10.04"	7.14"	4.51"	Ø 6.24" to Ø 9.72"
DRS 10R LS15 G4 9FSK	10"	11.38"	8.48"	4.98"	Ø 6.24" to Ø 11.06"


Due to continuous product improvements, specification and/or equipment updates may change without notice.

DIMENSIONS (Continued)

DRS 4S LS12 G4 FSK - 4" Square

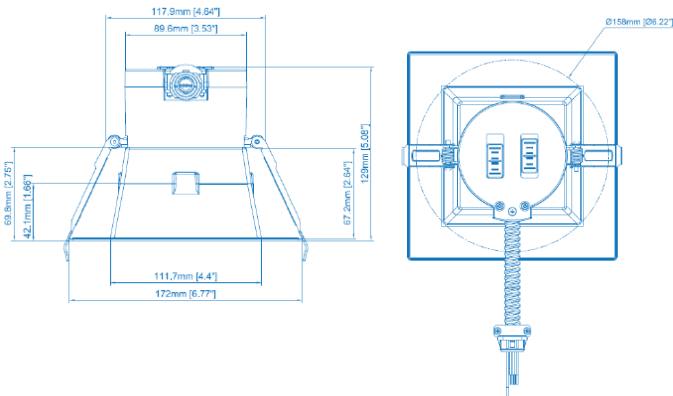


DRS 6S LS15 G4 FSK - 6" Square

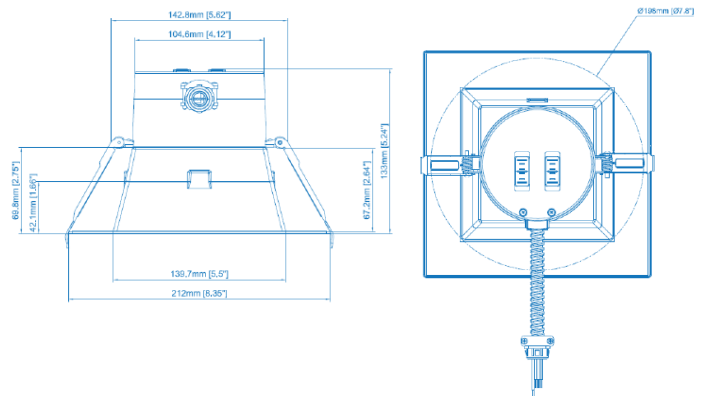

SHIPPING INFORMATION


DRS 4R LS15 G4 9FSK - @12W, 5000K CCT

DATA OF LAMP			PHOTOMETRIC DATA			Eff: 107.46 lm/W	
MODEL			I _{max} (cd)				
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/180)	1.16		
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1293.6	η UP, DN (C90/270)	1.15		
NOMINAL FLUX (lm)	1293.61	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.0		
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25		
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.25		

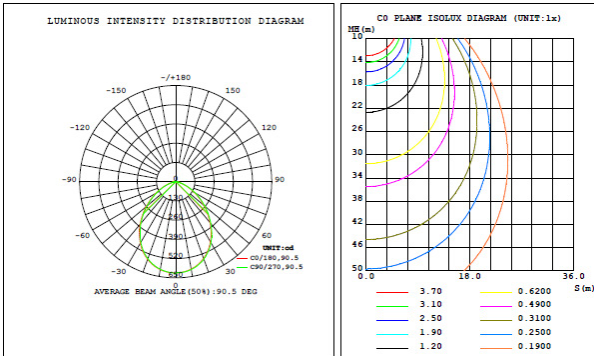


DRS 6R LS27 G4 9FSK - @30W, 5000K CCT

DATA OF LAMP			PHOTOMETRIC DATA			Eff: 103.98 lm/W	
MODEL			I _{max} (cd)				
NOMINAL POWER (W)	30	LOR (%)	100.0	S/MH (C90/180)	1.17		
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	3116.5	η UP, DN (C90/270)	1.18		
NOMINAL FLUX (lm)	3116.54	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.5		
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25		
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.30		

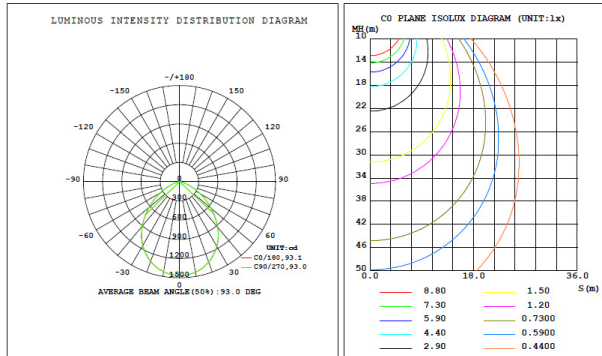


DRS 8R LS34 G4 9FSK - @25W, 5000K CCT

DATA OF LAMP			PHOTOMETRIC DATA			Eff: 106.00 lm/W	
MODEL			I _{max} (cd)				
NOMINAL POWER (W)	25	LOR (%)	100.0	S/MH (C90/180)	1.21		
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	2664.0	η UP, DN (C90/270)	1.20		
NOMINAL FLUX (lm)	2663.99	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.0		
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25		
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35		

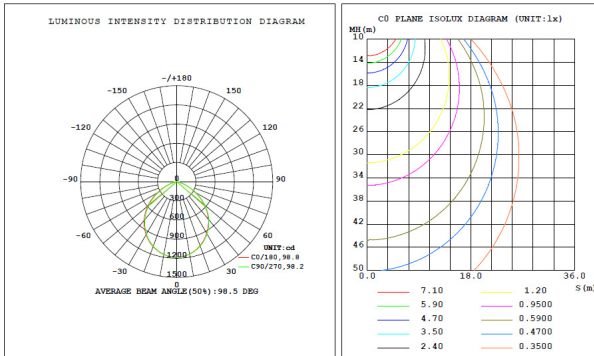

DRS 10R LS42 G4 9FSK - @36W, 5000K CCT

DATA OF LAMP			PHOTOMETRIC DATA			Eff: 105.29 lm/W	
MODEL			I _{max} (cd)				
NOMINAL POWER (W)	36	LOR (%)	100.0	S/MH (C90/180)	1.22		
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	3620.6	η UP, DN (C90/270)	1.21		
NOMINAL FLUX (lm)	3620.62	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.9		
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25		
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35		

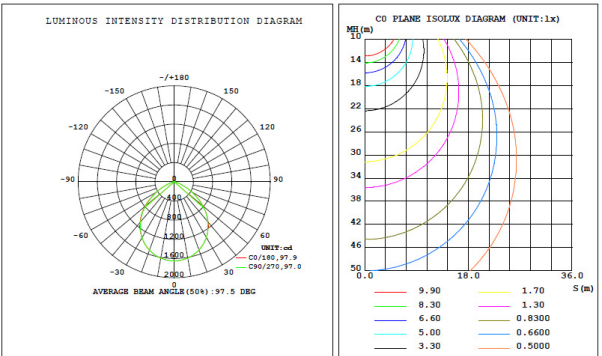

Due to continuous product improvements, specification and/or equipment updates may change without notice.

DIMMER COMPATIBILITY

No.	Brand	Model No.	Interface
1	Leviton	IP7 10-DLZ	0-10V
2	Lithonia/Synergy	ISD BC 120/277 WH	0-10V
3	Cooper	SF10P-W	0-10V
4	Lutron	DVSTV-WH	0-10V
5	HUBBELL	PSD710	0-10V
6	HUBBELL	RSD710Z	0-10V


Brand	Model No.	Wattage	Interface
Lutron	CTCL-153P-WH	150W	TRIAC
Lutron	S2-LH	300W	TRIAC
Lutron	DVCL-153P	150W	TRIAC
Legrand	HCL453PTCCCV6	450W	TRIAC
Synergy/Leviton	ISD 600 I 120 / IPI06	600W	TRIAC
Leviton	6633-PA	600W	TRIAC
Leviton	6631-PLW	600W	TRIAC
Leviton	IPL06-10Z	600W	Universal
Leviton	6674-POW	600W	Universal
Lutron	DVELV-300P-AL	300W	ELV
Lutron	NTELV-300-WH	300W	ELV
Lutron	SELV-300P	300W	ELV
Insteon	2477D	600W	ELV
HUBBELL	RSDE06	600W	ELV
Lutron	PD-5NE	150W	Wireless

SHIPPING INFORMATION

Product number	Individual box size	Master Carton Size	QTY Per Carton
DRS 4R LS15 G4 9FSK	7.09" X 7.09" X 4.82"	14.88" X 15.55" X 7.68"	6 PCS
DRS 6R LS15 G4 9FSK	9.53" X 9.53" X 5.28"	19.76" X 16.89" X 10.04"	6 PCS
DRS 8R LS15 G4 9FSK	11.18" X 11.18" X 5.67"	23.07" X 18.07" X 11.69"	6 PCS
DRS 10R LS15 G4 9FSK	12.48" X 12.48" X 5.98"	25.67" X 19.02" X 12.99"	6 PCS
DRS 4S LS12 G4 FSK	8.11" X 7.95" X 6.52"	20.59" X 16.61" X 8.62"	6 PCS
DRS 6S LS15 G4 FSK	9.65" X 6.59" X 9.45"	20.63" X 19.61" X 10.16"	6 PCS

Fixtures ship 1 per box and specific dimensions may change without notice due to improvements.

ACCESSORIES OVERVIEW



DE 3/4/6/8/10R HOUSING

New Construction Universal Housing for 4", 6", 8" and 10" Round Downlights



DRS 4/6/8R W G3

Round Wall Washer, available in 4", 6", and 8" sizes.




DT GR 4/6/8/10 W

Downlight Goof Ring 4", 6", 8", and 10" round fixtures.


Due to continuous product improvements, specification and/or equipment updates may change without notice.

GOOF RING DIMENSIONS


DT GR 4R W - 4" Round Goof Ring




DT GR 6R W - 6" Round Goof Ring



DT GR 8R W - 8" Round Goof Ring




DT GR 10R W - 10" Round Goof Ring




WALL WASH DIMENSIONS


DRS 4R W G3 - Wall Wash for 4" Round Downlights

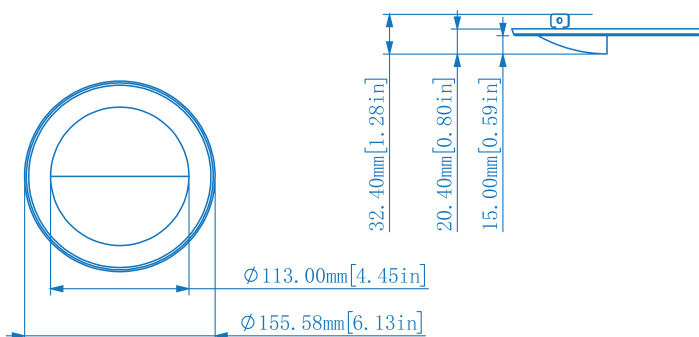

DRS 6R W G3 - Wall Wash for 6" Round Downlights

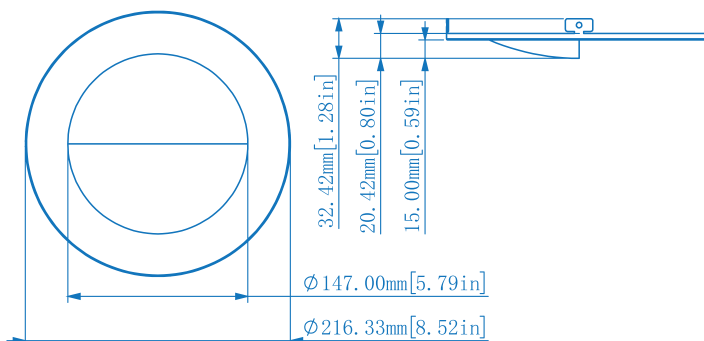

DRS 8R W G3 - Wall Wash for 8" Round Downlights

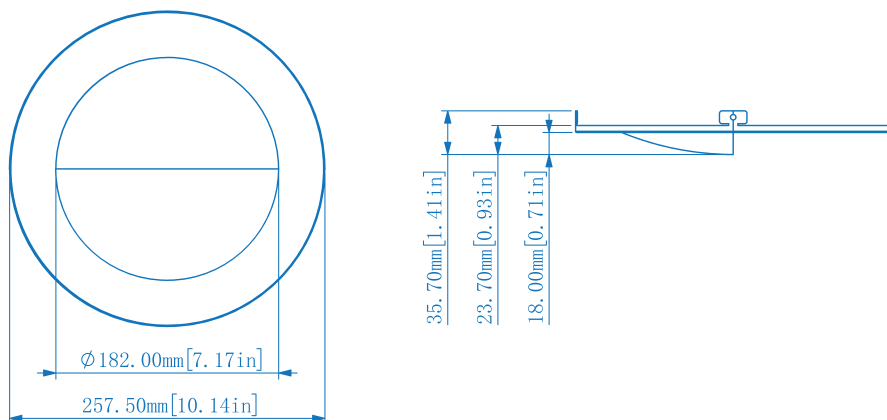

Due to continuous product improvements, specification and/or equipment updates may change without notice.

SAL M27

LED Slim Architectural Linear – 2.75" Thickness **DESIGN XP**


Indirect/Direct | Suspended/Surface/Wall Mounting

Due to continuous product improvements, specification and/or equipment updates may change without notice.

Project:
Catalog #:
Fixture Type:
Notes:



(Images are shown for illustration purposes only)

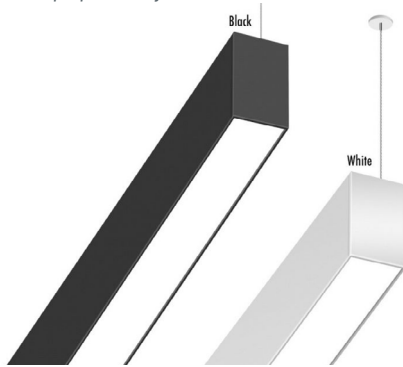

qty 6

SAL M27



Features:

- 2' - 4' - 8' Linear Fixture lengths
- Black and White finishes
- Suspended/Surface/Wall mounting available
- PC Frosted lens standard (additional options available)
- Indirect/Direct switch with selectable distribution
- Integrated plug-in connectors for sleek designs

Dimensions:
2.7" W x 3.15" H

Selectable CCT:
3000K 3500K 4000K

Connector Options:

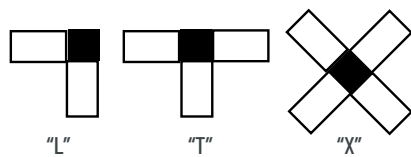

Fixture linking:


Max. linkable quantity				
Down Linear	2'	4'	8'	
AC120V	18	9	5	
AC277V	43	21	12	
Up / Down Linear	2'	4'	8'	
AC120V	12	7	3	
AC277V	28	17	8	

Linear can be gapless as long as needed using multiple power cables.


Fixture Information:

Series Number	Length	Switch Setting	Lumens	Wattage
SAL M27 2	2'	High	2,880 Lm	25 W
		Medium	2,300 Lm	20 W
		Low	1,760 Lm	15 W
SAL M27 4	4'	High	5,760 Lm	50 W
		Medium	4,600 Lm	40 W
		Low	3,520 Lm	30 W
SAL M27 8	8'	High	11,520 Lm	100 W
		Medium	9,200 Lm	80 W
		Low	7,040 Lm	60 W

Selectable Distribution:

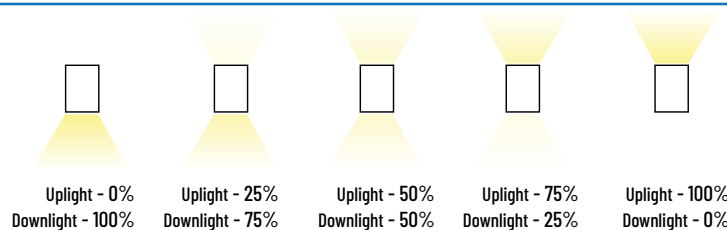

Distribution:



FIXTURE ORDERING GUIDE

Example: SAL M27 4 LS55 ID F G1 FSK W

Fixture	Width	Length	Selectable Lumen Output	Selectable Distribution	Lens	Generation	Voltage	Selectable CCT	Finish	Emergency Backup
• SAL Slim Architectural Linear	• M27 Medium 2.75"	• 2 2'	• LS28 2,880 Lm - 25W 2,300 Lm - 20W 1,760 Lm - 15W	• ID Internal Driver Uplight / Downlight - 0%/100% - 25%/75% - 50%/50% - 75%/25% - 100%/0%	• F Flat PC lens	• G1 Gen 1	• BLANK 120-277V	• FSK 3000K 3500K 4000K	• W White • B Black	• BLANK No backup. • EMA-DH08D-UNV-170* Emergency backup driver. • EMD-LS08D-UNV-055* Emergency backup driver.
			• LS55 5,760 Lm - 50W 4,600 Lm - 40W 3,520 Lm - 30W							
		• 4 4'								
		• 8 8'	• LS110 11,520 Lm - 100W 9,200 Lm - 80W 7,040 Lm - 60W							

*Not available for 2' fixture.

Performance Information

Series Number	Power Percentage	Lumens	Wattage	CCT
SAL M27 2 LS28	High	2,880 Lm	25 W	3000K/ 3500K/ 4000K
	Med	2,300 Lm	20 W	
	Low	1,760 Lm	15 W	
SAL M27 4 LS55	High	5,760 Lm	50 W	
	Med	4,600 Lm	40 W	
	Low	3,520 Lm	30 W	
SAL M27 8 LS110	High	11,520 Lm	100 W	
	Med	9,200 Lm	80 W	
	Low	7,040 Lm	60 W	

Lumen Distribution:

Low: 880 Lm per foot
Med: 1,150 Lm per foot
High: 1,440 Lm per foot

Specifications

Housing

One-piece extruded aluminum with PC end caps.

Mounting

Suspended, wall mount, & surface mount.

Efficacy

Up to 115 lumens per watt.

CCT and CRI

Field selectable: 3000K, 3500K, and 4000K.
CRI 80.

Lifespan

L70 >50,000 Hours at 25°C (77°F).

Lumen Output

Field selectable: 1,760 - 11,520 Lm.

Warranty

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

Electrical

Standard 120V - 277V
0-10V dimming standard with a dimming range of 100% to 10%. PF > 0.9. THD <20%.

Certifications

ETL Listed. Suitable for damp locations, indoor use only. FCC compliant. Design Lights Consortium® (DLC) 5.1 qualified product.

ACCESSORIES

OPTIONAL ACCESSORIES

Power Cable

Power Cable Set with Wire Nut
a Cable Tie - Max input 300V

MUST ORDER A POWER CABLE

WHITE FINISH

- **SAL-5C-KIT-W-7FT**
18 Gauge, 5 Conductors, White, 7 ft.
- **SAL-5C-KIT-W-12FT**
18 Gauge, 5 Conductors, White, 12 ft.
- **SAL-6C-KIT-W-12FT**
18 Gauge, 6 Conductors, White, 12 ft.

BLACK FINISH

- **SAL-5C-KIT-B-7FT**
18 Gauge, 5 Conductors, Black, 7 ft.
- **SAL-5C-KIT-B-12FT**
18 Gauge, 5 Conductors, Black, 12 ft.
- **SAL-6C-KIT-B-12FT**
18 Gauge, 6 Conductors, Black, 12 ft.

Connectors*

Fixture connector/splice box for fast connection of fixtures

- **SAL-M27-C-LC**
Straight run connector - buckle, metal finish

- **SAL-M27-C-WL**
"L" shaped connector/splice box for 2 fixtures - White finish
- **SAL-M27-C-WT**
"T" shaped connector/splice box for 3 fixtures - White finish
- **SAL-M27-C-WX**
"X" shaped connector/splice box for 4 fixtures - White finish

- **SAL-M27-C-BL**
"L" shaped connector/splice box for 2 fixtures - Black finish
- **SAL-M27-C-BT**
"T" shaped connector/splice box for 3 fixtures - Black finish
- **SAL-M27-C-BX**
"X" shaped connector/splice box for 4 fixtures - Black finish

*Not compatible with Surface Mount.

Illuminated Connectors

Illuminated joiners for seamless light connection

- **SAL-M27-C-WL-FSK**
L Joiner, 3000/3500/4000K CCT - White finish
- **SAL-M27-C-WT-FSK**
T Joiner, 3000/3500/4000K CCT - White finish
- **SAL-M27-C-WX**
X Joiner, 3000/3500/4000K CCT - White finish
- **SAL-M27-C-WY-FSK**
Y Joiner, 3000/3500/4000K CCT - White finish
- **SAL-M27-C-WV-FSK**
V Joiner, 3000/3500/4000K CCT - White finish

- **SAL-M27-C-BL-FSK**
"L" shaped connector/splice box for 2 fixtures - Black finish
- **SAL-M27-C-BT-FSK**
"T" shaped connector/splice box for 3 fixtures - Black finish
- **SAL-M27-C-BX-FSK**
"X" shaped connector/splice box for 4 fixtures - Black finish
- **SAL-M27-C-BY-FSK**
Y Joiner, 3000/3500/4000K CCT - Black finish
- **SAL-M27-C-BV-FSK**
V Joiner, 3000/3500/4000K CCT - Black finish

Optics

Easily swapped out from the standard PC lens

- **SAL-M27-RFL-32FT**
32" PC flat lens on a roll for seamless runs
- **SAL-M27-PAW-1FT**
Parabolic Lens - 1 ft - White Finish
- **SAL-M27-ECPAW**
Endcap for Parabolic lens - White
- **SAL-M27-PAB-1FT**
Parabolic Lens - 1 ft - Black Finish
- **SAL-M27-ECPAB**
Endcap for Parabolic lens - Black

- **SAL-M27-DLW-2FT**
Drop lens** - 2 ft - White Finish
- **SAL-M27-DLW-4FT**
Drop lens** - 4 ft - White
- **SAL-M27-DLW-8FT**
Drop lens** - 8 ft - White

- **SAL-M27-DLB-2FT**
Drop lens** - 2 ft - Black Finish
- **SAL-M27-DLB-4FT**
Drop lens** - 4 ft - Black
- **SAL-M27-DLB-8FT**
Drop lens** - 8 ft - Black

Optics

Includes all hardware

- **SAL-M27-LOW-2FT**
Louder Kit - 2 ft - White Finish
- **SAL-M27-LOW-4FT**
Louder Kit - 4 ft - White Finish
- **SAL-M27-LOW-8FT**
Louder Kit - 8 ft - White Finish
- **SAL-M27-LOB-2FT**
Louder Kit - 2 ft - Black Finish
- **SAL-M27-LOB-4FT**
Louder Kit - 4 ft - Black Finish
- **SAL-M27-LOB-8FT**
Louder Kit - 8 ft - Black Finish

**Drop Lens only available in suspended and surface mounts.

Controls

Control box

- **MSB-DCI-08-BT5.0**
Bluetooth sensor (requires control box)
- **SAL-M27-ECB-W**
External Control Box - White
- **SAL-M27-ECB-B**
External Control Box - Black

Down Metal Cover

For 100% Uplight applications

- **SAL-M27-DMC-W-2FT**
Down metal cover - White -2ft
- **SAL-M27-DMC-W-4FT**
Down metal cover - White -4ft
- **SAL-M27-DMC-B-2FT**
Down metal cover - Black -2ft
- **SAL-M27-DMC-B-4FT**
Down metal cover - Black -4ft

MOUNTING - KITS INCLUDE BRACKETS AND ALL HARDWARE NEEDED

Suspended

- **SAL-SC-KIT-7FT** Suspension Cable Kit - 7ft
- **SAL-SC-KIT-12FT** Suspension Cable Kit - 12ft

- **SAL-DW-KIT-W** Dry Wall Kit - White
- **SAL-DC-KIT-W** Drop Ceiling Kit - White

- **SAL-DW-KIT-B** Dry Wall Kit - Black
- **SAL-DC-KIT-B** Drop Ceiling Kit - Black

Suspension Cable Kit is mandatory for Dry Wall or Drop Ceiling Kits

Wall Mount

- **SAL-M27-WM-KIT-W-2FT**
Wall Mount Kit - White - 2ft
- **SAL-M27-WM-KIT-W-4FT**
Wall Mount Kit - White - 4ft
- **SAL-M27-WM-KIT-W-8FT**
Wall Mount Kit - White - 8ft

- **SAL-M27-WM-KIT-B-2FT**
Wall Mount Kit - Black - 2ft
- **SAL-M27-WM-KIT-B-4FT**
Wall Mount Kit - Black - 4ft
- **SAL-M27-WM-KIT-B-8FT**
Wall Mount Kit - Black - 8ft

Surface Mount

- **SAL-M27-SM-KIT-W-2FT**
Surface Mount Kit - White - 2ft
- **SAL-M27-SM-KIT-W-4FT**
Surface Mount Kit - White - 4ft
- **SAL-M27-SM-KIT-W-8FT**
Surface Mount Kit - White - 8ft

- **SAL-M27-SM-KIT-B-2FT**
Surface Mount Kit - Black - 2ft
- **SAL-M27-SM-KIT-B-4FT**
Surface Mount Kit - Black - 4ft
- **SAL-M27-SM-KIT-B-8FT**
Surface Mount Kit - Black - 8ft

Recessed Mount

- **SAL-M27-RM-DC-KIT**
Recessed Mount Kit - Drop ceilings
- **SAL-M27-RM-DW-KIT-2FT**
Recessed Mount Kit - Dry Wall ceilings
- **SAL-M27-RM-DW-KIT-4FT**
Recessed Mount Kit - Dry Wall ceilings
- **SAL-M27-RM-DW-KIT-8FT**
Recessed Mount Kit - Dry Wall ceilings

Dimensions


SAL M27 2



SAL M27 4




SAL M27 8




Joiner Dimensions

Non-Illuminated

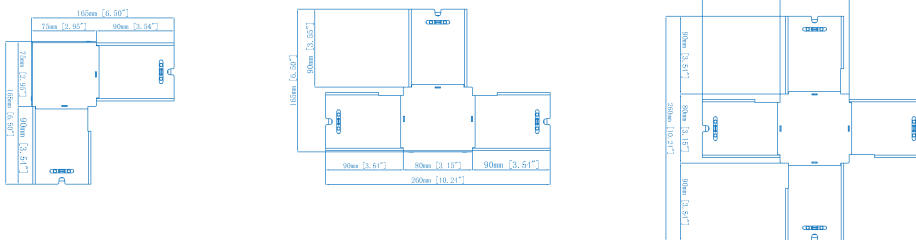

Illuminated

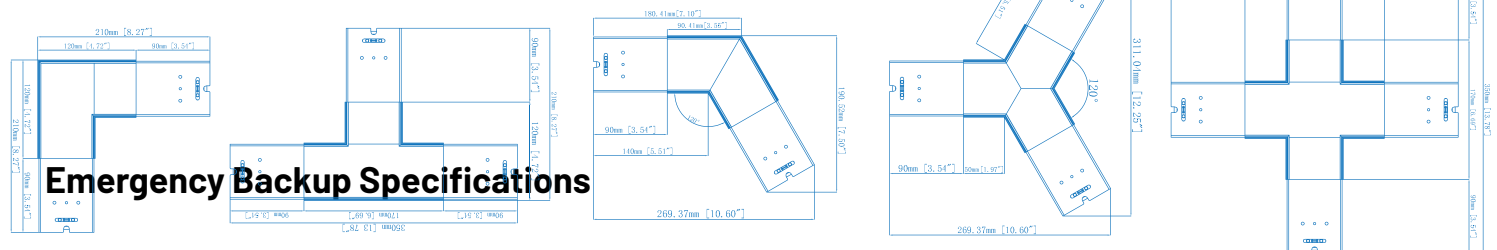

Emergency Backup Specifications

DLC ID Numbers

BRAND	MODEL
SAL M27 2 LS28 ID F G1 FSK	S-GJ8TD6
SAL M27 4 LS55 ID F G1 FSK	S-S53Q0F
SAL M27 8 LS110 ID F G1 FSK	S-W159LG

Luminaire Maintenance


SERIES	Ambient Temperature	L70
SAL M27 Series	25°C (77°F)	>50,000 Hours

Dimmer Compatibility

BRAND	MODEL
EATON	WBSD-010SLD
HUBBEL	LHDIRS3N
LEGRAND	RH4FBL3PTC

BRAND	MODEL
LEVITON	DS710
LEVITON	IP710-LFZ
LUTRON	DVS7V-WH
LUTRON	MS-Z101

Mounting

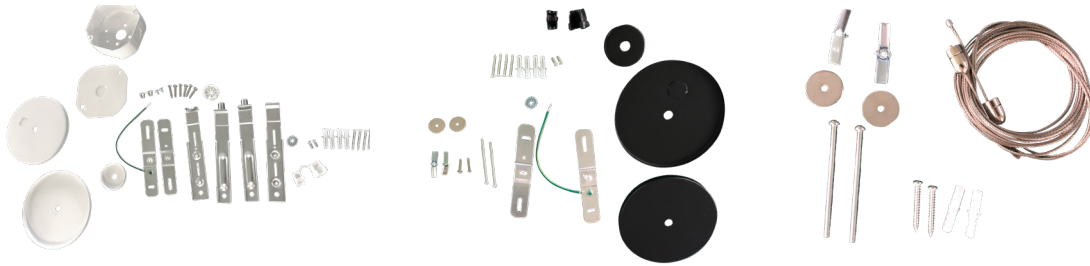


Drop Ceiling Suspension Kit

2 pcs 5" Slim Canopy with metal bracket
1 pc 1.7" Slim Canopy
1 pc Junction Box
2 pcs Grommet
2 pcs Washer
4 pcs Screws M4x8mm
2 pcs Assembled T-Grid Clips




Drywall Suspension Kit

2 pcs 5" Slim Canopy with metal bracket
1 pc 1.7" Slim Canopy
2 pcs Butterfly Drywall Anchor
2 pcs Grommet
2 pcs Washer
4 pcs Screws M4x8mm
Manual
PE bag

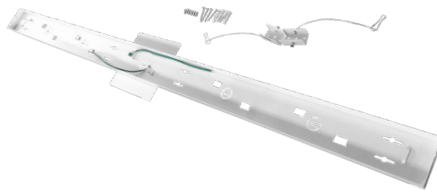

STB Suspension Kit

2 pcs 5" Aircraft Cable 6ft
2 pcs Butterfly Drywall Anchor
4 pcs Screws PA4x30mm
Manual

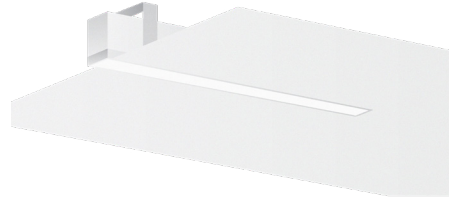

Wall Mount


(Includes wall bracket and hardware, available in black and white).

Surface Mount

(Includes surface bracket and hardware, available in Black and White)

Recessed Mount

(Includes surface bracket and hardware, available in 2, 4, and 8 ft lengths.

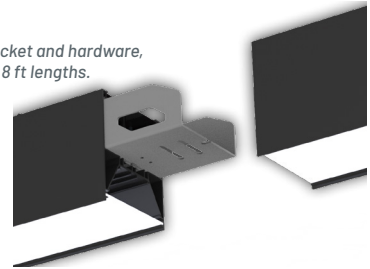


Connectors



T-Joiner

T-Shape metal splice, available in white & black.




L-Joiner

L-Shape metal splice, available in white & black.



X-Joiner

X-Shape metal splice, available in white & black.

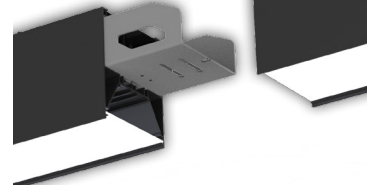

Buckle-Joiner

Straight metal buckle, available in white & black.

Illuminated Connectors



T-Joiner

T-Shape fixture splice, available in white & black.



L-Joiner

L-Shape fixture splice, available in white & black.



X-Joiner

X-Shape fixture splice, available in white & black.



Y-Joiner

Y-Shape fixture splice, available in white & black.



V-Joiner

V-Shape fixture splice, available in white & black.

(Images are shown for illustration purposes only)

Optics




PC Roll

32' of continuous PC flat lens on a roll or seamless runs.



Parabolic Lens

1ft parabolic lense, available in silver & black.



PC Louver Kit


Louver Kit, includes all hardware, available in white and black finishes and 2ft, 4ft, and 8ft lengths.



Drop Lens

Drop lens, includes all hardware, available in white and black finishes and 2ft, 4ft, and 8ft lengths.

Power Cable



Power Cable Kit

18 gauge, 5 conductors, available in white and black and 7ft / 12 ft lengths.

Down Metal Cover



Down Metal Cover

Metal cover, available in white and black finishes as well as 2ft and 4ft lengths.


Control Box




Control Box

External control box. Available in white and black finishes.

Design Pattern Samples

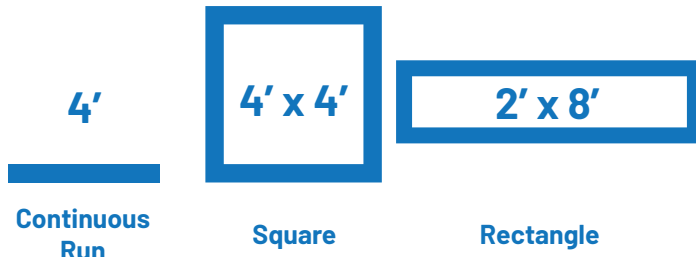


Connector Options:

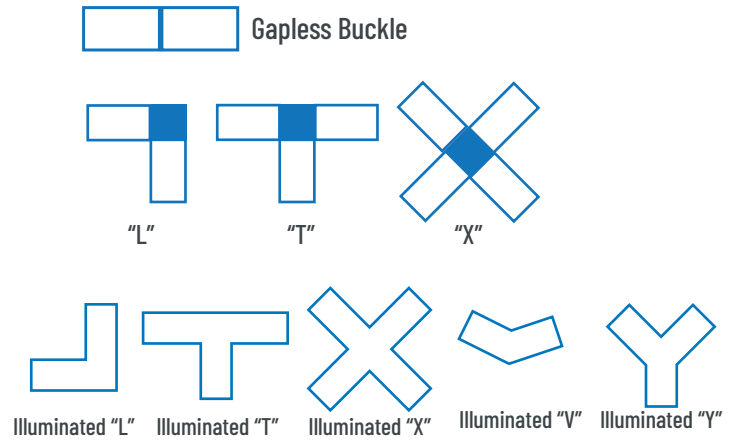

Layout Sketch

Layout sketch submittals are required for all custom designs.
Please use the grid below for your layout and include all relevant dimensions.

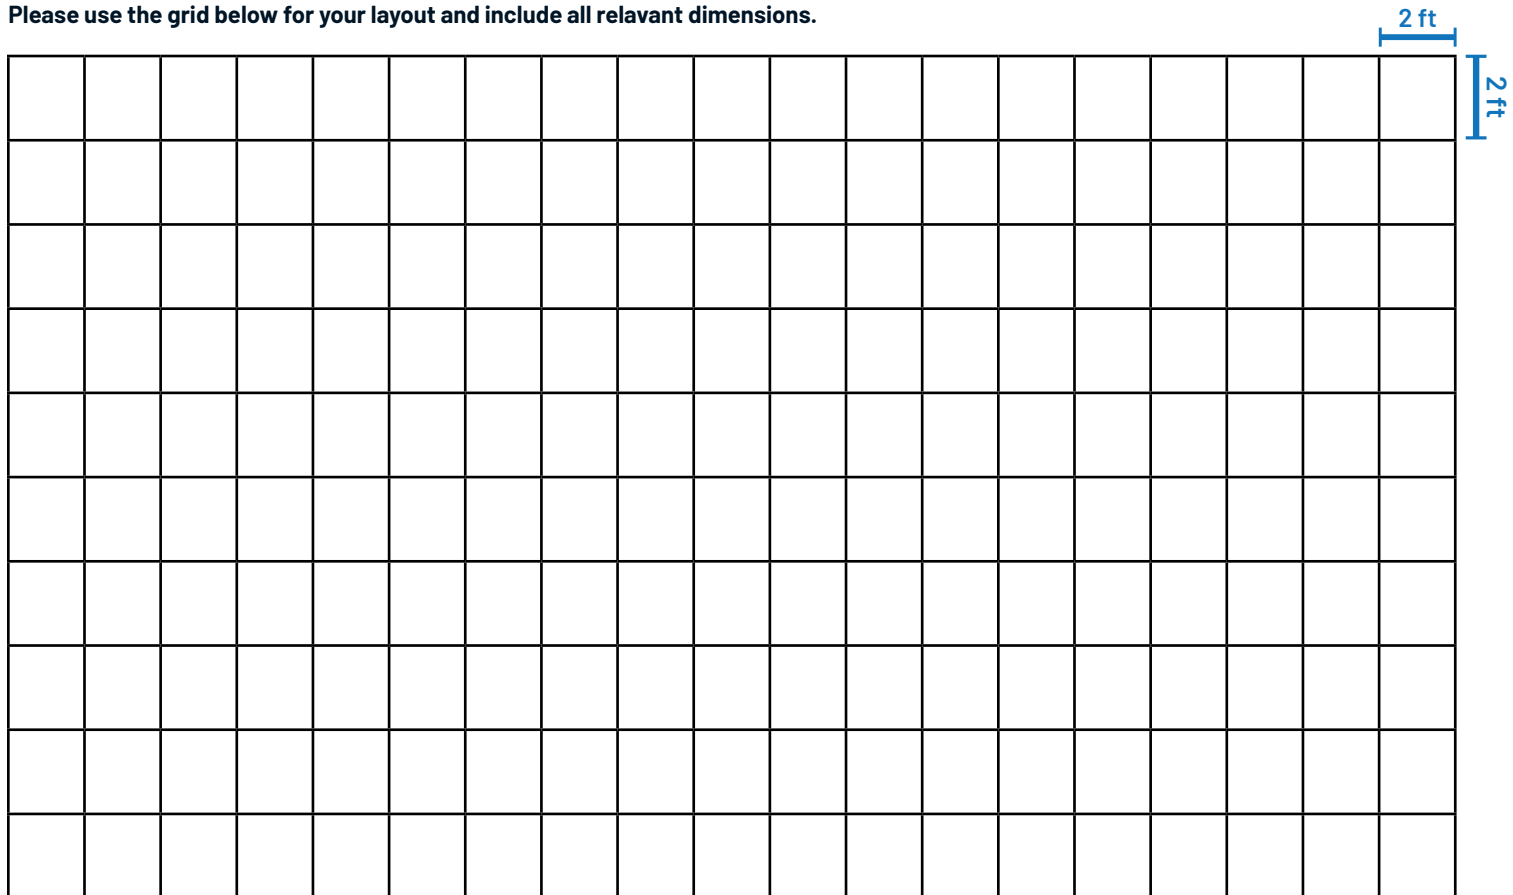

Electrical Load

	Power Setting	Wattage	Current (A)			
			120V	208V	240V	277V
SAL M27 2 LS28	Low	15 W	0.13	0.07	0.06	0.05
	Med	20 W	0.17	0.1	0.08	0.07
	High	25 W	0.21	0.12	0.10	0.09
SAL M27 4 LS55	Low	30 W	0.25	0.14	0.13	0.11
	Med	40 W	0.33	0.19	0.17	0.14
	High	50 W	0.42	0.24	0.21	0.18
SAL M27 8 LS110	Low	60 W	0.5	0.29	0.25	0.22
	Med	80 W	0.67	0.38	0.33	0.29
	High	100 W	0.83	0.48	0.42	0.36

Shipping Information

Product Number	Individual Box Size	Individual Box Weight	Outer Carton Size	Outer Carton Weight	# Per Carton	# Per Pallet
SAL M27 2 LS28 G1 FSK	4.1" x 4.7" x 26"	3.17 lbs (Net Weight) 3.59 lbs (Gross Weight)	9.25" x 10.2" x 26.8"	14.99 lbs (Net Weight) 17.53 (Gross Weight)	4	80
SAL M27 4 LS55 G1 FSK	4.7" x 4.1" x 29.2"	6.13 lbs (Net Weight) 6.83 lbs (Gross Weight)	9.25" x 10.2" x 50.4"	24.52 lbs (Net Weight) 29.59 lbs (Gross Weight)	4	72
SAL M27 8 LS110 G1 FSK	4.5" x 4.7" x 96.5"	12.04 lbs (Net Weight) 13.47 lbs (Gross Weight)	10.2" x 5.3" x 97.6"	24.07 lbs (Net Weight) 29.15 lbs (Gross Weight)	2	70

Controls



MSB-DCI-08-BT5.0

Input Voltage: DC 12V
 Input Current: 25mA Max
 Input Power: 0.3W
 Output Current: 10mA Max
 Output Power: 0.1W
 Dimming: Class 2, 0-10V DC 10mA Max
 Sinking Current: 10mA Max

Bluetooth Transmit: 100ft Max
 Radio Frequency: 2.4GHz ± 75MHz
 Bluetooth Version: 4.2
 Housing Material: UL 94-5VA
 Indoor Use Only
 Detection Range: 40ft Max
 Mounting Height: 18ft Max
 Operating Temperature: -30°C to 55°C,
 -22°F to 131°F
 Storage Temperature: -30°C to 85°C,
 -22°F to 185°F
 IP Rating: IP20
 Color: White
 Warranty: 5 years warranty

Commissioning

This Bluetooth sensor/controller is easily commissioned via the SLG Sync app, available for download on Google Play and the App Store.



App Download:



For commissioning guide and more information visit:

www.slgsync.com

Dimensions



TSRK

LED Strip - Controls Flexible Retrofit Kit Gen 1 **CONTRACTOR XP**

Due to continuous product improvements, specification and/or equipment updates may change without notice.



qty 43



TSRK 4 G1 - 4'

(Images are shown for illustration purposes only)

Controls Flexible

Built in BH4 receptacle with cap - no controls, eco-sensor, or Bluetooth sensor.

The **TSRK Strip Retrofit Kit** is a control experience LED strip light - designed to save you money, save you time, and install quickly. 9 fixtures in 1, this controls flexible fixture offers full lumen adjustable output and CCT color adjustable outputs. Bluetooth sensors plug-in easily with the BH4 built-in receptacle, giving you the greatest options available in an all-in-one fixture.

Catalog Number	Description	Lumens	Watts	CCT	Voltage
TSRK 4 LS62 G1 FSK	LED Strip - Retrofit Kit - 4' - Controls Flexible w/ BH4S receptacle	Selectable 3,300 - 6,200 Lm	Selectable 24 - 47 W	Selectable 3500K - 5000K	120V - 277V
TSRK 8 LS120 G1 FSK	LED Strip - Retrofit Kit - 8' - Controls Flexible w/ BH4S receptacle	Selectable 9,000 - 12,000 Lm	Selectable 65 - 90 W	Selectable 3500K - 5000K	120V - 277V

ORDERING GUIDE

Example: TSRK 4 LS62 G1 FSK

Fixture Type	Length	Adjustable Lumen Output	Generation	Voltage	Adjustable CCT	Finish	Controls Receptacle	Motion Sensor	Emergency Backup
• TSRK LED Strip - Retrofit Kit	• 4 4' Fixture	• LS62 6,200 Lm - 47 W 4,600 Lm - 34 W 3,300 Lm - 24 W	• G1 First Generation	• BLANK 120-277 V	• FSK 3500K - 5000K	• BLANK White	• BLANK BH4 Receptacle	• BLANK None • MSB-DCI-08-BH4S-BT5.0* Bluetooth Motion sensor • MS-DCI-06-BH4S Motion sensor • RM51 Remote commissioning tool for MS-DCI-06-BH4S	• BLANK None • EMD DH08D-UNV-055 Emergency Backup pre-installed
	• 8 8' Fixture	• LS120 12,000 Lm - 90 W 10,000 Lm - 75 W 9,000 Lm - 65 W							

*Factory install only, made to order. Cannot be field installed.

Performance Information

Series Number	Wattage	3500K		4000K		5000K	
		LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
TSRK 4 LS62	47 W	6,345 Lm	135 Lm/W	6,815 Lm	145 Lm/W	6,439 Lm	137 Lm/W
	34 W	4,828 Lm	142 Lm/W	5,168 Lm	152 Lm/W	4,896 Lm	144 Lm/W
	24 W	3,504 Lm	146 Lm/W	3,744 Lm	156 Lm/W	3,552 Lm	148 Lm/W
TSRK 8 LS120	90 W	11,970 Lm	133 Lm/W	12,870 Lm	143 Lm/W	12,150 Lm	135 Lm/W
	75 W	9,975 Lm	133 Lm/W	11,025 Lm	147 Lm/W	10,425 Lm	139 Lm/W
	65 W	9,165 Lm	141 Lm/W	9,815 Lm	151 Lm/W	9,295 Lm	143 Lm/W

Specifications

Housing and Lens

Sheet metal stamping, with frosted PC lens.

Ambient Temperature

Suitable for use in -20° C to 50° C (-4° F to 122° F).

Mounting

Mounting bracket (included).

Efficacy

Up to 156 lumens per watt.

CCT and CRI

Switch Selectable 3500K - 5000K, 80CRI

Lifespan

L70 > 100,000 at 25°C.

Lumen Output

Switch Selectable: 3,504 - 6,815 Lm (4 foot fixture).
9,165 - 12,870 Lm (8 foot fixture).

Warranty

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

Electrical

Standard 120V - 277V. 0-10V dimming.

Certifications


UL Listed for damp locations. FCC compliant. Design Lights Consortium® (DLC) 5.1 qualification listed for direct linear ambient luminaires. Design Lights Consortium® (DLC) Premium 5.1 qualification listed for low-bay and high-bay applications.

Luminaire Maintenance

Product Number	Ambient Temperature	L70
TSRK Series	25°C (77°F)	>100,000 Hours

Dimensions


TSRK 4

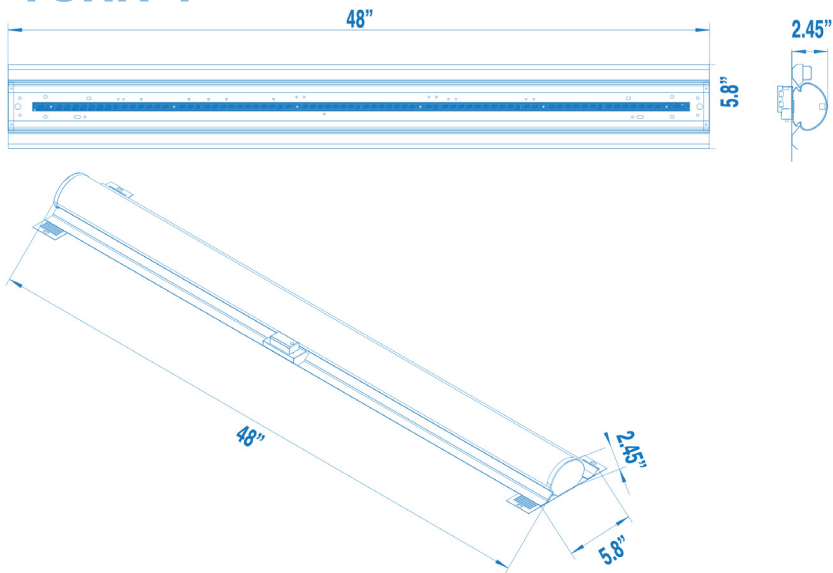


Retrofit bracket width range

Housing

4.25"-5.25"



TSRK 8

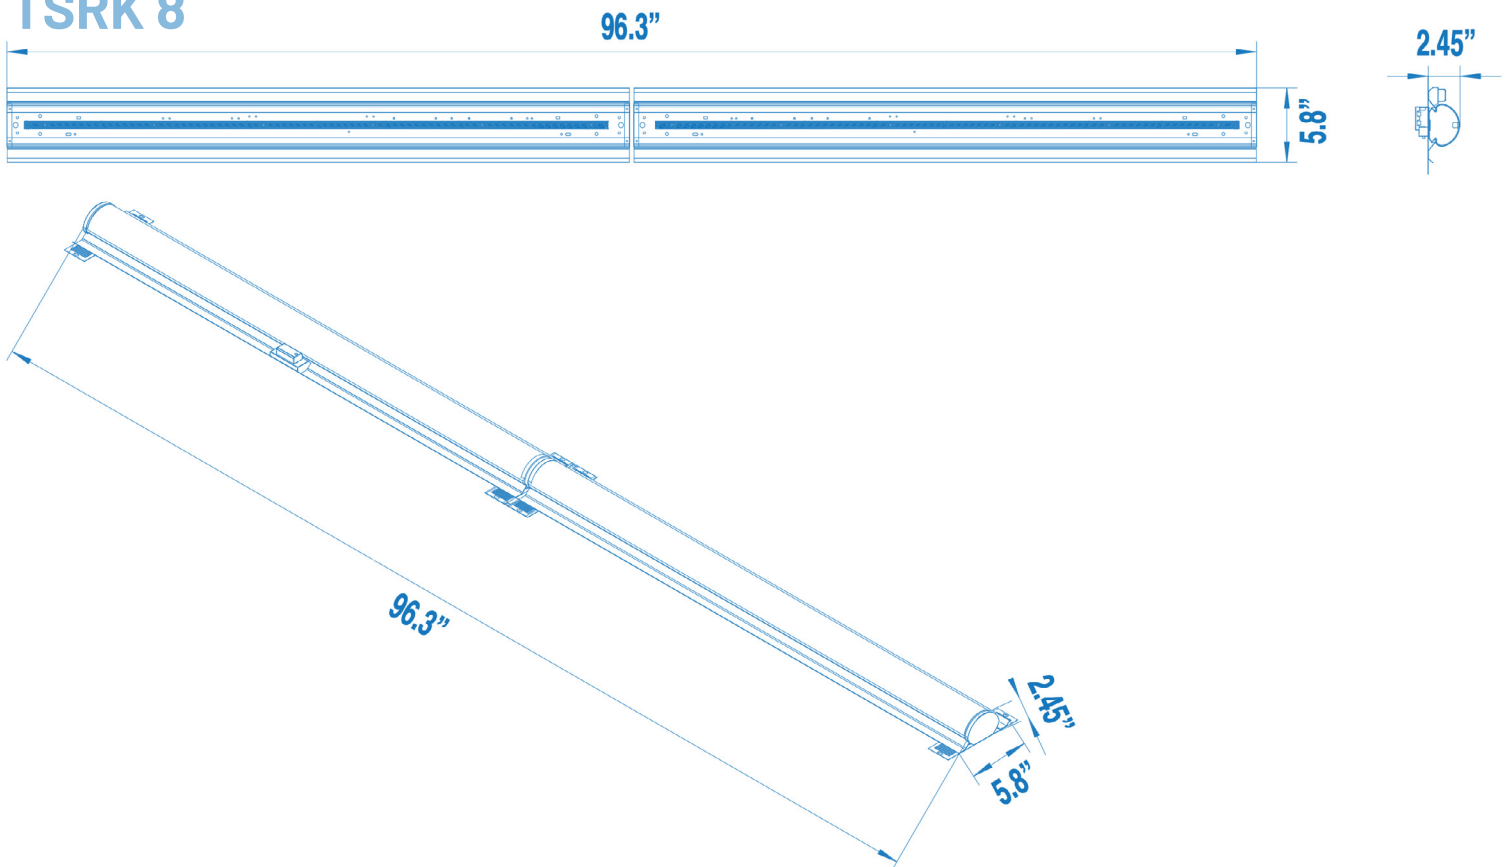

Networked Motion Sensor




MSB-DCI-08-BH4S-BT5.0

NOTE: Factory install only, made to order. Cannot be field installed.

- Input Voltage: DC 12V
- Input Current: 25mA Max
- Input Power: 0.3W
- Output Current: 10mA Max
- Output Power: 0.1W
- Dimming: Class 2, 0-10V DC 10mA Max
- Sinking Current: 10mA Max
- Bluetooth Transmit: 100ft Max
- Radio Frequency: 2.4GHz $\pm$ 75MHz
- Bluetooth Version: 5.0
- Housing Material: UL 94-5VA
- Indoor Use Only
- Detection Range: 40ft Max
- Mounting Height: 18ft Max
- Operating Temperature: -30°C to 55°C, -22°F to 131°F
- Storage Temperature: -30°C to 85°C, -22°F to 185°F
- IP Rating: IP20
- Color: White
- Warranty: 5 years warranty

Dimensions



Commissioning

This Bluetooth sensor/controller is easily commissioned via the SLG Sync app, available for download on Google Play and the App Store.

App Download:



Download on the App Store



GET IT ON Google Play



For commissioning guide and more information visit:

www.slgsync.com

Standalone Motion Sensor




MS-DCI-06-BH4S

Specifications


- Input Voltage**: DC 12V
- Input Current**: 9mA Max
- Input Power**: 0.1W
- Output Current**: 10A Max
- Output Power**: 0.1W
- Sinking Current**: 10mA Max
- Mounting Height**: 18ft Max
- IP Rating**: IP20
- Dimming**: 0-10V DC 10mA Max
- Detection Range**: 40 - 80 ft
- Operating Temperature**: -30°C to 65°C (-22°F to 149°F)
- Warranty**: 5 Year warranty

Dimensions

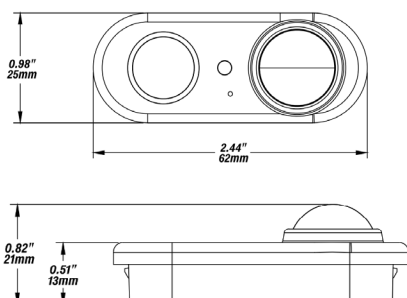


Commissioning

This basic sensor is commissioned via the RM51 remote. Either pre-commissioned or commissioned on site.

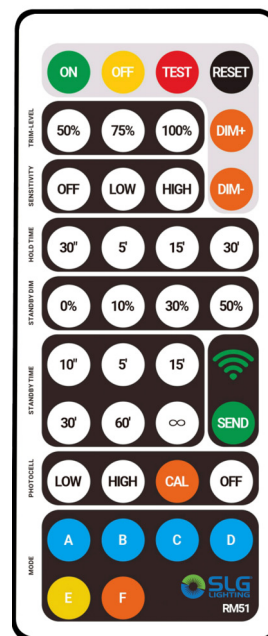

Emergency Backup

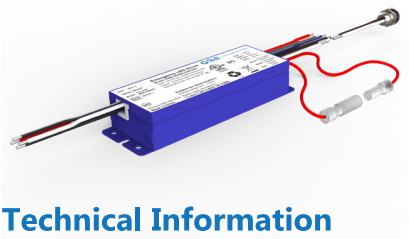

EMD DH08D-UNV-055

Technical Information

Type	Rated	Battery	Emergency power	Duration
EMD-DH08D-UNV-055	Input: 100-277V~,50-60Hz,50mA,4W,P.F>0.5 Output: DC20-55V, 8W Constant power Surge: 1KV(L-N) 2KV(L/N-PE)	Li-ion 7.4V 2.6Ah	8W (7.0-8.2)	90 minutes



TSS G1

LED Selectable Industrial Strip Gen 1

CONTRACTOR XP

Due to continuous product improvements, specification and/or equipment updates may change without notice.

Project:

Catalog #:


Fixture Type:

Notes:



Replaces up to 9 similar static luminaires.

qty 394

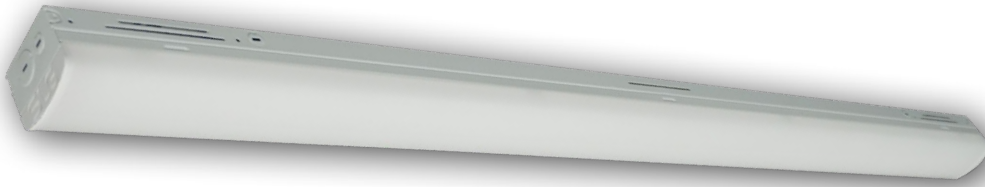

(Images are shown for illustration purposes only)

TSS G1

The **TSS LED Slim Industrial Strip** is a contractor series LED strip light that offers lumen and CCT selectable options in 4' and 8' sizes. The two-part housing design makes installation 70% faster and reduces accidents/damages. Emergency backup kit and multiple mounting options make the TSS your new "have-you-seen-this" option for strip lighting solutions.

Catalog Number	Description	Lumens	Watts	CCT	Voltage
TSS 2 20/25/30 G1 FSK	LED Selectable Slim Industrial Strip, 2 FT, CCT Selectable, White finish	Selectable 1,950 - 3,250 Lm	Selectable 15 - 25 W	Selectable 3500K - 5000K	120V - 277V
TSS 4 30/40/50 G1 FSK	LED Selectable Slim Industrial Strip, 4 FT, CCT Selectable, White finish	Selectable 3,120 - 5,200 Lm	Selectable 24 - 40 W	Selectable 3500K - 5000K	120V - 277V
TSS 8 60/80/100 G1 FSK	LED Selectable Slim Industrial Strip, 8 FT, CCT Selectable, White finish	Selectable 6,240 - 10,400 Lm	Selectable 48 - 80 W	Selectable 3500K - 5000K	120V - 277V
TSS 8 85 G1 4K	LED Static Slim Industrial Strip, 8 FT, 4000K CCT, White finish	8,450 Lm	85 W	4000K	120V - 277V

ORDERING GUIDE

Example: TSS 4 30/40/50 G1 FSK

Fixture Type	Size	Lumen Output	Generation	Voltage	Selectable CCT*	Finish	Emergency Backup	Accessories
• TSS LED Slim Industrial Strip	• 2 2ft	• 20/25/30 1,950 Lm / 15 W 2,600 Lm / 20 W 3,250 Lm / 25 W	• G1 First Generation	• BLANK 120-277 V	• FSK 3500K 4000K 5000K	• BLANK White	• BLANK None • EMD DH08D-UNV-055 Emergency Backup pre-installed	• BLANK None • MSB-ACE-04** Bluetooth Motion sensor and controller • L3 = Medium bay lens (max 50ft coverage) • L7 = High bay lens (max 80ft coverage) • MS-ACE-01** Motion sensor • L3 = Medium bay lens (max 50ft coverage) • L7 = High bay lens (max 80ft coverage) • TSS-VH00K 1 set of hooks (2 pcs) • TSC-CHAIN 1.05m chain set • SAC-1810 Strip aircraft cable • TSS-JBCVR J-Box cover and hardware • WG-TSS 4 G1 Wire guard (use 2 for TSS 8) • RC-TSS G1 Row connector
	• 4 4ft	• 30/40/50 3,120 Lm / 24 W 4,160 Lm / 32 W 5,200 Lm / 40 W						
	• 8 8ft	• 60/80/100 6,240 Lm / 48 W 8,320 Lm / 64 W 10,400 Lm / 80 W						

*TSS 4 ft and TSS 8ft also available in non-selectable options. **All sensors require separate lens adder (L3 or L7)

Performance Information

Series Number	Power Level	Lumens	Wattage	CCT
TSS 2 20/25/30 G1 FSK	High	3,250 Lm	25 W	3500K/ 4000K/5000K
	Medium	2,600 Lm	20 W	
	Low	1,950 Lm	15 W	
TSS 4 30/40/50 G1 FSK	High	5,200 Lm	40 W	
	Medium	4,160 Lm	32 W	
	Low	3,120 Lm	24 W	
TSS 8 60/80/100 G1 FSK	High	10,400 Lm	80 W	
	Medium	8,320 Lm	64 W	
	Low	6,240 Lm	48 W	
TSS 8 85 G1 4K		8,450 Lm	65 W	4000K

Specifications

Housing

Aluminum body.

Ambient Temperature

Suitable for use in -20°C to 50°C (-4°F to 122°F).

Mounting

Suspending and surface mounting options.

Lifespan

L70 > 100,000 Hours at 25°C.

Efficacy

Up to 130 lumens per watt.

CCT and CRI

Field selectable: 3500K, 4000K, and 5000K. Non selectable option: 4000K. CRI 80.

Lumen Output

Field selectable: 1950Lm - 3,250Lm (2ft), 3,120 - 5,200 Lm (4ft), 6,240 - 10,400 Lm (8ft).

Non-selectable: 4,550 Lm (4 ft) and 8,450 Lm (8ft).

Warranty

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

Electrical

Standard 120V - 277V

0-10V dimming standard with a dimming range of 100% to 10%.

Certifications


UL Listed. Design Lights Consortium® (DLC) Standard 5.1 qualified product. Rated for Damp Location.

DLC Product ID


TSS 2 20/25/30 G1 FSK	S-Y7MQ20
TSS 4 30/40/50 G1 FSK	S-0JQCXB
TSS 8 60/80/100 G1 FSK	S-7PDOFQ
TSS-8 85 G1 4K	S-K35V81

Dimensions


TSS 4 (2.5" x 4')



TSS 2 (2.8" x 2')



TSS 8 (2.5" x 8')

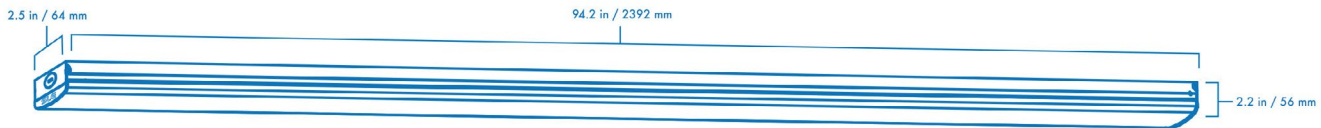

Mounting



TSS-JBCVR



TSC-CHAIN



SAC-1810



TSS-VHOOK



RC-TSS G1



WG-TSS 4 G1

J-Box cover and hardware.

1.05m chain, used with TSS-VHOOK or TSC-VHOOK

Strip aircraft cable.

Set of hooks (2 pcs)

Row connector.

Wire guard.

Emergency Backup



EMD DH08D-UNV-055

Technical Information

Type	Rated	Battery	Emergency power	Duration
EMD-DH08D-UNV-055	Input: 100-277V~, 50-60Hz, 50mA, 4W, P.F.>0.5 Output: DC20-55V, 8W Constant power Surge: 1KV(L-N) 2KV(L/N-PE)	Li-ion 7.4V 2.6Ah	8W (7.0-8.2)	90 minutes

Luminaire Maintenance

Product Number	Ambient Temperature	L70
TSS Series	25°C (77°F)	>100,000 Hours

Electrical Load


TSS Selectable Lumen/Watt

Watt	Current (A)			
	120V	208V	240V	277V
15W	0.125	0.07	0.06	0.05
20W	0.17	0.09	0.08	0.07
25W	0.21	0.12	0.10	0.09
24W	0.20	0.12	0.10	0.09
32W	0.27	0.15	0.13	0.12
40W	0.33	0.19	0.16	0.14
48W	0.40	0.23	0.20	0.17
64W	0.53	0.31	0.27	0.23
80W	0.67	0.38	0.34	0.29

TSS 4 and TSS 8 Static Lumen/Watt

Watt	Current (A)			
	120V	208V	240V	277V
35W	0.29	0.17	0.15	0.13
65W	0.54	0.31	0.27	0.23


Photometrics

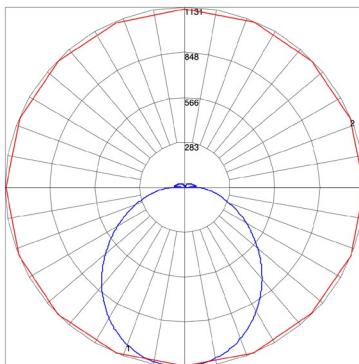

TSS 4 30/40/50 G1 FSK
 Lumen setting (30 - 3120 LM)
 CCT setting 3500K Wattage (24W)

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0-20	410.37	11.90	11.90
0-30	865.47	25.20	25.10
0-40	1403.46	40.80	40.80
0-60	2439.05	70.90	70.90
0-80	3092.66	89.90	89.90
0-90	3226.03	93.70	93.70
10-90	3119.46	90.70	90.60
20-40	993.09	28.90	28.90
20-50	1539.03	44.70	44.70
40-70	1424.36	41.40	41.40
60-80	653.62	19.00	19.00
70-80	264.85	7.70	7.70
80-90	133.36	3.90	.90
90-110	101.97	3.00	3.00
90-120	143.03	4.20	4.20
90-130	174.36	5.10	5.10
90-150	208.44	6.10	6.10
90-180	215.61	6.30	6.30
110-180	113.65	3.30	3.30
0-180	3441.64	100.00	100.00

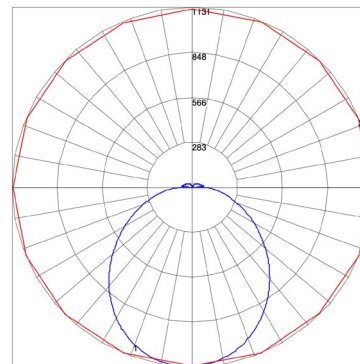


TSS 4 30/40/50 G1 FSK
 Lumen setting (30 - 3120 LM)
 CCT setting 3500K Wattage (24W)

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0-20	410.37	11.90	11.90
0-30	865.47	25.20	25.10
0-40	1403.46	40.80	40.80
0-60	2439.05	70.90	70.90
0-80	3092.66	89.90	89.90
0-90	3226.03	93.70	93.70
10-90	3119.46	90.70	90.60
20-40	993.09	28.90	28.90
20-50	1539.03	44.70	44.70
40-70	1424.36	41.40	41.40
60-80	653.62	19.00	19.00
70-80	264.85	7.70	7.70
80-90	133.36	3.90	.90
90-110	101.97	3.00	3.00
90-120	143.03	4.20	4.20
90-130	174.36	5.10	5.10
90-150	208.44	6.10	6.10
90-180	215.61	6.30	6.30
110-180	113.65	3.30	3.30
0-180	3441.64	100.00	100.00

Shipping Information



*Box render is for example purposes only.

Product number	Individual box size	Individual box weight	# per carton	Carton box size	Carton box weight
TSS 2	24" x 3" x 2.8"	-	6	22.7" x 2.6" x 3"	-
TSS 4	48" x 3" x 2.5"	4.3 lbs	9	48.5" x 9" x 8"	40.57 lbs
TSS 8	95" x 3" x 2.5"	8.49 lbs	4	96" x 6.5" x 5.5"	36.38 lbs

PG Select

LED Selectable Parking Garage Gen 3

PERFORMANCE XP

Due to continuous product improvements, specification and/or equipment updates may change without notice.




qty 15



(Images are shown for illustration purposes only)

PG Select

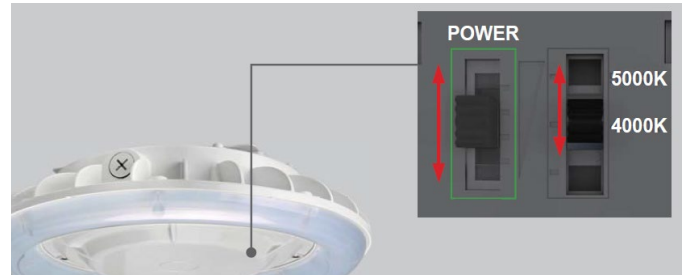

CCT Color and Lumen/Wattage Selectable Switches

The **PG G3 Selectable LED Parking Garage Light** is high-grade performance option for your security needs. A simple effective lighting solution that is guaranteed to be an A+ stocking solution offering 8 fixtures in 1 with 4 selectable power outputs and 2 selectable CCT options. Featuring a built-in plug-in receptacle, your lighting needs are covered conveniently with this LED parking garage light.

Catalog Number	Description	Lumens	Watts	CCT	Voltage
PG LS100 G3 FSK	PG Parking Garage, 4 Level Wattage Adjustable, Gen 3, CCT Selectable, White finish	Selectable 4,320 - 10,400 Lm	Selectable 32- 80 W	Selectable 4000K - 5000K	120V - 277V
PG LS100 G3 FSK-EMD-DH08D-UNV-055	PG Parking Garage, 4 Level Wattage Adjustable, Gen 2, CCT Selectable with Emergency Battery Backup, White finish	Selectable 4,320 - 10,400 Lm	Selectable 32- 80 W	Selectable 4000K - 5000K	120V - 277V

ORDERING GUIDE

Example: PG LS100 G3 FSK

Fixture Type	Selectable Lumen Output	Generation	Voltage	Selectable CCT	Finish	Emergency Backup	Accessories
• PG Parking Garage Light	• LS100 4,480 Lm / 32 W 6,580 Lm / 48 W 8,510 Lm / 64 W 10,400 Lm / 80 W	• G3 Third Generation	• BLANK 120-277 V	• FSK 4000K 5000K	• BLANK White	• BLANK None • EMD-DH08D-UNV-055 Emergency Backup pre-installed	• BLANK None • MS-DCE-09-L7 Motion Sensor • RM06 Remote for motion sensor

Performance Information

Series Number	Power Percentage	Wattage	4000K		5000K	
			LUMENS	LPW	LUMENS	LPW
PG LS100 G3	100%	80 W	10,400 Lm	130 Lm/W	10,000 Lm	125 Lm/W
	80%	64 W	8,510 Lm	133 Lm/W	8,200 Lm	128 Lm/W
	60%	48 W	6,580 Lm	137 Lm/W	6,350 Lm	132 Lm/W
	40%	32 W	4,480 Lm	140 Lm/W	4,320 Lm	135 Lm/W

Specifications

Housing

Durable sealed die-casting profile for indoor and outdoor applications.

Ambient Temperature

Suitable for use in -40° C to 45° C (-40° F to 113° F).

Mounting

Surface mount with J-Box and pendant installation with conduit.

Efficacy

Up to 140 lumens per watt.

CCT and CRI

Field selectable: 4000K and 5000K.
CRI 70.

Lifespan

L70 > 100,000 hrs. @25°C.

Lumen Output

Field selectable: 4,320 - 10,400 Lm.

Warranty

10-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.
5- year limited warranty for Emergency Driver models.

Electrical

Standard 120V - 277V

0-10V dimming standard with a dimming range of 100% to 10%.
PF>90%, THD <20%.

Certifications

UL Listed for wet locations. FCC compliant. Design Lights Consortium®(DLC) Premium 5.1 listed.


Emergency Backup

8W 1,000 Lm - 90 min.

TAA Compliant


This product is compliant with the "Trade Agreements Act".
Specific SKUs and models may vary, please confirm TAA compliance for every necessary order.

Dimensions PG Select

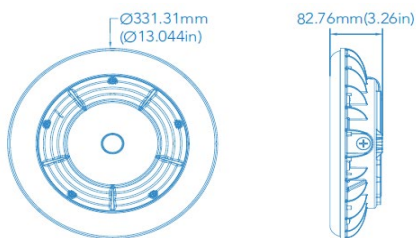

Net weight: 6.24 lbs

Photometric PG SELECT

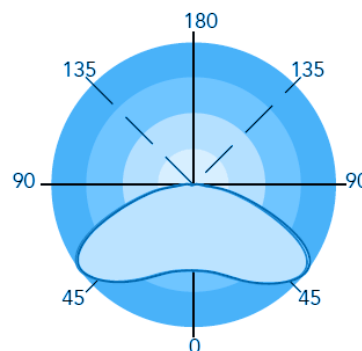

Emergency Backup Specs

INPUT

100 - 277V

OUTPUT

20-55 V DC

OUTPUT POWER

8 W

PG Select



Mounting



Surface Mounted With J-Box



Conduit Pendant Mount

Accessories



MS-DCE-09-L7

Specifications:

Input Voltage

DC 12V

Input Current

<30mA

Voltage Range

10 - 15VDC

Output Power

0.1W

Detection Angle

120°

IP Rating

IP65

Detection Range

≥ 9 ft

Mounting Height

Up to 40 ft

Dimming

0-10V

Operating Temperature

-20°C to 60°C (-4°F to 140°F)

Warranty

5 Year warranty

Commissioning

This basic sensor is commissioned via the RM06 remote.
Either pre-commissioned or commissioned on site.



Electrical Load

PG SELECT

Power Setting	Wattage	Current (A)			
		120V	208V	240V	277V
Low	32 W	0.27	0.15	0.13	0.12
Med	48 W	0.4	0.23	0.2	0.17
High	64 W	0.53	0.31	0.27	0.23
Max	80 W	0.67	0.39	0.33	0.29

DLC ID

Product Number	DLC ID
PG LS100 G3 FSK	S-TRW08P

Shipping Information



Product Number	Individual Box Size	Individual Box Weight	# Per Carton	Master Carton Size	Master Carton Weight	# Per Master Carton	# Per Pallet
PG LS100 G3 FSK	14" x 14" x 3.3"		1	28.7" x 14.6" x 11.2"	44.05 lbs	6	-
PG LS100 G3 FSK-EL	14" x 14" x 3.3"		1	28.7" x 14.6" x 11.2"	51.50 lbs	6	-

Bluetooth Sensor

Audio Jack Plugin Low Bay Sensor

Description:

This sensor provides coverage at heights up to 15 ft with a 32 ft detection range. Download our SLG Sync app on IOS/android for easy commissioning, convient controls, and a total lighting network experience.



MSB-DCE-08-TL25
White Finish

Features:

- Luminaire Level Lighting Control (LLLC) enabled with wireless bluetooth technology.
- User friendly commissioning with SLG Sync App (Available in IOS and Android).
- Local Bluetooth Network - no gateway needed.
- PIR and Daylight Harvesting motion sensor.
- Individual Addressability and/or Grouping
- Requires dim to off LED driver.
- Ability to create scenes for more customized dimming scenarios
- Time clock scheduling for individual lights, groups, or scenes
- Check www.slgus.com/slg-sync for SLG Lighting fixture compatibility.
- 5 Year Warranty

Ordering Information:

Sensor

Product Number	Description
MSB-DCE-08-TL25	Bluetooth Wireless motion sensor - low bay application - 2.5mm audio jack plugin

App Download:



Commissioning:

SLG Sync mobile App is the easiest way to pair devices, create groups, set scenes, set schedules, dimming, color tuning, and adjust high trim based on needs.

Visit www.slgus.com/slgsync for How-to-Videos and a comprehensive commissioning guide.



Specifications:

Input Voltage
DC 12V

Output Current
10mA Max

Bluetooth Transmit
100 ft. Max

Detection Range
32 ft (Max.)
16 ft for minor movement

Dimming
Class 2, 0-10V DC 10mA Max

Input Current
30mA Max

Output Power
0.1W

Radio Frequency
2.4 GHz +- 75 MHz

Mounting Height
15 ft (Max. recommended)

Operating Temperature
-30°C to 55°C (-22°F to 131°F)



Input Power
0.36W

Sinking Current
10mA Max


IP Rating
IP20

Warranty
5 Year warranty

Dimensions

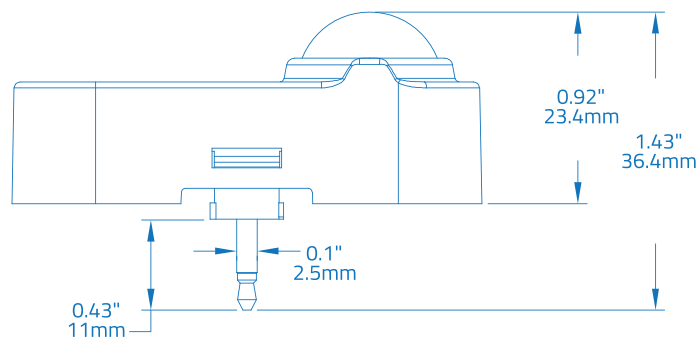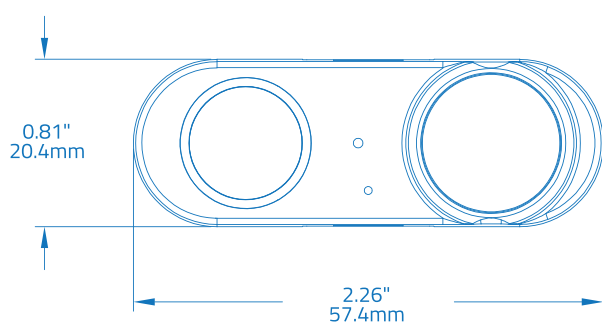


Wiring

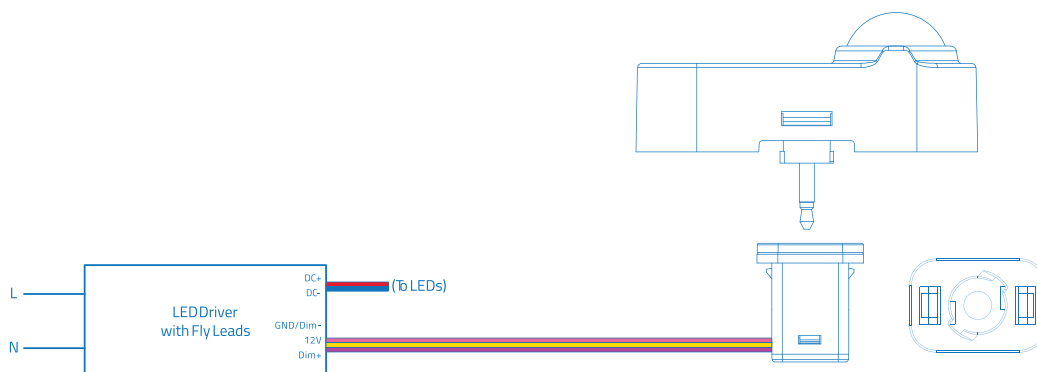

Coverage

CoverageSideView

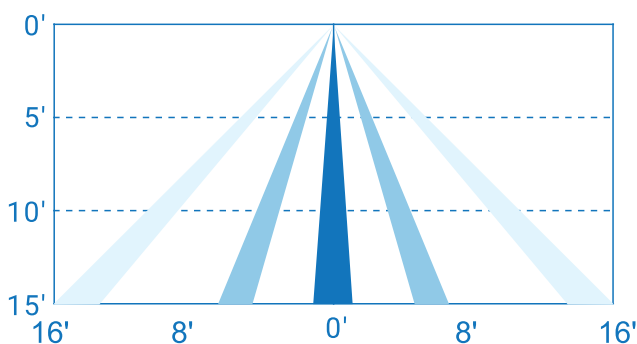

Coverage Top View

