



JUSTIN DOWNS
9511 S. Dorchester Chicago, IL 60628
(708) 489-0195
justin@pdcompanies.org

PRODUCTION DISTRIBUTION COMPANIES

CUSTOMER INFORMATION:

Company Name: **PALOS PARK METRA STATION**
Street Address:
City, State, Zip:
Contact:

MATERIAL LIST:

DESCRIPTION	PART NUMBER	QUANTITY	PRICE	EXT PRICE
LED 12 FT SUSPENDED FIXTURE	SAL M27 12 LS110 ID F G1	2		
LED WRAP	TSS 4 LS52 SR G2	1		
LED 2X4 PANEL	TPSC 24 LS52 G3 FSK	5		
LED 2X2 PANEL	TPSC 22 LS45 G3 FSK	4		
LED CANOPY	CSC LS1 G1 FSK	12		
LED FLOOD	FLF LS230 N77 G1 FSK PSC SFD	40		



SAL M27

LED Slim Architectural Linear – 2.75" Thickness **DESIGN XP**

Indirect/Direct | Suspended/Surface/Wall Mounting

Due to continuous product improvements, specification and/or equipment updates may change without notice.

Project:


Catalog #:

Fixture Type:

Notes:



(Images are shown for illustration purposes only)

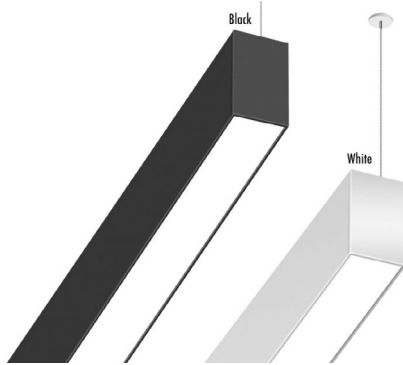

SAL M27

Features:

- 2' - 4' - 8' Linear Fixture lengths
- Black and White finishes
- Suspended/Surface/Wall mounting available
- PC Frosted lens standard (additional options available)
- Indirect/Direct with selectable distribution
- Integrated plug-in connectors for sleek designs

Dimensions:

2.7" W x 3.15" H

Selectable CCT:

3000K 3500K 4000K

Options:



Parabolic Lens



Louver Kits



Down Metal Cover

Fixture linking:

Max. linkable quantity				
Down Linear	2'	4'	8'	
AC120V	18	9	5	
AC277V	43	21	12	

Up / Down Linear	2'	4'	8'	
AC120V	12	7	3	
AC277V	28	17	8	

Linear can be gapless as long as needed using multiple power cables.

Fixture Information:

Series Number	Length	Switch Setting	Lumens	Wattage
SAL M27 2	2'	High	2,880 Lm	25 W
		Medium	2,300 Lm	20 W
		Low	1,760 Lm	15 W
SAL M27 4	4'	High	5,760 Lm	50 W
		Medium	4,600 Lm	40 W
		Low	3,520 Lm	30 W
SAL M27 8	8'	High	11,520 Lm	100 W
		Medium	9,200 Lm	80 W
		Low	7,040 Lm	60 W


Connector Options:




Gapless Buckle



"L"




"T"




"X"

Selectable Distribution:

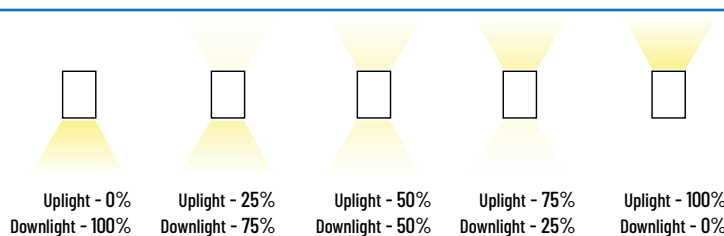

Distribution:



FIXTURE ORDERING GUIDE

Example: SAL M27 4 LS55 ID F G1 FSK W

Fixture	Width	Length	Selectable Lumen Output	Selectable Distribution	Lens	Generation	Voltage	Selectable CCT	Finish	Emergency Backup
• SAL Slim Architectural Linear	• M27 Medium 2.75"	• 2 2'	• LS28 2,880 Lm - 25W 2,300 Lm - 20W 1,760 Lm - 15W	• ID Internal Driver Uplight / Downlight - 0%/100% - 25%/75% - 50%/50% - 75%/25% - 100%/0%	• F Flat PC lens	• G1 Gen 1	• BLANK 120-277V	• FSK 3000K 3500K 4000K	• W White • B Black	• BLANK No backup. • EMD-PA08D-UNV-060* Emergency backup driver.
		• 4 4'	• LS55 5,760 Lm - 50W 4,600 Lm - 40W 3,520 Lm - 30W							
		• 8 8'	• LS110 11,520 Lm - 100W 9,200 Lm - 80W 7,040 Lm - 60W							

*Not available for 2' fixture.

ACCESSORIES

OPTIONAL ACCESSORIES

Power Cable

Power Cable Set with Wire Nut
a Cable Tie - Max input 300V

Connectors

Fixture connector/splice box for fast
connection of fixtures

Down Metal Cover

For 100% Uplight applications

Optics

Easily swapped out from the
standard PC lens

Optics

Includes all hardware

Controls

Control box

MUST ORDER A POWER
CABLE

- WHITE FINISH
- SAL-5C-KIT-W-7FT
18 Gauge, 5 Conductors,
White, 7 ft.
 - SAL-5C-KIT-W-12FT
18 Gauge, 5 Conductors, White,
12 ft.
 - SAL-6C-KIT-W-12FT
18 Gauge, 6 Conductors, White,
12 ft.

- BLACK FINISH
- SAL-5C-KIT-B-7FT
18 Gauge, 5 Conductors,
Black, 7 ft.
 - SAL-5C-KIT-B-12FT
18 Gauge, 5 Conductors, Black,
12 ft.
 - SAL-6C-KIT-B-12FT
18 Gauge, 6 Conductors, Black,
12 ft.

- SAL-M27-C-LC
Straight run connector - buckle, metal finish

- SAL-M27-C-WL
"L" shaped connector/splice box for 2
fixtures - White finish
- SAL-M27-C-WT
"T" shaped connector/splice box for 3
fixtures - White finish
- SAL-M27-C-WX
"X" shaped connector/splice box for 4
fixtures - White finish

- SAL-M27-C-BL
"L" shaped connector/splice box for 2
fixtures - Black finish
- SAL-M27-C-BT
"T" shaped connector/splice box for 3
fixtures - Black finish
- SAL-M27-C-BX
"X" shaped connector/splice box for 4
fixtures - Black finish

- SAL-M27-DMC-W-2FT
Down metal cover - White - 2ft
- SAL-M27-DMC-W-4FT
Down metal cover - White - 4ft

- SAL-M27-DMC-B-2FT
Down metal cover - Black - 2ft
- SAL-M27-DMC-B-4FT
Down metal cover - Black - 4ft

- SAL-M27-PAW-1FT
Parabolic Lens - 1 ft - White Finish
- SAL-M27-ECPAW
Endcap for Parabolic lens - White

- SAL-M27-PAB-1FT
Parabolic Lens - 1 ft - Black Finish
- SAL-M27-ECPAB
Endcap for Parabolic lens - Black

- SAL-M27-LOW-2FT
Louder Kit - 2 ft - White Finish
- SAL-M27-LOW-4FT
Louder Kit - 4 ft - White Finish
- SAL-M27-LOW-8FT
Louder Kit - 8 ft - White Finish

- SAL-M27-LOB-2FT
Louder Kit - 2 ft - Black Finish
- SAL-M27-LOB-4FT
Louder Kit - 4 ft - Black Finish
- SAL-M27-LOB-8FT
Louder Kit - 8 ft - Black Finish

- MSB-DCI-08-BT5.0
Bluetooth sensor (requires
control box) 
- SAL-M27-ECB-W
External Control Box - White
- SAL-M27-ECB-B
External Control Box - Black

MOUNTING - KITS INCLUDE BRACKETS AND ALL HARDWARE NEEDED

Suspended

- SAL-SC-KIT-7FT Suspension Cable Kit - 7ft
- SAL-SC-KIT-12FT Suspension Cable Kit - 12ft
- SAL-DW-KIT-W Dry Wall Kit - White
- SAL-DC-KIT-W Drop Ceiling Kit - White

- SAL-DW-KIT-B Dry Wall Kit - Black
- SAL-DC-KIT-B Drop Ceiling Kit - Black

**Suspension Cable Kit is
mandatory for Dry Wall or Drop
Ceiling Kits**

Wall Mount

- SAL-M27-WM-KIT-W-2FT
Wall Mount Kit - White - 2ft
- SAL-M27-WM-KIT-W-4FT
Wall Mount Kit - White - 4ft
- SAL-M27-WM-KIT-W-8FT
Wall Mount Kit - White - 8ft

- SAL-M27-WM-KIT-B-2FT
Wall Mount Kit - Black - 2ft
- SAL-M27-WM-KIT-B-4FT
Wall Mount Kit - Black - 4ft
- SAL-M27-WM-KIT-B-8FT
Wall Mount Kit - Black - 8ft

Surface Mount

- SAL-M27-SM-KIT-W-2FT
Surface Mount Kit - White - 2ft
- SAL-M27-SM-KIT-W-4FT
Surface Mount Kit - White - 4ft
- SAL-M27-SM-KIT-W-8FT
Surface Mount Kit - White - 8ft

- SAL-M27-SM-KIT-B-2FT
Surface Mount Kit - Black - 2ft
- SAL-M27-SM-KIT-B-4FT
Surface Mount Kit - Black - 4ft
- SAL-M27-SM-KIT-B-8FT
Surface Mount Kit - Black - 8ft

Performance Information

Series Number	Power Percentage	Lumens	Wattage	CCT
SAL M27 2 LS28	High	2,880 Lm	25 W	3000K/ 3500K/ 4000K
	Med	2,300 Lm	20 W	
	Low	1,760 Lm	15 W	
SAL M27 4 LS55	High	5,760 Lm	50 W	
	Med	4,600 Lm	40 W	
	Low	3,520 Lm	30 W	
SAL M27 8 LS110	High	11,520 Lm	100 W	
	Med	9,200 Lm	80 W	
	Low	7,040 Lm	60 W	

Lumen Distribution:

Low: 880 Lm per foot
Med: 1,150 Lm per foot
High: 1,440 Lm per foot

Specifications

Housing

One-piece extruded aluminum with PC end caps.

Mounting

Suspended, wall mount, & surface mount.

Efficacy

Up to 115 lumens per watt.

CCT and CRI

Field selectable: 3000K, 3500K, and 4000K.
 CRI 80.

Lumen Output

Field selectable: 1,760 – 11,520 Lm.

Warranty

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

Electrical

Standard 120V – 277V

0-10V dimming standard with a dimming range of 100% to 10%.

Certifications

ETL Listed. Suitable for damp locations, indoor use only. FCC compliant. Design Lights Consortium® (DLC) 5.1 qualified product.

Emergency Backup Specifications

Product Specification			
Input Voltage	100-347V AC, 50/60Hz	Output Voltage	30-60V DC
Input Current (Max)	100mA	Charging Current (Max)	250mA
Input Power (Max)	8 W	Output Power	8 W
Emergency Time	90 Minutes	Battery Type	Lithium ion battery
Charging Time	≥ 24 Hours	Ambient Temp	5°C - 50°C (41°F - 122°F)



EMD-PA08D-UNV-060*

*Not available for 2' fixture.

Dimmer Compatibility

BRAND	MODEL
EATON	WBSD-010SLD
HUBBEL	LHDIRS3N
LEGRAND	RH4FBL3PTC

BRAND	MODEL
LEVITON	DS710
LEVITON	IP710-LFZ
LUTRON	DVS7V-WH
LUTRON	MS-Z101

Dimensions


SAL M27 2




SAL M27 4



SAL M27 8




Mounting

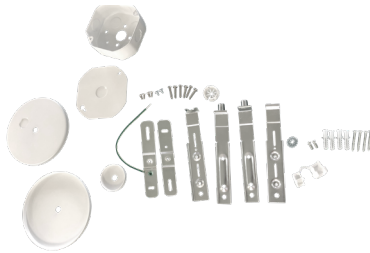


Drop Ceiling Suspension Kit

2 pcs 5" Slim Canopy with metal bracket
1 pc 1.7" Slim Canopy
1 pc Junction Box
2 pcs Grommet
2 pcs Washer
4 pcs Screws M4x8mm
2 pcs Assembled T-Grid Clips



Drywall Suspension Kit

2 pcs 5" Slim Canopy with metal bracket
1 pc 1.7" Slim Canopy
2 pcs Butterfly Drywall Anchor
2 pcs Grommet
2 pcs Washer
4 pcs Screws M4x8mm
Manual
PE bag

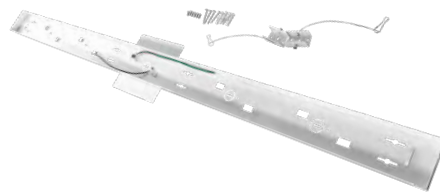

STB Suspension Kit

2 pcs 5" Aircraft Cable 6ft
2 pcs Butterfly Drywall Anchor
4 pcs Screws PA4x30mm
Manual

Wall Mount

(Includes wall bracket and hardware, available in black and white).

Surface Mount

(Includes surface bracket and hardware, available in Black and White)

Connectors



T-Joiner

T-Shape metal splice, available in white & black.




L-Joiner

L-Shape metal splice, available in white & black.



X-Joiner

X-Shape metal splice, available in white & black.

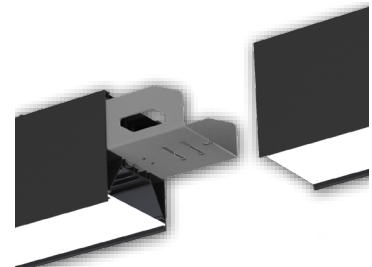

Buckle-Joiner


Straight metal buckle.

Optics



Parabolic Lens


1ft parabolic lense, available in silver & black.



PC Louver Kit

Louver Kit, includes all hardware, available in white and black finishes and 2ft, 4ft, and 8ft lengths.

Power Cable



Power Cable Kit

18 gauge, 5 conductors, available in white and black and 7ft / 12 ft lengths.

Down Metal Cover



Down Metal Cover

Metal cover, available in white and black finishes as well as 2ft and 4ft lengths.


Control Box




Control Box

External control box. Available in white and black finishes.

Design Pattern Samples

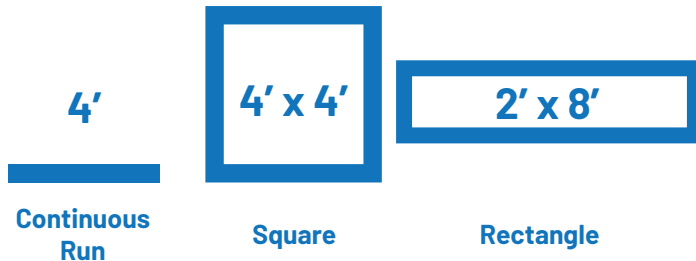


Connector Options:

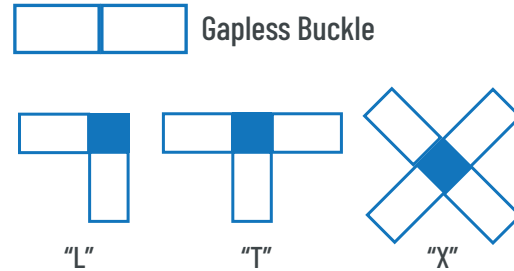

Layout Sketch

Layout sketch submittals are required for all custom designs.
Please use the grid below for your layout and include all relevant dimensions.

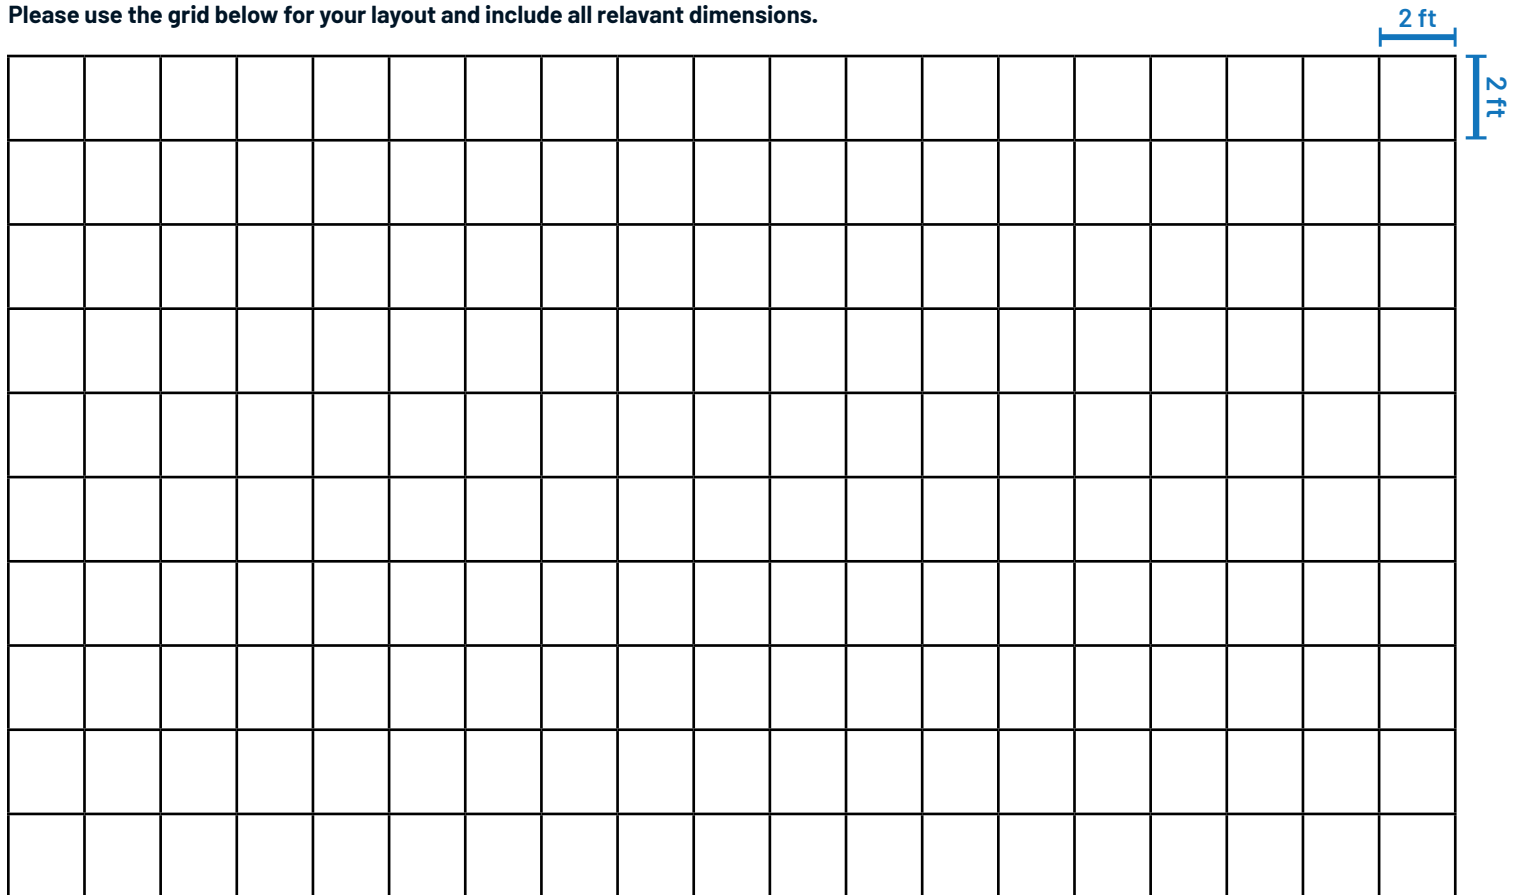

Electrical Load

	Power Setting	Wattage	Current (A)			
			120V	208V	240V	277V
SAL M27 2 LS28	Low	15 W	0.13	0.07	0.06	0.05
	Med	20 W	0.17	0.1	0.08	0.07
	High	25 W	0.21	0.12	0.10	0.09
SAL M27 4 LS55	Low	30 W	0.25	0.14	0.13	0.11
	Med	40 W	0.33	0.19	0.17	0.14
	High	50 W	0.42	0.24	0.21	0.18
SAL M27 8 LS110	Low	60 W	0.5	0.29	0.25	0.22
	Med	80 W	0.67	0.38	0.33	0.29
	High	100 W	0.83	0.48	0.42	0.36

Shipping Information

Product Number	Individual Box Size	Individual Box Weight	Outer Carton Size	Outer Carton Weight	# Per Carton	# Per Pallet
SAL M27 2 LS28 G1 FSK	4.1" x 4.7" x 26"	3.17 lbs (Net Weight) 3.59 lbs (Gross Weight)	9.25" x 10.2" x 26.8"	14.99 lbs (Net Weight) 17.53 (Gross Weight)	4	-
SAL M27 4 LS55 G1 FSK	4.7" x 4.1" x 29.2"	6.13 lbs (Net Weight) 6.83 lbs (Gross Weight)	9.25" x 10.2" x 50.4"	24.52 lbs (Net Weight) 29.59 lbs (Gross Weight)	4	-
SAL M27 8 LS110 G1 FSK	4.5" x 4.7" x 96.5"	12.04 lbs (Net Weight) 13.47 lbs (Gross Weight)	10.2" x 5.3" x 97.6"	24.07 lbs (Net Weight) 29.15 lbs (Gross Weight)	2	-

Controls



MSB-DCI-08-BT5.0

Input Voltage: DC 12V
 Input Current: 25mA Max
 Input Power: 0.3W
 Output Current: 10mA Max
 Output Power: 0.1W
 Dimming: Class 2, 0-10V DC 10mA Max
 Sinking Current: 10mA Max

Bluetooth Transmit: 100ft Max
 Radio Frequency: 2.4GHz ± 75MHz
 Bluetooth Version: 4.2
 Housing Material: UL 94-5VA
 Indoor Use Only
 Detection Range: 40ft Max
 Mounting Height: 18ft Max
 Operating Temperature: -30°C to 55°C,
 -22°F to 131°F
 Storage Temperature: -30°C to 85°C,
 -22°F to 185°F
 IP Rating: IP20
 Color: White
 Warranty: 5 years warranty

Commissioning

This Bluetooth sensor/controller is easily commissioned via the SLG Sync app, available for download on Google Play and the App Store.

App Download:



Download on the
App Store





GET IT ON
Google Play



For commissioning guide and more information visit:

www.slgsync.com

Dimensions




TSS G1

LED Selectable Industrial Strip Gen 1

CONTRACTOR XP

Due to continuous product improvements, specification and/or equipment updates may change without notice.

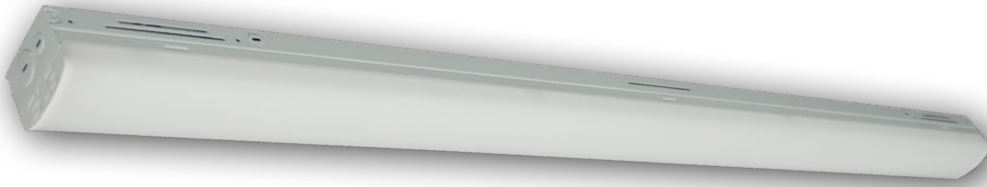

(Images are shown for illustration purposes only)

TSS G1

The **TSS LED Slim Industrial Strip** is a contractor series LED strip light that offers lumen and CCT selectable options in 4' and 8' sizes. The two-part housing design makes installation 70% faster and reduces accidents/damages. Emergency backup kit and multiple mounting options make the TSS your new "have-you-seen-this" option for strip lighting solutions.

Catalog Number	Description	Lumens	Watts	CCT	Voltage
TSS 2 20/25/30 G1 FSK	LED Selectable Slim Industrial Strip, 2 FT, CCT Selectable, White finish	Selectable 1,950 - 3,250 Lm	Selectable 15 - 25 W	Selectable 3500K - 5000K	120V - 277V
TSS 4 30/40/50 G1 FSK	LED Selectable Slim Industrial Strip, 4 FT, CCT Selectable, White finish	Selectable 3,120 - 5,200 Lm	Selectable 24 - 40 W	Selectable 3500K - 5000K	120V - 277V
TSS 8 60/80/100 G1 FSK	LED Selectable Slim Industrial Strip, 8 FT, CCT Selectable, White finish	Selectable 6,240 - 10,400 Lm	Selectable 48 - 80 W	Selectable 3500K - 5000K	120V - 277V
TSS 8 85 G1 4K	LED Static Slim Industrial Strip, 8 FT, 4000K CCT, White finish	8,450 Lm	85 W	4000K	120V - 277V

ORDERING GUIDE

Example: TSS 4 30/40/50 G1 FSK

Fixture Type	Size	Lumen Output	Generation	Voltage	Selectable CCT*	Finish	Emergency Backup	Accessories
• TSS LED Slim Industrial Strip	• 2 ft	• 20/25/30 1,950 Lm / 15 W 2,600 Lm / 20 W 3,250 Lm / 25 W	• G1 First Generation	• BLANK 120-277 V	• FSK 3500K 4000K 5000K	• BLANK White	• BLANK None • EMD DH08D-UNV-055 Emergency Backup pre-installed	• BLANK None • MSB-ACE-04** Bluetooth Motion sensor and controller • L3 = Medium bay lens (max 50ft coverage) • L7 = High bay lens (max 80ft coverage) • MS-ACE-01** Motion sensor • L3 = Medium bay lens (max 50ft coverage) • L7 = High bay lens (max 80ft coverage) • TSS-VHOOK 1 set of hooks (2 pcs) • TSC-CHAIN 1.05m chain set • SAC-1810 Strip aircraft cable • TSS-JBCVR J-Box cover and hardware • WG-TSS 4 G1 Wire guard (use 2 for TSS 8) • RC-TSS G1 Row connector
	• 4 ft	• 30/40/50 3,120 Lm / 24 W 4,160 Lm / 32 W 5,200 Lm / 40 W						
	• 8 ft	• 60/80/100 6,240 Lm / 48 W 8,320 Lm / 64 W 10,400 Lm / 80 W						

*TSS 4 ft and TSS 8 ft also available in non-selectable options. **All sensors require separate lens adder (L3 or L7)

Performance Information

Series Number	Power Level	Lumens	Wattage	CCT
TSS 2 20/25/30 G1 FSK	High	3,250 Lm	25 W	3500K/ 4000K/5000K
	Medium	2,600 Lm	20 W	
	Low	1,950 Lm	15 W	
TSS 4 30/40/50 G1 FSK	High	5,200 Lm	40 W	
	Medium	4,160 Lm	32 W	
	Low	3,120 Lm	24 W	
TSS 8 60/80/100 G1 FSK	High	10,400 Lm	80 W	
	Medium	8,320 Lm	64 W	
	Low	6,240 Lm	48 W	
TSS 8 85 G1 4K		8,450 Lm	65 W	4000K

Specifications

Housing

Aluminum body.

Ambient Temperature

Suitable for use in -20°C to 50°C (-4°F to 122°F).

Mounting

Suspending and surface mounting options.

Lifespan

L70 > 100,000 Hours at 25°C.

Efficacy

Up to 130 lumens per watt.

CCT and CRI

Field selectable: 3500K, 4000K, and 5000K. Non selectable option: 4000K. CRI 80.

Lumen Output

Field selectable: 1950Lm - 3,250Lm (2ft), 3,120 - 5,200 Lm (4ft), 6,240 - 10,400 Lm (8ft).

Non-selectable: 4,550 Lm (4 ft) and 8,450 Lm (8ft).

Warranty

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

Electrical

Standard 120V - 277V

0-10V dimming standard with a dimming range of 100% to 10%.

Certifications


UL Listed. Design Lights Consortium® (DLC) Standard 5.1 qualified product. Rated for Damp Location.

DLC Product ID


TSS 2 20/25/30 G1 FSK	S-Y7MQ20
TSS 4 30/40/50 G1 FSK	S-0JQCXB
TSS 8 60/80/100 G1 FSK	S-7PDOFQ
TSS-8 85 G1 4K	S-K35V81

Dimensions


TSS 4 (2.5" x 4')



TSS 2 (2.8" x 2')



TSS 8 (2.5" x 8')

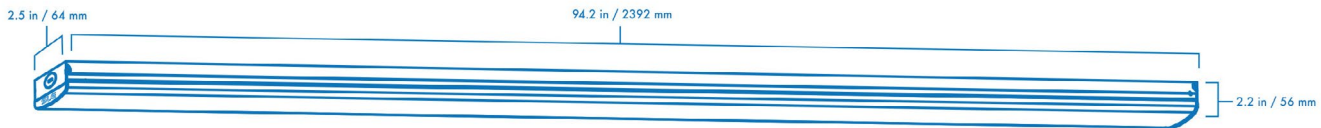

Mounting



TSS-JBCVR



TSC-CHAIN



SAC-1810



TSS-VHOOK



RC-TSS G1



WG-TSS 4 G1

J-Box cover and hardware.

1.05m chain, used with TSS-VHOOK or TSC-VHOOK

Strip aircraft cable.

Set of hooks (2 pcs)

Row connector.

Wire guard.

Emergency Backup



EMD DH08D-UNV-055

Technical Information

Type	Rated	Battery	Emergency power	Duration
EMD-DH08D-UNV-055	Input: 100-277V~,50-60Hz,50mA,4W,P.F>0.5 Output: DC20-55V, 8W Constant power Surge: 1KV(L-N) 2KV(L/N-PE)	Li-ion 7.4V 2.6Ah	8W (7.0-8.2)	90 minutes

Luminaire Maintenance

Product Number	Ambient Temperature	L70
TSS Series	25°C (77°F)	>100,000 Hours

Electrical Load


TSS Selectable Lumen/Watt

Watt	Current (A)			
	120V	208V	240V	277V
15W	0.125	0.07	0.06	0.05
20W	0.17	0.09	0.08	0.07
25W	0.21	0.12	0.10	0.09
24W	0.20	0.12	0.10	0.09
32W	0.27	0.15	0.13	0.12
40W	0.33	0.19	0.16	0.14
48W	0.40	0.23	0.20	0.17
64W	0.53	0.31	0.27	0.23
80W	0.67	0.38	0.34	0.29

TSS 4 and TSS 8 Static Lumen/Watt

Watt	Current (A)			
	120V	208V	240V	277V
35W	0.29	0.17	0.15	0.13
65W	0.54	0.31	0.27	0.23


Photometrics

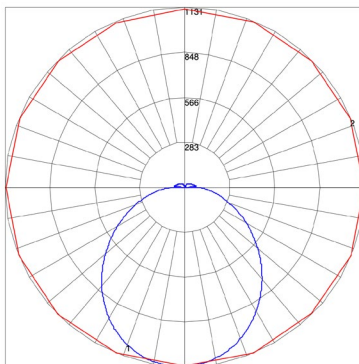

TSS 4 30/40/50 G1 FSK
 Lumen setting (30 - 3120 LM)
 CCT setting 3500K Wattage (24W)

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0-20	410.37	11.90	11.90
0-30	865.47	25.20	25.10
0-40	1403.46	40.80	40.80
0-60	2439.05	70.90	70.90
0-80	3092.66	89.90	89.90
0-90	3226.03	93.70	93.70
10-90	3119.46	90.70	90.60
20-40	993.09	28.90	28.90
20-50	1539.03	44.70	44.70
40-70	1424.36	41.40	41.40
60-80	653.62	19.00	19.00
70-80	264.85	7.70	7.70
80-90	133.36	3.90	.90
90-110	101.97	3.00	3.00
90-120	143.03	4.20	4.20
90-130	174.36	5.10	5.10
90-150	208.44	6.10	6.10
90-180	215.61	6.30	6.30
110-180	113.65	3.30	3.30
0-180	3441.64	100.00	100.00

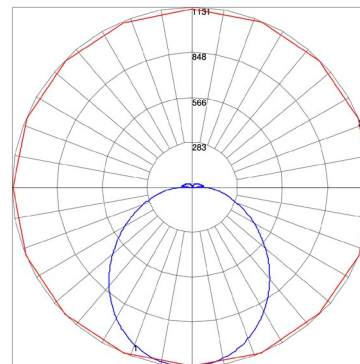


TSS 4 30/40/50 G1 FSK
 Lumen setting (30 - 3120 LM)
 CCT setting 3500K Wattage (24W)

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0-20	410.37	11.90	11.90
0-30	865.47	25.20	25.10
0-40	1403.46	40.80	40.80
0-60	2439.05	70.90	70.90
0-80	3092.66	89.90	89.90
0-90	3226.03	93.70	93.70
10-90	3119.46	90.70	90.60
20-40	993.09	28.90	28.90
20-50	1539.03	44.70	44.70
40-70	1424.36	41.40	41.40
60-80	653.62	19.00	19.00
70-80	264.85	7.70	7.70
80-90	133.36	3.90	.90
90-110	101.97	3.00	3.00
90-120	143.03	4.20	4.20
90-130	174.36	5.10	5.10
90-150	208.44	6.10	6.10
90-180	215.61	6.30	6.30
110-180	113.65	3.30	3.30
0-180	3441.64	100.00	100.00

Shipping Information



*Box render is for example purposes only.

Product number	Individual box size	Individual box weight	# per carton	Carton box size	Carton box weight
TSS 2	24" x 3" x 2.8"	-	6	22.7" x 2.6" x 3"	-
TSS 4	48" x 3" x 2.5"	4.3 lbs	9	48.5" x 9" x 8"	40.57 lbs
TSS 8	95" x 3" x 2.5"	8.49 lbs	4	96" x 6.5" x 5.5"	36.38 lbs

TPSC G1

LED Selectable Panel Gen 1 **CONTROL XP**

Due to continuous product improvements, specification and/or equipment updates may change without notice.

Project:

Catalog #:

Fixture Type:

Notes:



The **TPSC Series** transforms your options in an LED backlit panel with embedded controls options and sku-saving switch selectable power/CCT outputs. The built-in controls receptacle gives your customers a “controls today” or “controls tomorrow” flexibility and a simple plugin motion sensor option to make installation easy. Available in 1' x 4', 2' x 2', or 2' x 4' sizes, this panel series is ready for quick quotes on projects giving you the freedom to bid more jobs.

Catalog Number	Description	Lumens	Watts	CCT	Voltage
TPSC 14 LS45 G1FSK	LED Selectable Backlit Panel - 1'x4' with built in 2.5 mm receptacle	Selectable 2,750 - 4,450 Lm	Selectable 25 - 40W	Selectable 3500K - 5000K	120V - 277V
TPSC 22 LS45 G1FSK	LED Selectable Backlit Panel - 2'x2' with built in 2.5 mm receptacle	Selectable 2,750 - 4,450 Lm	Selectable 25 - 40W	Selectable 3500K - 5000K	120V - 277V
TPSC 24 LS55 G1FSK	LED Selectable Backlit Panel - 2'x4' with built in 2.5 mm receptacle	Selectable 3,300 - 5,500 Lm	Selectable 30 - 50W	Selectable 3500K - 5000K	120V - 277V

ORDERING GUIDE

Example: TPSC 22 LS45 G1 FSK

Fixture Type	Size	Selectable Lumen Output	Generation	Voltage	Selectable CCT	Finish	Options - Emergency Backup	Options - Controls	Options - Accessories
• TPSC Selectable Backlit Panel	• 14 1' x 4'	• LS45 2,750 Lm / 25 W	• G1 First Generation	• BLANK 120-277 V	• FSK 3500K 4000K 5000K	• BLANK White	• BLANK No backup. • EMD-PA08D-UNV-050 Emergency backup (120-277V).	• BLANK No motion sensor • MSB-DCE-08-TL25 Bluetooth TWIST-LOCK motion sensor • MS-DCE-08-TL25 Standalone basic motion sensor • RM-06 Remote control for standalone motion sensor	• BLANK None • 2x2SMK-4IN Surface Mount Kit for TPSC 22 - 4" height • 2x4SMK-4IN Surface Mount Kit for TPSC 24 - 4" height • 1x4SMK-4IN Surface Mount Kit for TPSC 14 - 4" height • 2x2 FLANGE Flange kit for TPSC 22 • 2x4 FLANGE Flange kit for TPSC 24 • 1x4 FLANGE Flange kit for TPSC 14 • TP-SCABLE Suspended Cable for Panel, 1 set per luminaire, 7 ft Max
	• 22 2' x 2'	• LS45 3,300 Lm / 30 W 4,450 Lm / 40 W							
	• 24 2' x 4'	• LS55 3,300 Lm / 30 W 4,400 Lm / 40 W 5,500 Lm / 50 W							

Performance Information

Series Number	Power	Wattage	LUMENS	LPW	CCT	Series Number	Power	Wattage	LUMENS	LPW	CCT
TPSC 14 LS45	High	40 W	4,450 Lm	112 Lm/W	3500K 4000K 5000K	TPSC 22 LS45	High	40 W	4,450 Lm	112 Lm/W	3500K 4000K 5000K
	Med	30 W	3,300 Lm	110 Lm/W			Med	30 W	3,300 Lm	110 Lm/W	
	Low	25 W	2,750 Lm	110 Lm/W			Low	25 W	2,750 Lm	110 Lm/W	
Series Number	Power	Wattage	LUMENS	LPW	CCT						
TPSC 24 LS55	High	50 W	5,500 Lm	110 Lm/W	3500K 4000K 5000K						
	Med	40 W	4,400 Lm	110 Lm/W							
	Low	30 W	3,300 Lm	110 Lm/W							

Specifications

Housing

Steel sheet and extruded aluminum - frosted polysrene lens.

Ambient Temperature

Suitable for use in -4° F to 122° F (-20°C to 50° C).

Mounting

Recessed Ceiling Mounting (default), Surface and Suspended Mounting with optional accessories.

Efficacy

Up to 112 lumens per watt.

CCT

Field selectable: 3500K, 4000K, and 5000K.

Lumen Output

Field selectable: 2,750 - 5,500 Lm.

Controls Functions

Multifunction and energy monitoring, daylight sensor, occupancy sensor, integral sensor receptacle, high-end trim, Bluetooth, and Luminaire Level Lighting Control (LLLC).

Warranty

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

Electrical

Standard 120V - 277V

0-10V dimming standard.

Lifespan

L70 > 100,000 hours based on IES LM-80 results and TM-21 calculations.

Certifications

UL Listed for damp locations. FCC compliant. Design Lights Consortium® (DLC) standard 5.1 listed.


Built-in Receptacle



Along the frame

The 2.5 mm receptacle is built into the panel's frame, delivering full edge-to-edge illumination and a seamless look.

The twist-lock cover blends into the panel frame until controls are needed and then simply twist's out for easy controls added.

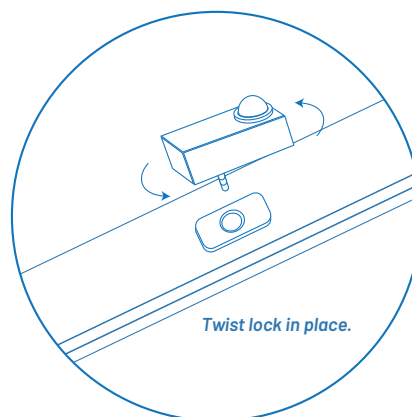

DLC ID


Series Number	DLC ID
TPSC 14 LS45	S-3P5W3M
TPSC 22 LS45	S-45511H
TPSC 24 LS55	S-WC72TV

TPSC G1




Dimensions Unit: in / mm


TPSC 24

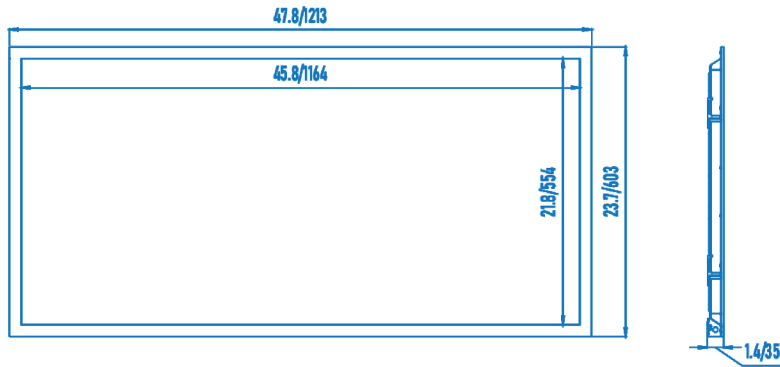

TPSC 22

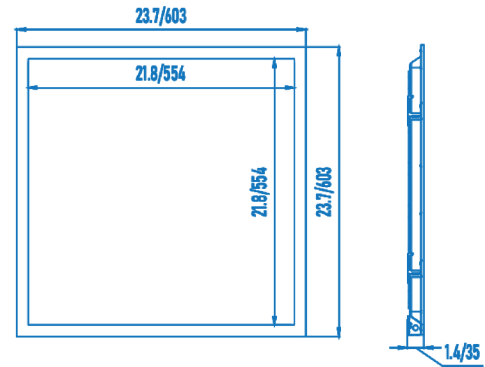

TPSC 14

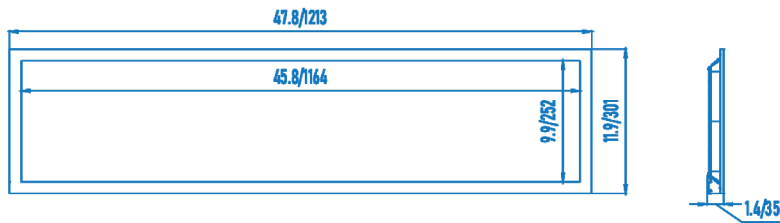

Electrical Load

	Power	Wattage	Current (A)			
			120V	208V	240V	277V
TPSC LS45	Low	25 W	0.21	0.12	0.10	0.09
	Med	30 W	0.25	0.14	0.13	0.11
	Max	40 W	0.33	0.19	0.17	0.14

	Power	Wattage	Current (A)			
			120V	208V	240V	277V
TPSC LS55	Low	30 W	0.25	0.14	0.13	0.11
	Med	40 W	0.33	0.19	0.17	0.14
	Max	50 W	0.42	0.24	0.21	0.18

Shipping Information

Product Number	Individual Box Size	Individual Box Weight	# Per Carton	# Per Pallet
TPSC 14 LS45 G1 FSK	-	-	4	-
TPSC 22 LS45 G1 FSK	-	-	4	-
TPSC 24 LS55 G1 FSK	-	-	4	-

Controls

SLG sync™ MSB-DCE-08-TL25 Bluetooth Motion Sensor



Specifications

Input Voltage DC 12V	Detection Range 32 ft. Max
Input Current 30mA Max	Mounting Height 15 ft. Max Suggested
Input Power 0.36W	Bluetooth Transmit 100' Max
Output Current 10mA Max	Operating Temperature -30°C - 55°C (-22°F - 131°F)
Output Power 0.1W	IP Rating IP20
Dimming: 10mA Max	Warranty: 5 Year

Commissioning

This Bluetooth sensor/controller is easily commissioned via the SLG Sync app, available for download on Google Play and the App Store.

App Download:



For commissioning guide and more information visit:
www.slgsync.com

SLG sync™ MS-DCE-08-TL25 Standalone Motion Sensor



Specifications

Input Voltage DC 12V	Detection Range 26 ft. Max
Input Current 15mA Max	Mounting Height 14 ft. Max Suggested
Voltage Range 10-15 VDC	Operating Temperature -25°C - 60°C (-13°F - 140°F)
Output Current 10mA Max	IP Rating IP20
Stand-by Power <0.5W	Warranty: 5 Year

Commissioning

This basic sensor is commissioned via the RM06 remote. Either pre-commissioned or commissioned on site.





Project:
Catalog #:
Fixture Type:
Notes:

CSC LS1 G1

LED Selectable Canopy Gen 1 **CONTRACTOR XP**

Due to continuous product improvements, specification and/or equipment updates may change without notice.



(Images are shown for illustration purposes only)

CSC G1

The **CSC Selectable Canopy Light** is a contractor experience LED canopy light - designed to save you money, save you time, and install quickly. 12 fixtures in 1 - 4 selectable lumen outputs for different ceiling heights and 3 selectable CCT color outputs. Fast installation that's prime for an easy retrofit - engineered with your experience first. Unleash controls with an easy mount sensor to make your safety and security a top priority with commissioning from our SLG Sync APP.

Catalog Number	Description	Lumens	Watts	CCT	Voltage
CSC LS1 G1 FSK	LED Selectable Canopy Light - First Generation	Selectable 4,000 - 8,400 Lm	Selectable 25 - 60 W	Selectable 3000K - 5000K	120V - 277V

ORDERING GUIDE

Example: **CSC LS1 G1 FSK**

Fixture Type	Selectable Lumen Output	Generation	Voltage	Selectable CCT	Finish	Emergency Backup	Options
• CSC LED Canopy Light	• LS1 4,000 Lm / 25 W 5,600 Lm / 36 W 7,000 Lm / 48 W 8,400 Lm / 60 W	• G1 First Generation	• BLANK 120-277 V	• FSK 3000K 4000K 5000K	• BLANK Dark Bronze • W White	• BLANK None • EL-CBOX Emergency Backup pre-installed	• BLANK No motion sensor Networked • MSB-ACE-04 OSLG sync Bluetooth motion sensor Standalone • MS-ACE-01 OSLG sync Standalone motion sensor • RM51 Remote control for standalone sensor. Sensor Lens (must pick one with sensor order) • MSB-20-L3 8'-20' mounting height • MSB-20-L7 20'-40' mounting height

Performance Information

Series Number	Power Percentage	Lumens	Wattage	CCT
CSC LS1 G1 FSK	100%	8,400 Lm	60 W	3000K/ 4000K/ 5000K
	80%	7,000 Lm	48 W	
	60%	5,600 Lm	36 W	
	40%	4,000 Lm	25 W	

Applications

- Parking Garages
- Canopy
- Stairwells
- Low Bay Installations

Specifications

Housing

One-piece die-cast aluminum housing secures the thermally conductive LED panel and electrical chamber.

Ambient Temperature

Suitable for use in -40° C to 40° C (-40° F to 104° F).
With emergency battery: 10° C to 40° C (50° F to 104° F).

Efficacy




Up to 160 lumens per watt.

Lifespan

Estimated 50,000 hour LED lifespan.

Dimensions

CSC LS1 G1

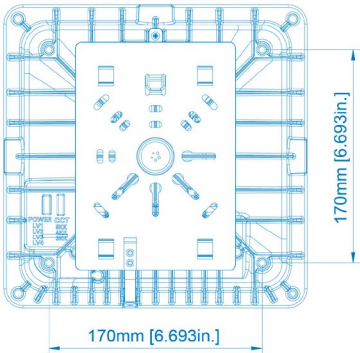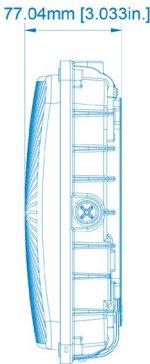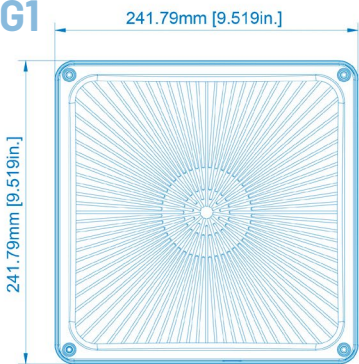

Replacement

- Canopy: 100 W MH

Lumen Output

Field selectable: 4,000 - 8,400 Lm.

CCT

Field selectable: 3000K, 4000K, and 5000K.

Warranty

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

Electrical

Standard 120V - 277V
HVV option 120-347V
Standard 0-10V dimming

Certifications

UL Listed for Wet Locations. FCC compliant. Design Lights Consortium® (DLC) Premium 5.1 qualified product.

Accessories



EL-CBOX Emergency Backup pre-installed




MSB-ACE-04 Networked Motion Sensor



MS-ACE-01 Standalone Motion Sensor

Photometric

CSC LS1 G1 FSK

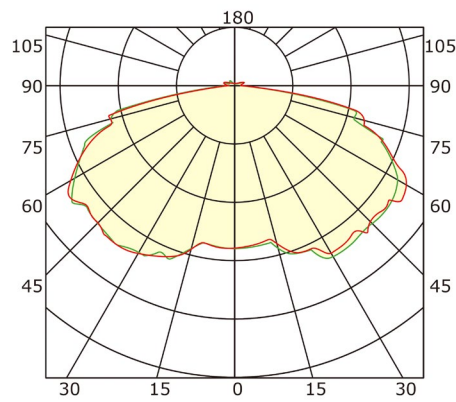

Electrical Load

			Current (A)			
	Power Setting	Wattage	120V	208V	240V	277V
CSC LS1 G1 FSK	Low	25 W	0.21	0.12	0.1	0.09
	Med	36 W	0.3	0.17	0.15	0.13
	High	48 W	0.4	0.23	0.2	0.17
	Max	60 W	0.5	0.28	0.25	0.22

Shipping Information



Product number	Individual box size	Individual box weight	# per carton	Carton box size	Carton box weight
CSC LS1 G1	10.4" x 10.4" x 3.5"	4.44 lbs	6	21.7" x 11" x 11.4"	27.63 lbs

*Box render is for example purposes only.

Projected Luminaire Maintenance

CSC LS1 G1 FSK (at 60W)

LM-80 Testing Details	
Total number of units tested per case temp:	30
Number of failures:	0
Number of units measured:	30
Test duration (hours):	12,000
Tested drive current (mA):	120
Tested case temperature 1 (T _c , °C):	85
Tested case temperature 2 (T _c , °C):	105

Test Data for 85°C Case Temp	
Time (hours)	Lumen Maintenance (%)
0	100.00%
1,000	99.68%
2,000	99.35%
3,000	98.90%
4,000	98.37%
5,000	97.81%
6,000	97.36%
7,000	96.94%
8,000	96.48%
9,000	96.01%
10,000	95.65%
11,000	96.74%
12,000	94.66%

Test Data for 105°C Case Temp	
Time (hours)	Lumen Maintenance (%)
0	100.00%
1,000	99.68%
2,000	99.35%
3,000	98.90%
4,000	98.37%
5,000	97.81%
6,000	97.36%
7,000	96.94%
8,000	96.48%
9,000	96.01%
10,000	95.65%
11,000	95.10%
12,000	94.66%

Results	
Time (t) at which to estimate Lumen maintenance (hours):	50,000
Lumen maintenance at time (t) (%):	86.47%
Reported L70 (hours):	>72,000

Bluetooth Motion sensor



MSB-ACE-04

(Pictured with L7 lens)

Specifications:

Input Voltage

AC120-277V

Frequency

50/60Hz

Input Current

10A Max @ 120V
4.3A Max @ 277V

Input Power

1200W Max

Output Voltage

AC120-277V

Output Current

10A Max @ 120V
4.3A Max @ 277V

Output Power

1200W Max

Sinking Current

10mA Max

Bluetooth Transmit

200 ft. Max

Radio Frequency

2.4 GHz +- 75 MHz

Mounting Height

20 - 40 ft

Dimming

Class 2, 0-10V DC
10mA Max

Detection Range

40 - 80ft

Operating Temperature

-30°C to 55°C
(-22°F to 131°F)

IP Rating

IP66

Warranty

5 Year warranty

Commissioning

This Bluetooth sensor/controller is easily commissioned via the SLG Sync app, available for download on Google Play and the App Store.

App Download:



Download on the App Store



GET IT ON Google Play



For commissioning guide and more information visit:

www.slgsync.com

Standalone Motion sensor



MS-ACE-01

(Pictured with L7 lens)

Specifications:

Input Voltage

AC120-277V

Frequency

60Hz

Input Current

10A Max @ 120V,
4.3A Max @ 277V

Input Power

1200W Max

Output Voltage

AC120-277V

Output Current

10A Max @ 120V,
4.3A Max @ 277V

Output Power

1200W Max

Sinking Current

10mA Max

Mounting Height

20-40 ft

IP Rating

IP66

Dimming

0-10V DC 10mA Max

Detection Range

40 - 80 ft

IR Remote Distance

26' MAX

Operating Temperature

-30°C to 65°C
(-22°F to 149°F)

Housing Material


UL 94-5VA

Warranty

5 Year warranty

Commissioning

This basic sensor is commissioned via the RM51 remote. Either pre-commissioned or commissioned on site.

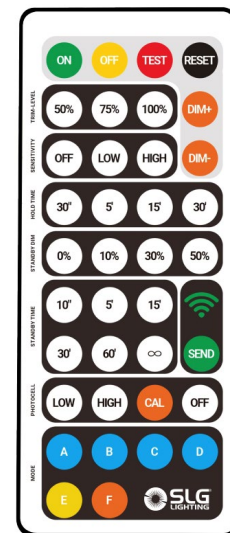



FLF G1

LED Flood Light Selectable

CONTRACTOR XP

Due to continuous product improvements, specification and/or equipment updates may change without notice.



(Images are shown for illustration purposes only)

FLF LS230 Medium Selectable Flood Light

FLF LS450 Large Selectable Flood Light

The FLF G1 Selectable Flood Light - Flex Series ships in one package featuring mount, photocell, and shorting cap. The new flex series flood light features 4 switch selectable lumen outputs and 3 switch selectable CCT outputs, offering a 12-in-1 solution. Built-in 1/8" jack receptacle makes for easy controls options for optimizing your energy savings.

ORDERING GUIDE


Example: FLF LS230 N77 G1 FSK PSC SFD

Fixture Type	Selectable Lumen Output	Dist. Type	Gen	Voltage	Selectable CCT	Included Accessories	Mount	Finish	Options
• FLF LED Flood Light-Flexible	• LS230 10,000 Lm / 60 W 15,500 Lm / 85 W 20,000 Lm / 110 W 23,000 Lm / 140 W • LS450 20,000 Lm / 120 W 28,500 Lm / 180 W 38,500 Lm / 240 W 45,000 Lm / 300 W • LS600** 46,000 Lm / 300 W 51,000 Lm / 320 W 56,000 Lm / 360 W 60,000 Lm / 400 W	• N77 NEMA 7	• G1 First Generation	• BLANK 120-277 V • HVU* 347-480 V	• FSK 3000K 4000K 5000K	PSC Ships with Photocell and Shorting Cap. BLANK Leave this blank when ordering HVU models - these do not include photocell and shorting cap. PC-2 Twistlock Photocell (for HVU only).	• SFD Slipfitter Mount (Ships in same box) • T Trunnion Mount (Ships in the same box) For HVU models only: • ALF-SFD Slipfitter Mount (Ships Separately) • ALC-T Trunnion Mount (Ships Separately) • ALC-WMB Wall Mount (Ships Separately)	• BLANK Dark Bronze	OSLG sync • MSB-DCE-06-W Bluetooth Plug-in Sensor/Controller OSLG sync • FCB-DCE-02-W Bluetooth Plug-in Controller Node • MS-DCE-09-L7-W Motion sensor • RM06 Remote for MS-DCE-09-L7-W


* HVU option does not ship with PIN receptacle, Photocell, shorting cap, or mount. **LS600 only available in 4000K/5000K CCT

UL Listed for wet locations.
FCC compliant. Design
Lights Consortium® (DLC) 5.1
Premium qualified product.

Series Number	Power Percentage	Wattage	DIST. TYPE	CRI	LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
FLF LS230	100%	140 W	NEMA 7 7x7	70	19,200 Lm	143 Lm/W	23,000 Lm	164 Lm/W	21,000 Lm	150 Lm/W
	80%	120 W	NEMA 7 7x7	70	18,000 Lm	150 Lm/W	20,000 Lm	167 Lm/W	18,500 Lm	154 Lm/W
	60%	90 W	NEMA 7 7x7	70	14,000 Lm	156 Lm/W	15,500 Lm	172 Lm/W	14,500 Lm	161 Lm/W
	40%	60 W	NEMA 7 7x7	70	9,700 Lm	162 Lm/W	10,600 Lm	177 Lm/W	10,000 Lm	167 Lm/W
FLF LS450	100%	300 W	NEMA 7 7x7	70	41,000 Lm	137 Lm/W	45,000 Lm	150 Lm/W	42,000 Lm	140 Lm/W
	80%	240 W	NEMA 7 7x7	70	35,000 Lm	146 Lm/W	38,500 Lm	160 Lm/W	36,000 Lm	150 Lm/W
	60%	180 W	NEMA 7 7x7	70	28,000 Lm	156 Lm/W	30,000 Lm	167 Lm/W	28,500 Lm	158 Lm/W
	40%	120 W	NEMA 7 7x7	70	19,200 Lm	160 Lm/W	21,500 Lm	179 Lm/W	20,000 Lm	167 Lm/W
FLF LS600	100%	400 W	NEMA 7 7x7	70	Not Applicable		60,500 Lm	151 Lm/W	60,000 Lm	150 Lm/W
	80%	360 W	NEMA 7 7x7	70			56,000 Lm	156 Lm/W	55,000 Lm	153 Lm/W
	60%	320 W	NEMA 7 7x7	70			51,000 Lm	159 Lm/W	50,000 Lm	156 Lm/W
	40%	300 W	NEMA 7 7x7	70			47,000 Lm	162 Lm/W	46,000 Lm	159 Lm/W

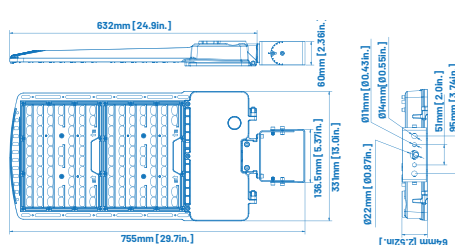

PHOTOMETRIC



NEMA 77Hx7V

ELECTRICAL LOAD

	Power Setting	Wattage	Current (A)					Current (A)	
			120V	208V	240V	277V		347V	480V
FLF LS230	Low	60 W	0.5	0.29	0.29	0.22	FLF LS230 HVU	0.17	0.13
	Med	85 W	0.71	0.41	0.41	0.31		0.24	0.18
	High	110 W	0.92	0.53	0.53	0.4		0.32	0.23
	Max	140 W	1.17	0.67	0.67	0.51		0.4	0.29
FLF LS450	Low	120 W	1	0.58	0.5	0.43	FLF LS450 HVU	0.35	0.25
	Med	180 W	1.5	0.87	0.75	0.65		0.52	0.38
	High	240 W	2	1.15	1	0.87		0.69	0.5
	Max	300 W	2.5	1.44	1.25	1.08		0.86	0.63
FLF LS600	Low	300 W	2.5	1.44	1.25	1.08	FLF LS600 HVU	0.86	0.63
	Med	320 W	2.7	1.5	1.33	1.16		0.92	0.67
	High	360 W	3	1.73	1.5	1.3		1.04	0.75
	Max	400 W	3.33	1.92	1.66	1.44		1.15	0.83

EPA OF AREA LIGHT

ITEM							
140W	0.3632	0.6849	0.8861	0.7264	1.0481	1.2078	1.0481
300W/400W	0.4758	0.8091	1.059	0.9516	1.2849	1.3923	1.2849

ACCESSORIES



PSC
Twist-lock Photocell (120-277V)
with shorting cap
(ship with all 120-277V FLF models)



PC-2
Twist-lock Photocell (480V)



MSB-DCE-06-W
Plug-in Controller/Sensor



FCB-DCE-02-W
Plug-in Node



MS-DCE-09-L7-W
Weather treated Motion Sensor



DLC PRODUCT ID

MODEL NUMBER	ID NUMBER
FLF LS230 N77 G1 FSK	S-SFDKQU
FLF LS450 N77 G1 FSK	S-ZT7E0I
FLF LS600 N77 G1 FSK	S-5LSWZ2

NOTE: ID numbers apply regardless of mount, finish color, or power type.

PROJECTED LUMINAIRE MAINTENANCE

FLF LS230 G1 FSK (AT 140W)

LM-80 Testing Details	
Total number of units tested per case temp:	30
Number of failures:	0
Number of units measured:	30
Test duration (hours):	12,000
Tested drive current (mA):	120
Tested case temperature 1 (T _c , °C):	85
Tested case temperature 2 (T _c , °C):	105

Test Data for 85°C Case Temp	
Time (hours)	Lumen Maintenance (%)
0	100.00%
1,000	100.10%
2,000	99.87%
3,000	99.56%
4,000	99.14%
5,000	98.66%
6,000	98.24%
7,000	97.87%
8,000	97.54%
9,000	97.26%
10,000	96.93%
11,000	96.74%
12,000	96.58%

Test Data for 105°C Case Temp	
Time (hours)	Lumen Maintenance (%)
0	100.00%
1,000	99.68%
2,000	99.35%
3,000	98.90%
4,000	98.37%
5,000	97.81%
6,000	97.36%
7,000	96.94%
8,000	96.48%
9,000	96.01%
10,000	95.65%
11,000	95.10%
12,000	94.66%

Results	
Time (t) at which to estimate Lumen maintenance (hours):	50,000
Lumen maintenance at time (t) (%):	86.47%
Reported L70 (hours):	>72,000

PROJECTED LUMINAIRE MAINTENANCE (CONTINUED)

FLF LS450 G1 FSK (AT 300W)

LM-80 Testing Details	
Total number of units tested per case temp:	30
Number of failures:	0
Numnber of units measured:	30
Test duration (hours):	12,000
Tested drive current (mA):	120
Tested case temperature 1 (T _c , °C):	85
Tested case temperature 2 (T _c , °C):	105

Test Data for 85°C Case Temp	
Time (hours)	Lumen Maintence (%)
0	100.00%
1,000	100.10%
2,000	99.87%
3,000	99.56%
4,000	99.14%
5,000	98.66%
6,000	98.24%
7,000	97.87%
8,000	97.54%
9,000	97.26%
10,000	96.93%
11,000	96.74%
12,000	96.58%

Test Data for 105°C Case Temp	
Time (hours)	Lumen Maintence (%)
0	100.00%
1,000	99.68%
2,000	99.35%
3,000	98.90%
4,000	98.37%
5,000	97.81%
6,000	97.36%
7,000	96.94%
8,000	96.48%
9,000	96.01%
10,000	95.65%
11,000	95.10%
12,000	94.66%

Results	
Time (t) at which to estimate Lumen maintenance (hours):	50,000
Lumen maintenance at time (t) (%):	86.47%
Reported L70 (hours):	>72,000

CATALOGUE

Catalog Number	Description	Lumens	Watts	CCT	Voltage	Mount
FLF LS230 N77 G1 FSK PSC SFD	FLF Flexible Flood Light, 23000Lm - 140W Max, 4 Level Wattage Adjustable, 120-277VAC, NEMA 7, Gen1, 3000/4000/5000K, With 3 Pin Photocell & Shorting Cap, With Slipfitter Mount, Dark Bronze	Selectable 10,000 - 23,000 Lm	Selectable 60 - 140W	Selectable 3000K - 5000K	120-277V	Included Slipfitter Mount
FLF LS230 N77 G1 FSK PSC T	FLF Flexible Flood Light, 23000Lm - 140W Max, 4 Level Wattage Adjustable, 120-277VAC, NEMA 7, Gen1, 3000/4000/5000K, With 3 Pin Photocell & Shorting Cap, With Trunnion Mount, Dark Bronze	Selectable 10,000 - 23,000 Lm	Selectable 60 - 140W	Selectable 3000K - 5000K	120-277V	Included Trunnion Mount
FLF LS450 N77 G1 FSK PSC SFD	FLF Flexible Flood Light, 45000Lm - 300W Max, 4 Level Wattage Adjustable, 120-277VAC, NEMA 7, Gen1, 3000/4000/5000K, With 3 Pin Photocell & Shorting Cap, With Slipfitter Mount, Dark Bronze	Selectable 20,000 - 45,000 Lm	Selectable 120 - 300W	Selectable 3000K - 5000K	120-277V	Included Slipfitter Mount
FLF LS450 N77 G1 FSK PSC T	FLF Flexible Flood Light, 45000Lm - 300W Max, 4 Level Wattage Adjustable, 120-277VAC, NEMA 7, Gen1, 3000/4000/5000K, With 3 Pin Photocell & Shorting Cap, With Trunnion Mount, Dark Bronze	Selectable 20,000 - 45,000 Lm	Selectable 120 - 300W	Selectable 3000K - 5000K	120-277V	Included Trunnion Mount
FLF LS600 N77 G1 FSK PSC SFD	FLF Flexible Flood Light, 60000Lm - 400W Max, 4 Level Wattage Adjustable, 120-277VAC, NEMA 7, Gen1, 3000/4000/5000K, With 3 Pin Photocell & Shorting Cap, With Slipfitter Mount, Dark Bronze	Selectable 28,000 - 60,000 Lm	Selectable 160 - 400W	Selectable 3000K - 5000K	120-277V	Included Slipfitter Mount
FLF LS600 N77 G1 FSK PSC T	FLF Flexible Flood Light, 60000Lm - 400W Max, 4 Level Wattage Adjustable, 120-277VAC, NEMA 7, Gen1, 3000/4000/5000K, With 3 Pin Photocell & Shorting Cap, With Trunnion Mount, Dark Bronze	Selectable 28,000 - 60,000 Lm	Selectable 160 - 400W	Selectable 3000K - 5000K	120-277V	Included Trunnion Mount
FLF LS230 N77 G1 HVU FSK	FLF Flexible Flood Light, 23000Lm - 140W Max, 4 Level Wattage Adjustable, 347-480VAC, NEMA 7, Gen1, 3000/4000/5000K, Dark Bronze	Selectable 20,000 - 45,000 Lm	Selectable 60 - 140W	Selectable 3000K - 5000K	347-480V	NOT INCLUDED
FLF LS450 N77 G1 HVU FSK	FLF Flexible Flood Light, 45000Lm - 300W Max, 4 Level Wattage Adjustable, 347-480VAC, NEMA 7, Gen1, 3000/4000/5000K, Dark Bronze	Selectable 10,000 - 23,000 Lm	Selectable 120 - 300W	Selectable 3000K - 5000K	347-480V	NOT INCLUDED
FLF LS600 N77 G1 HVU FSK	FLF Flexible Flood Light, 60000Lm - 400W Max, 4 Level Wattage Adjustable, 347-480VAC, NEMA 7, Gen1, 3000/4000/5000K, Dark Bronze	Selectable 28,000 - 60,000 Lm00	Selectable 160 - 400W	Selectable 3000K - 5000K	347-480V	NOT INCLUDED



✕ Clear search results