



JUSTIN DOWNS
9511 S. Dorchester Chicago, IL 60628
(708) 489-0195
justin@pdcompanies.org

PRODUCTION DISTRIBUTION COMPANIES

CUSTOMER INFORMATION:

Company Name: PALOS PARK REC BUILDING
Street Address:
City, State, Zip:
Contact:

MATERIAL LIST:


DESCRIPTION	PART NUMBER	QUANTITY	PRICE	EXT PRICE
LED WRAP	TSS 4 LS52 SR G2	6		
CONTROL NODES	SP-MSB-DCE-06-AUX-L7	6		
LED 2X4 PANEL	TPSC 24 LS52 G3 FSK	43		
CONTROL NODES	MSB-DCE-08-TL25	43		
LED 6IN CAN	DRS 6R LS27 G4 9FSK	6		
LED 2X2 PANEL	TPSC 22 LS45 G3 FSK	8		
CONTROL NODES	MSB-DCE-08-TL25	8		
BOLLARD	87995-SU	14		
LED HIGHBAY	HES LS240 G1 FSK CS4 HAC-1805 WG-HES-S	10		
CONTROL NODES	MSB-DCE-06-BT5.0-L7	10		
LED WALLPACK	WMC LS1 G2 FSK PE UNV B3	2		
LED WALLPACK	WFC LS1 G1 FSK	1		
LED CANOPY	CSC LS1 G1 FSK	2		
LED STRIP	TSRK 4 LS62 G1 FSK	18		
CONTROL NODES	MSB-DCI-08-BH4S-BT5.0	18		

TSS G1

LED Selectable Industrial Strip Gen 1

CONTRACTOR XP

Due to continuous product improvements, specification and/or equipment updates may change without notice.

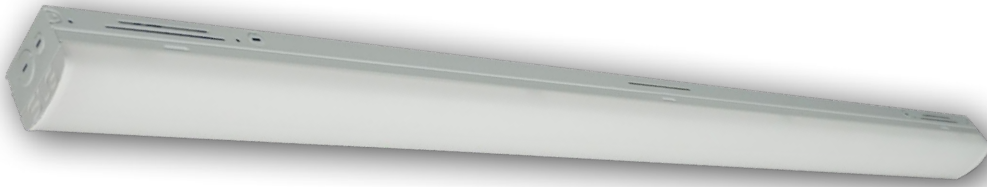

(Images are shown for illustration purposes only)

TSS G1

The **TSS LED Slim Industrial Strip** is a contractor series LED strip light that offers lumen and CCT selectable options in 4' and 8' sizes. The two-part housing design makes installation 70% faster and reduces accidents/damages. Emergency backup kit and multiple mounting options make the TSS your new "have-you-seen-this" option for strip lighting solutions.

Catalog Number	Description	Lumens	Watts	CCT	Voltage
TSS 2 20/25/30 G1 FSK	LED Selectable Slim Industrial Strip, 2 FT, CCT Selectable, White finish	Selectable 1,950 - 3,250 Lm	Selectable 15 - 25 W	Selectable 3500K - 5000K	120V - 277V
TSS 4 30/40/50 G1 FSK	LED Selectable Slim Industrial Strip, 4 FT, CCT Selectable, White finish	Selectable 3,120 - 5,200 Lm	Selectable 24 - 40 W	Selectable 3500K - 5000K	120V - 277V
TSS 8 60/80/100 G1 FSK	LED Selectable Slim Industrial Strip, 8 FT, CCT Selectable, White finish	Selectable 6,240 - 10,400 Lm	Selectable 48 - 80 W	Selectable 3500K - 5000K	120V - 277V
TSS 8 85 G1 4K	LED Static Slim Industrial Strip, 8 FT, 4000K CCT, White finish	8,450 Lm	85 W	4000K	120V - 277V

ORDERING GUIDE

Example: TSS 4 30/40/50 G1 FSK

Fixture Type	Size	Lumen Output	Generation	Voltage	Selectable CCT*	Finish	Emergency Backup	Accessories
• TSS LED Slim Industrial Strip	• 2 ft	• 20/25/30 1,950 Lm / 15 W 2,600 Lm / 20 W 3,250 Lm / 25 W	• G1 First Generation	• BLANK 120-277 V	• FSK 3500K 4000K 5000K	• BLANK White	• BLANK None • EMD DH08D-UNV-055 Emergency Backup pre-installed	• BLANK None • MSB-ACE-04** Bluetooth Motion sensor and controller • L3 = Medium bay lens (max 50ft coverage) • L7 = High bay lens (max 80ft coverage) • MS-ACE-01** Motion sensor • L3 = Medium bay lens (max 50ft coverage) • L7 = High bay lens (max 80ft coverage) • TSS-VHOOK 1 set of hooks (2 pcs) • TSC-CHAIN 1.05m chain set • SAC-1810 Strip aircraft cable • TSS-JBCVR J-Box cover and hardware • WG-TSS 4 G1 Wire guard (use 2 for TSS 8) • RC-TSS G1 Row connector
	• 4 ft	• 30/40/50 3,120 Lm / 24 W 4,160 Lm / 32 W 5,200 Lm / 40 W						
	• 8 ft	• 60/80/100 6,240 Lm / 48 W 8,320 Lm / 64 W 10,400 Lm / 80 W						

*TSS 4 ft and TSS 8 ft also available in non-selectable options. **All sensors require separate lens adder (L3 or L7)

Performance Information

Series Number	Power Level	Lumens	Wattage	CCT
TSS 2 20/25/30 G1 FSK	High	3,250 Lm	25 W	3500K/ 4000K/5000K
	Medium	2,600 Lm	20 W	
	Low	1,950 Lm	15 W	
TSS 4 30/40/50 G1 FSK	High	5,200 Lm	40 W	
	Medium	4,160 Lm	32 W	
	Low	3,120 Lm	24 W	
TSS 8 60/80/100 G1 FSK	High	10,400 Lm	80 W	
	Medium	8,320 Lm	64 W	
	Low	6,240 Lm	48 W	
TSS 8 85 G1 4K		8,450 Lm	65 W	4000K

Specifications

Housing

Aluminum body.

Ambient Temperature

Suitable for use in -20°C to 50°C (-4°F to 122°F).

Mounting

Suspending and surface mounting options.

Lifespan

L70 > 100,000 Hours at 25°C.

Efficacy

Up to 130 lumens per watt.

CCT and CRI

Field selectable: 3500K, 4000K, and 5000K. Non selectable option: 4000K. CRI 80.

Lumen Output

Field selectable: 1950Lm - 3,250Lm (2ft), 3,120 - 5,200 Lm (4ft), 6,240 - 10,400 Lm (8ft).

Non-selectable: 4,550 Lm (4 ft) and 8,450 Lm (8ft).

Warranty

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

Electrical

Standard 120V - 277V

0-10V dimming standard with a dimming range of 100% to 10%.

Certifications


UL Listed. Design Lights Consortium® (DLC) Standard 5.1 qualified product. Rated for Damp Location.

DLC Product ID


TSS 2 20/25/30 G1 FSK	S-Y7MQ20
TSS 4 30/40/50 G1 FSK	S-0JQCXB
TSS 8 60/80/100 G1 FSK	S-7PDOFQ
TSS-8 85 G1 4K	S-K35V81

Dimensions


TSS 4 (2.5" x 4')



TSS 2 (2.8" x 2')



TSS 8 (2.5" x 8')

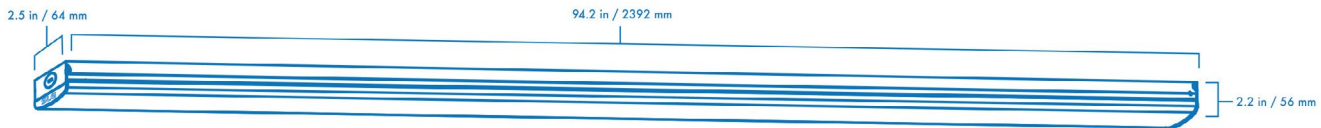

Mounting



TSS-JBCVR



TSC-CHAIN



SAC-1810



TSS-VHOOK



RC-TSS G1



WG-TSS 4 G1

J-Box cover and hardware.

1.05m chain, used with TSS-VHOOK or TSC-VHOOK

Strip aircraft cable.

Set of hooks (2 pcs)

Row connector.

Wire guard.

Emergency Backup



EMD DH08D-UNV-055

Technical Information

Type	Rated	Battery	Emergency power	Duration
EMD-DH08D-UNV-055	Input: 100-277V~,50-60Hz,50mA,4W,P.F>0.5 Output: DC20-55V, 8W Constant power Surge: 1KV(L-N) 2KV(L/N-PE)	Li-ion 7.4V 2.6Ah	8W (7.0-8.2)	90 minutes

Luminaire Maintenance

Product Number	Ambient Temperature	L70
TSS Series	25°C (77°F)	>100,000 Hours

Electrical Load


TSS Selectable Lumen/Watt

Watt	Current (A)			
	120V	208V	240V	277V
15W	0.125	0.07	0.06	0.05
20W	0.17	0.09	0.08	0.07
25W	0.21	0.12	0.10	0.09
24W	0.20	0.12	0.10	0.09
32W	0.27	0.15	0.13	0.12
40W	0.33	0.19	0.16	0.14
48W	0.40	0.23	0.20	0.17
64W	0.53	0.31	0.27	0.23
80W	0.67	0.38	0.34	0.29

TSS 4 and TSS 8 Static Lumen/Watt


Watt	Current (A)			
	120V	208V	240V	277V
35W	0.29	0.17	0.15	0.13
65W	0.54	0.31	0.27	0.23

Photometrics

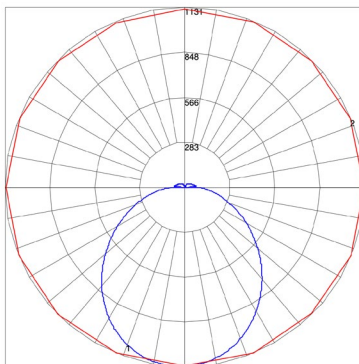

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0-20	410.37	11.90	11.90
0-30	865.47	25.20	25.10
0-40	1403.46	40.80	40.80
0-60	2439.05	70.90	70.90
0-80	3092.66	89.90	89.90
0-90	3226.03	93.70	93.70
10-90	3119.46	90.70	90.60
20-40	993.09	28.90	28.90
20-50	1539.03	44.70	44.70
40-70	1424.36	41.40	41.40
60-80	653.62	19.00	19.00
70-80	264.85	7.70	7.70
80-90	133.36	3.90	.90
90-110	101.97	3.00	3.00
90-120	143.03	4.20	4.20
90-130	174.36	5.10	5.10
90-150	208.44	6.10	6.10
90-180	215.61	6.30	6.30
110-180	113.65	3.30	3.30
0-180	3441.64	100.00	100.00

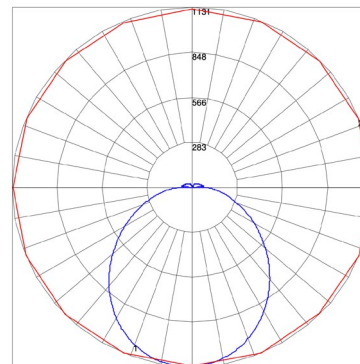

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0-20	410.37	11.90	11.90
0-30	865.47	25.20	25.10
0-40	1403.46	40.80	40.80
0-60	2439.05	70.90	70.90
0-80	3092.66	89.90	89.90
0-90	3226.03	93.70	93.70
10-90	3119.46	90.70	90.60
20-40	993.09	28.90	28.90
20-50	1539.03	44.70	44.70
40-70	1424.36	41.40	41.40
60-80	653.62	19.00	19.00
70-80	264.85	7.70	7.70
80-90	133.36	3.90	.90
90-110	101.97	3.00	3.00
90-120	143.03	4.20	4.20
90-130	174.36	5.10	5.10
90-150	208.44	6.10	6.10
90-180	215.61	6.30	6.30
110-180	113.65	3.30	3.30
0-180	3441.64	100.00	100.00

TSS 4 30/40/50 G1 FSK

Lumen setting (30 - 3120 LM)
 CCT setting 3500K Wattage (24W)

TSS 4 30/40/50 G1 FSK

Lumen setting (30 - 3120 LM)
 CCT setting 3500K Wattage (24W)

Shipping Information



*Box render is for example purposes only.

Product number	Individual box size	Individual box weight	# per carton	Carton box size	Carton box weight
TSS 2	24" x 3" x 2.8"	-	6	22.7" x 2.6" x 3"	-
TSS 4	48" x 3" x 2.5"	4.3 lbs	9	48.5" x 9" x 8"	40.57 lbs
TSS 8	95" x 3" x 2.5"	8.49 lbs	4	96" x 6.5" x 5.5"	36.38 lbs

TPSC G1

LED Selectable Panel Gen 1 **CONTROL XP**

Due to continuous product improvements, specification and/or equipment updates may change without notice.

Project:

Catalog #:

Fixture Type:

Notes:



The **TPSC Series** transforms your options in an LED backlit panel with embedded controls options and sku-saving switch selectable power/CCT outputs. The built-in controls receptacle gives your customers a “controls today” or “controls tomorrow” flexibility and a simple plugin motion sensor option to make installation easy. Available in 1' x 4', 2' x 2', or 2' x 4' sizes, this panel series is ready for quick quotes on projects giving you the freedom to bid more jobs.

Catalog Number	Description	Lumens	Watts	CCT	Voltage
TPSC 14 LS45 G1FSK	LED Selectable Backlit Panel - 1'x4' with built in 2.5 mm receptacle	Selectable 2,750 - 4,450 Lm	Selectable 25 - 40W	Selectable 3500K - 5000K	120V - 277V
TPSC 22 LS45 G1FSK	LED Selectable Backlit Panel - 2'x2' with built in 2.5 mm receptacle	Selectable 2,750 - 4,450 Lm	Selectable 25 - 40W	Selectable 3500K - 5000K	120V - 277V
TPSC 24 LS55 G1FSK	LED Selectable Backlit Panel - 2'x4' with built in 2.5 mm receptacle	Selectable 3,300 - 5,500 Lm	Selectable 30 - 50W	Selectable 3500K - 5000K	120V - 277V

ORDERING GUIDE

Example: TPSC 22 LS45 G1FSK

Fixture Type	Size	Selectable Lumen Output	Generation	Voltage	Selectable CCT	Finish	Options - Emergency Backup	Options - Controls	Options - Accessories
• TPSC Selectable Backlit Panel	• 14 1' x 4'	• LS45 2,750 Lm / 25 W	• G1 First Generation	• BLANK 120-277 V	• FSK 3500K 4000K 5000K	• BLANK White	• BLANK No backup. • EMD-PA08D-UNV-050 Emergency backup (120-277V).	• BLANK No motion sensor • MSB-DCE-08-TL25 Bluetooth TWIST-LOCK motion sensor • MS-DCE-08-TL25 Standalone basic motion sensor • RM-06 Remote control for standalone motion sensor	• BLANK None • 2x2SMK-4IN Surface Mount Kit for TPSC 22 - 4" height • 2x4SMK-4IN Surface Mount Kit for TPSC 24 - 4" height • 1x4SMK-4IN Surface Mount Kit for TPSC 14 - 4" height • 2x2 FLANGE Flange kit for TPSC 22 • 2x4 FLANGE Flange kit for TPSC 24 • 1x4 FLANGE Flange kit for TPSC 14 • TP-SCABLE Suspended Cable for Panel, 1 set per luminaire, 7 ft Max
	• 22 2' x 2'	• LS45 3,300 Lm / 30 W 4,450 Lm / 40 W							
	• 24 2' x 4'	• LS55 3,300 Lm / 30 W 4,400 Lm / 40 W 5,500 Lm / 50 W							

Performance Information

Series Number	Power	Wattage	LUMENS	LPW	CCT	Series Number	Power	Wattage	LUMENS	LPW	CCT
TPSC 14 LS45	High	40 W	4,450 Lm	112 Lm/W	3500K 4000K 5000K	TPSC 22 LS45	High	40 W	4,450 Lm	112 Lm/W	3500K 4000K 5000K
	Med	30 W	3,300 Lm	110 Lm/W			Med	30 W	3,300 Lm	110 Lm/W	
	Low	25 W	2,750 Lm	110 Lm/W			Low	25 W	2,750 Lm	110 Lm/W	
Series Number	Power	Wattage	LUMENS	LPW	CCT						
TPSC 24 LS55	High	50 W	5,500 Lm	110 Lm/W	3500K 4000K 5000K						
	Med	40 W	4,400 Lm	110 Lm/W							
	Low	30 W	3,300 Lm	110 Lm/W							

Specifications

Housing

Steel sheet and extruded aluminum - frosted polysrene lens.

Ambient Temperature

Suitable for use in -4° F to 122° F (-20°C to 50° C).

Mounting

Recessed Ceiling Mounting (default), Surface and Suspended Mounting with optional accessories.

Efficacy

Up to 112 lumens per watt.

CCT

Field selectable: 3500K, 4000K, and 5000K.

Lumen Output

Field selectable: 2,750 - 5,500 Lm.

Controls Functions

Multifunction and energy monitoring, daylight sensor, occupancy sensor, integral sensor receptacle, high-end trim, Bluetooth, and Luminaire Level Lighting Control (LLLC).

Warranty

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

Electrical

Standard 120V - 277V

0-10V dimming standard.

Lifespan

L70 > 100,000 hours based on IES LM-80 results and TM-21 calculations.

Certifications

UL Listed for damp locations. FCC compliant. Design Lights Consortium® (DLC) standard 5.1 listed.


Built-in Receptacle



Along the frame

The 2.5 mm receptacle is built into the panel's frame, delivering full edge-to-edge illumination and a seamless look.

The twist-lock cover blends into the panel frame until controls are needed and then simply twist's out for easy controls added.

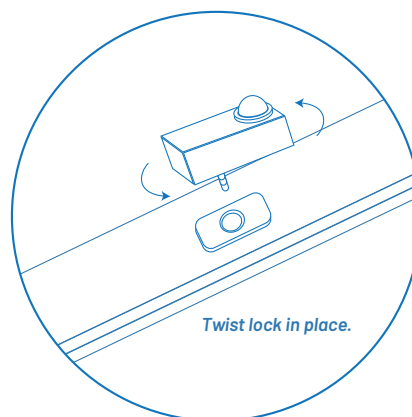

DLC ID


Series Number	DLC ID
TPSC 14 LS45	S-3P5W3M
TPSC 22 LS45	S-45511H
TPSC 24 LS55	S-WC72TV

TPSC G1




Dimensions Unit: in / mm


TPSC 24

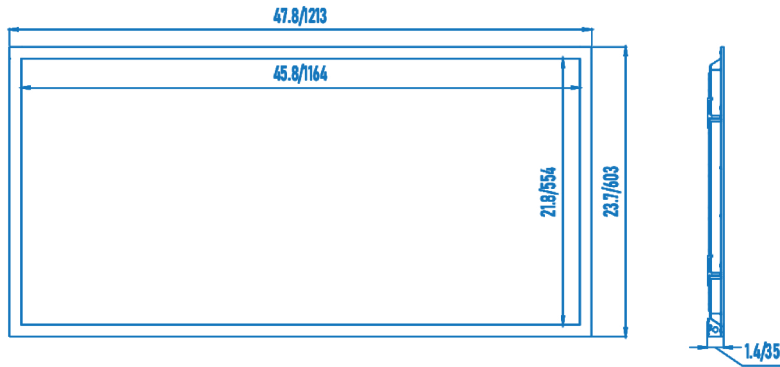

TPSC 22

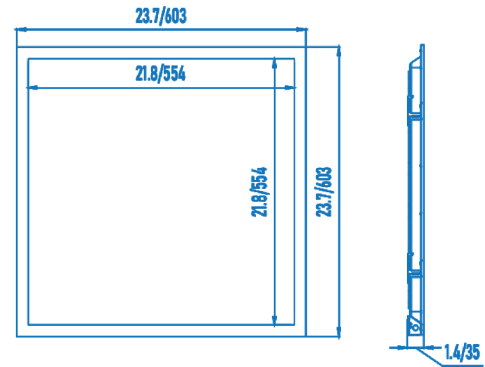

TPSC 14

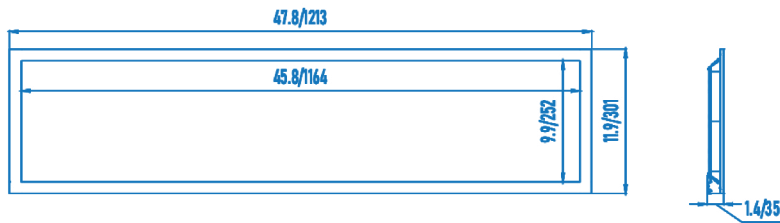

Electrical Load

	Power	Wattage	Current (A)			
			120V	208V	240V	277V
TPSC LS45	Low	25 W	0.21	0.12	0.10	0.09
	Med	30 W	0.25	0.14	0.13	0.11
	Max	40 W	0.33	0.19	0.17	0.14

	Power	Wattage	Current (A)			
			120V	208V	240V	277V
TPSC LS55	Low	30 W	0.25	0.14	0.13	0.11
	Med	40 W	0.33	0.19	0.17	0.14
	Max	50 W	0.42	0.24	0.21	0.18

Shipping Information

Product Number	Individual Box Size	Individual Box Weight	# Per Carton	# Per Pallet
TPSC 14 LS45 G1 FSK	-	-	4	-
TPSC 22 LS45 G1 FSK	-	-	4	-
TPSC 24 LS55 G1 FSK	-	-	4	-

Controls

SLG sync™ MSB-DCE-08-TL25 Bluetooth Motion Sensor



Specifications

Input Voltage DC 12V	Detection Range 32 ft. Max
Input Current 30mA Max	Mounting Height 15 ft. Max Suggested
Input Power 0.36W	Bluetooth Transmit 100' Max
Output Current 10mA Max	Operating Temperature -30°C - 55°C (-22°F - 131°F)
Output Power 0.1W	IP Rating IP20
Dimming: 10mA Max	Warranty: 5 Year

Commissioning

This Bluetooth sensor/controller is easily commissioned via the SLG Sync app, available for download on Google Play and the App Store.

App Download:



For commissioning guide and more information visit:
www.slgsync.com

SLG sync™ MS-DCE-08-TL25 Standalone Motion Sensor



Specifications

Input Voltage DC 12V	Detection Range 26 ft. Max
Input Current 15mA Max	Mounting Height 14 ft. Max Suggested
Voltage Range 10-15 VDC	Operating Temperature -25°C - 60°C (-13°F - 140°F)
Output Current 10mA Max	IP Rating IP20
Stand-by Power <0.5W	Warranty: 5 Year

Commissioning


This basic sensor is commissioned via the RM06 remote. Either pre-commissioned or commissioned on site.



DRS G4 - Commercial Retrofit Downlight



CONTRACTOR XP

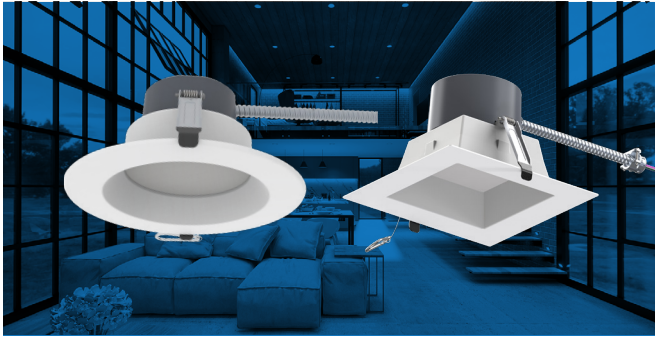

(Images are shown for illustration purposes only)

Project:

Product #:

Type:

KEY FEATURES

- Switch selectable Power - 5 Settings.
- Switch selectable CCT - 5 Settings.
- Four sizes - 4", 6", 8" & 10" round.
- 5 year warranty.
- Universal Dimming Driver (TRIAC, 0-10V, & ELV).



SPECIFICATIONS

Housing

UL94-5VA fire rated PC materials driver box. Housing less design with spring-action housing clips. 26" flexible conduit/whip with knockout quick connector. Aircraft design to support second drop protection.

Operating Temperature

-25° C to 40° C (-13° F to 104° F).

Mounting

Retrofit or New construction recessed mount.

Efficacy

Up to 135 lumens per watt.

Beam Angle

90° (4" & 6"), 95° (8" & 10"). UGR <22.

Lens

Polycarbonate material diffuser.

CCT and CRI

Field Selectable: 2700K, 3000K, 3500K, 4000K, & 5000K - 90 CRI

Lifespan

L70 > 50,000 hours @ 25°C.

Warranty

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

Electrical

Standard voltage 120-277V. Universal Dimming Driver (Dim to off(0.7V), 10-100%). PF >0.9. THD <25%. 2.5KV Ring wave surge protection.

Certifications

UL listed. ETL listed. Energy Star listed. FCC compliant. Listed for wet locations, non-conductive trim. CA Title 24 Compliant: JA8-2022.

ORDERING GUIDE

Example: DRS 6R LS27 G4 9FSK

Fixture Type	Size	Selectable Lumen Output	Generation	Voltage	CCT & CRI	Finish
• DRS LED Commercial Downlight - Retrofit	• 4R 4" Round	• LS15 650 Lm / 5.5 W 850 Lm / 7 W 1,100 Lm / 9 W 1,200 Lm / 10 W 1,450 Lm / 13 W	• G4 Fourth Generation	• BLANK 120-277V	• 9FSK 2700K 3000K 3500K 4000K 5000K - CRI 90	• BLANK White
	• 6R 6" Round	• LS27 1,200 Lm / 9.5 W 1,600 / 13 W 2,200 Lm / 18.5 W 2,400 / 21 W 2,650 Lm / 24 W				
	• 8R 8" Round	• LS34 2,050 Lm / 16 W 2,450 / 20 W 2,700 Lm / 23 W 3,200 / 27 W 3,350 Lm / 30 W				
	• 10R 10" Round	• LS42 2,550 Lm / 20 W 2,850 / 24 W 3,200 Lm / 28 W 3,600 / 32 W 4,150 Lm / 38 W				
	• 4S 4" Square	• LS12 600 Lm / 6 W 850 Lm / 9 W 1,200 Lm / 13 W				
	• 6S 6" Square	• LS15 750 Lm / 8 W 1,100 Lm / 12 W 1,500 Lm / 16 W				

For stocking opportunities please reach out to your local SLG Lighting rep or contact sales@slgus.com.

Leadtimes may vary based on current inventory levels - always consult your local SLG Lighting rep for leadtimes and project needs.

ACCESSORIES

Emergency Backup	Mounting	Wall Wash	Goof Ring
• EMA-DH08D-UNV-170 8W Emergency Battery Kit	• DX-UNV-HOUSING New Construction Universal Housing for 4", 6", 8", and 10" Round Downlights. • DE 4/6/8S HOUSING New Construction Universal Housing for 4", 6", 8", and 10" Square Downlights.	• DRS-4RW-G3 4" Round Wall Washer • DRS-6RW-G3 6" Round Wall Washer • DRS-8RW-G3 8" Round Wall Washer	• DT-GR-4R W Downlight Goof Ring 4" Round • DT-GR-6R-W Downlight Goof Ring 6" Round • DT-GR-8R-W Downlight Goof Ring 8" Round • DT-GR-10R-W Downlight Goof Ring 10" Round

Accessories shown are generally stocked items, for additional accessories questions and options please contact your local SLG Lighting rep or email sales@slgus.com.

Options for spec needs available through special request - please contact sales@slgus.com with spec needs and project size.

Due to continuous product improvements, specification and/or equipment updates may change without notice.


PERFORMANCE INFORMATION

Series Number	Power Setting	Wattage	Lumens	Series Number	Power Setting	Wattage	Lumens	CCT
DRS LS15	Max	13 W	1,450 Lm	DRS LS27	Max	24 W	2,750 Lm	2700K 3000K 3500K 4000K 5000K
	Very High	10 W	1,200 Lm		Very High	21 W	2,400 Lm	
	High	9 W	1,100 Lm		High	18.5 W	2,200 Lm	
	Medium	7 W	850 Lm		Medium	13 W	1,600 Lm	
	Low	5.5 W	650 Lm		Low	9.5 W	1,200 Lm	
DRS LS34	Max	30 W	3,350 Lm	DRS LS42	Max	38 W	4,150 Lm	
	Very High	27 W	3,200 Lm		Very High	32 W	3,600 Lm	
	High	23 W	2,700 Lm		High	28 W	3,200 Lm	
	Medium	20 W	2,450 Lm		Medium	24 W	2,850 Lm	
	Low	16 W	2,050 Lm		Low	20 W	2,550 Lm	


Performance data based on vigorous, industry standard testing and has been verified by lab results.

DIMENSIONS

DRS G4 - Retrofit Commercial Downlight - Round

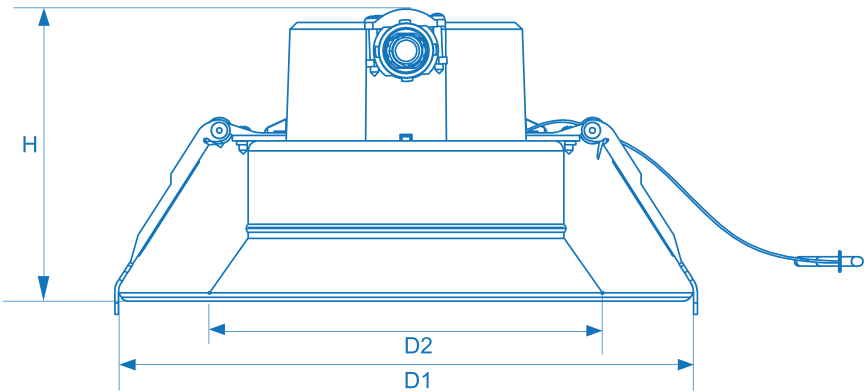

DRS G4 - J-Box Dimensions

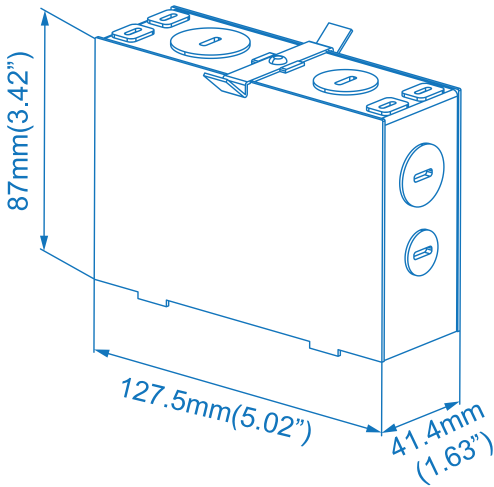


Model	Size	D1 (Diameter 1)	D2 (Diameter 2)	H (Height)	Cut-Out (Min to Max)
DRS 4R LS15 G4 9FSK	4"	5.98"	4.43"	3.71"	Ø 4.87" to Ø 5.67"
DRS 6R LS15 G4 9FSK	6"	8.41"	5.76"	4.19"	Ø 5.89" to Ø 8.10"
DRS 8R LS15 G4 9FSK	8"	10.04"	7.14"	4.51"	Ø 6.24" to Ø 9.72"
DRS 10R LS15 G4 9FSK	10"	11.38"	8.48"	4.98"	Ø 6.24" to Ø 11.06"


Due to continuous product improvements, specification and/or equipment updates may change without notice.

DIMENSIONS (Continued)

DRS 4S LS12 G4 FSK - 4" Square

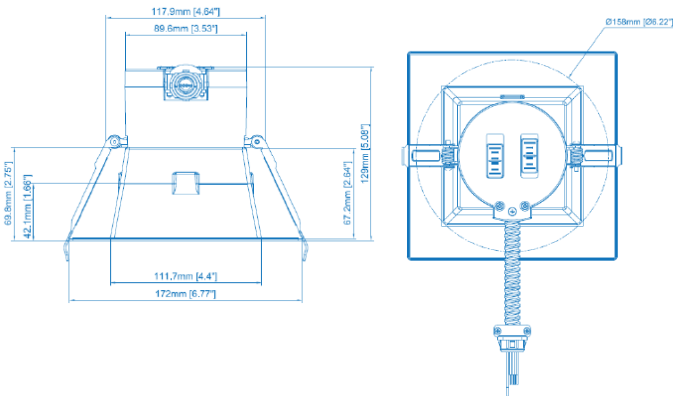


DRS 6S LS15 G4 FSK - 6" Square

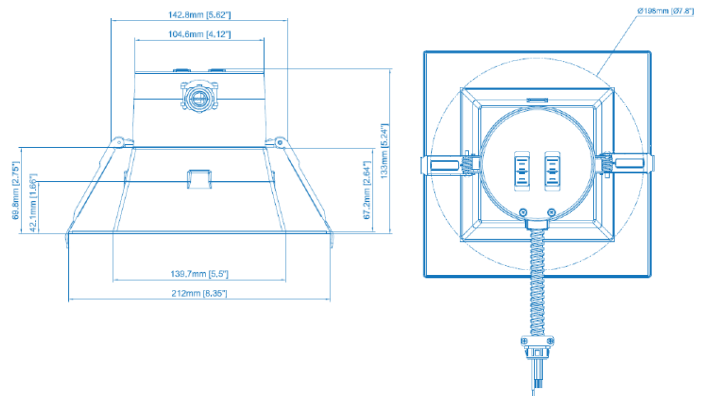

SHIPPING INFORMATION


DRS 4R LS15 G4 9FSK - @12W, 5000K CCT

DATA OF LAMP			PHOTOMETRIC DATA			Eff: 107.46 lm/W
MODEL			I _{max} (cd)	617.1	S/MH (C0/180)	1.16
NOMINAL POWER (W)	12	LOR (%)	100.0		S/MH (C90/270)	1.15
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1293.6	η UP, DN (C0-180)	0.0, 50.0	
NOMINAL FLUX (lm)	1293.61	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.0	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.25	

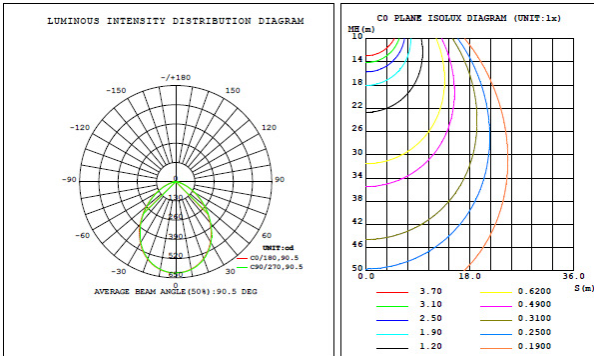


DRS 6R LS27 G4 9FSK - @30W, 5000K CCT

DATA OF LAMP			PHOTOMETRIC DATA			Eff: 103.98 lm/W
MODEL			I _{max} (cd)	1464	S/MH (C0/180)	1.17
NOMINAL POWER (W)	30	LOR (%)	100.0		S/MH (C90/270)	1.18
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	3116.5	η UP, DN (C0-180)	0.0, 50.5	
NOMINAL FLUX (lm)	3116.54	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.5	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.30	

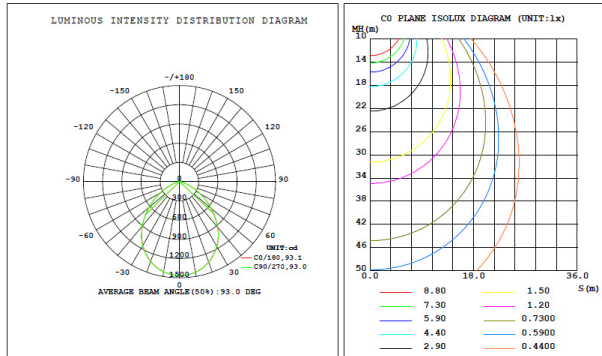


DRS 8R LS34 G4 9FSK - @25W, 5000K CCT

DATA OF LAMP			PHOTOMETRIC DATA			Eff: 106.00 lm/W
MODEL			I _{max} (cd)	1182	S/MH (C0/180)	1.21
NOMINAL POWER (W)	25	LOR (%)	100.0		S/MH (C90/270)	1.20
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	2664.0	η UP, DN (C0-180)	0.0, 50.0	
NOMINAL FLUX (lm)	2663.99	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.0	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35	

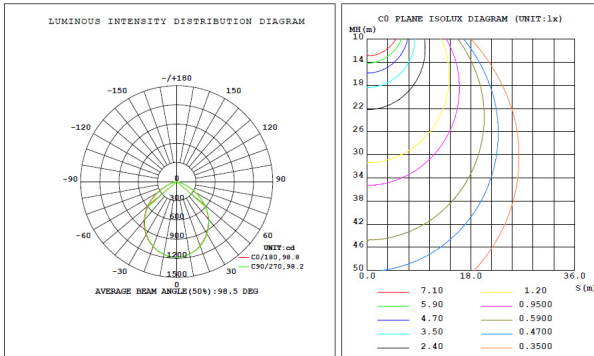

DRS 10R LS42 G4 9FSK - @36W, 5000K CCT

DATA OF LAMP			PHOTOMETRIC DATA			Eff: 105.29 lm/W
MODEL			I _{max} (cd)	1649	S/MH (C0/180)	1.22
NOMINAL POWER (W)	36	LOR (%)	100.0		S/MH (C90/270)	1.21
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	3620.6	η UP, DN (C0-180)	0.0, 49.9	
NOMINAL FLUX (lm)	3620.62	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.1	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35	

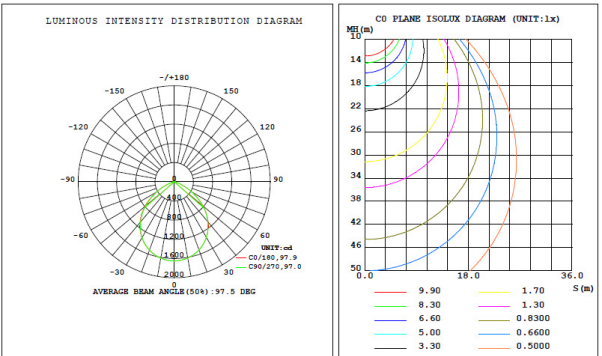

Due to continuous product improvements, specification and/or equipment updates may change without notice.

DIMMER COMPATIBILITY

No.	Brand	Model No.	Interface
1	Leviton	IP7 10-DLZ	0-10V
2	Lithonia/Synergy	ISD BC 120/277 WH	0-10V
3	Cooper	SF10P-W	0-10V
4	Lutron	DVSTV-WH	0-10V
5	HUBBELL	PSD710	0-10V
6	HUBBELL	RSD710Z	0-10V


Brand	Model No.	Wattage	Interface
Lutron	CTCL-153P-WH	150W	TRIAC
Lutron	S2-LH	300W	TRIAC
Lutron	DVCL-153P	150W	TRIAC
Legrand	HCL453PTCCCV6	450W	TRIAC
Synergy/Leviton	ISD 600 I 120 / IPI06	600W	TRIAC
Leviton	6633-PA	600W	TRIAC
Leviton	6631-PLW	600W	TRIAC
Leviton	IPL06-10Z	600W	Universal
Leviton	6674-POW	600W	Universal
Lutron	DVELV-300P-AL	300W	ELV
Lutron	NTELV-300-WH	300W	ELV
Lutron	SELV-300P	300W	ELV
Insteon	2477D	600W	ELV
HUBBELL	RSDE06	600W	ELV
Lutron	PD-5NE	150W	Wireless

SHIPPING INFORMATION

Product number	Individual box size	Master Carton Size	QTY Per Carton
DRS 4R LS15 G4 9FSK	7.09" X 7.09" X 4.82"	14.88" X 15.55" X 7.68"	6 PCS
DRS 6R LS15 G4 9FSK	9.53" X 9.53" X 5.28"	19.76" X 16.89" X 10.04"	6 PCS
DRS 8R LS15 G4 9FSK	11.18" X 11.18" X 5.67"	23.07" X 18.07" X 11.69"	6 PCS
DRS 10R LS15 G4 9FSK	12.48" X 12.48" X 5.98"	25.67" X 19.02" X 12.99"	6 PCS
DRS 4S LS12 G4 FSK	8.11" X 7.95" X 6.52"	20.59" X 16.61" X 8.62"	6 PCS
DRS 6S LS15 G4 FSK	9.65" X 6.59" X 9.45"	20.63" X 19.61" X 10.16"	6 PCS

Fixtures ship 1 per box and specific dimensions may change without notice due to improvements.

ACCESSORIES OVERVIEW



DE 3/4/6/8/10R HOUSING

New Construction Universal Housing for 4", 6", 8" and 10" Round Downlights



DRS 4/6/8R W G3

Round Wall Washer, available in 4", 6", and 8" sizes.




DT GR 4/6/8/10 W

Downlight Goof Ring 4", 6", 8", and 10" round fixtures.


Due to continuous product improvements, specification and/or equipment updates may change without notice.

GOOF RING DIMENSIONS


DT GR 4R W - 4" Round Goof Ring




DT GR 6R W - 6" Round Goof Ring



DT GR 8R W - 8" Round Goof Ring




DT GR 10R W - 10" Round Goof Ring

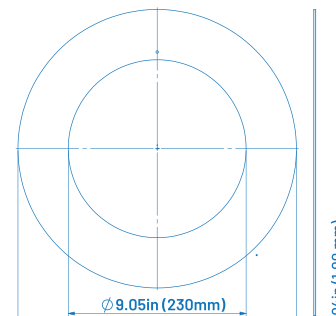


WALL WASH DIMENSIONS


DRS 4R W G3 - Wall Wash for 4" Round Downlights

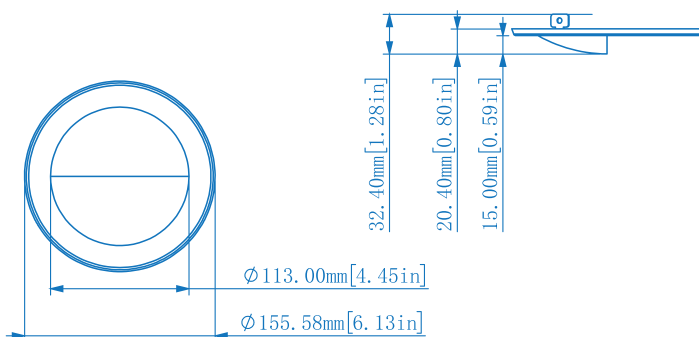

DRS 6R W G3 - Wall Wash for 6" Round Downlights

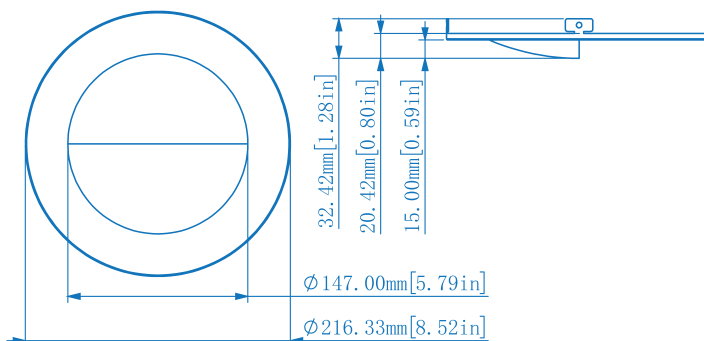

DRS 8R W G3 - Wall Wash for 8" Round Downlights

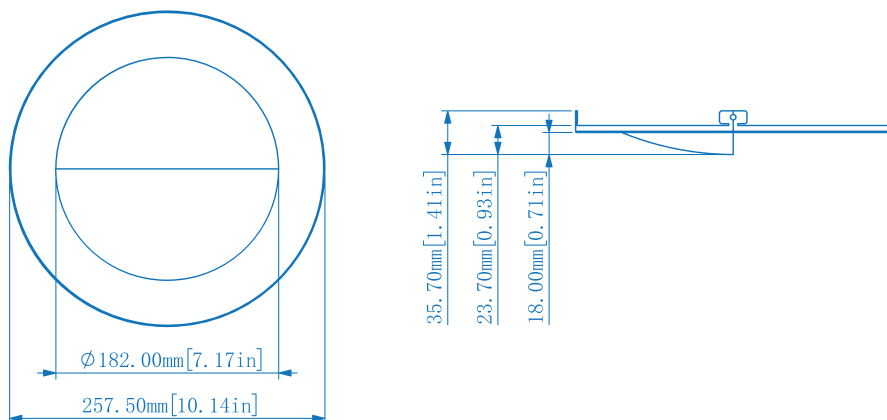


Due to continuous product improvements, specification and/or equipment updates may change without notice.

87995-SU



LFX/LBF/R/14W/19W/24W/SCT

LED 42" Outdoor Commercial Bollard Fixture, Round Landscape Area Light, Adjustable Watts, 3 CCT 3000K-5000K, IP65, Bronze, For Pathways, Entryways & Walkways

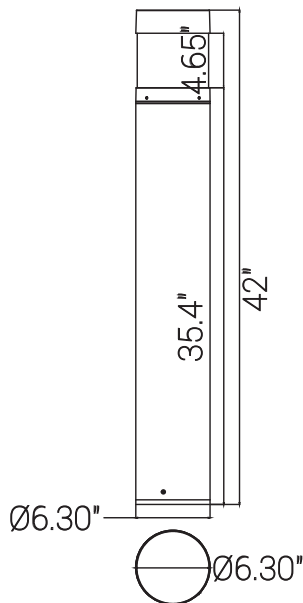

Project: _____
Type: _____
Catalog #: _____
Date: _____
Comments: _____

Technical Specifications

Photometrics

Lumen	3200
Emitted Color	CCT Selectable
Color Temp	30K/40K/50K
Color Rendering Index (CRI)	80+
Beam Spread	360°
Lifespan	50000

Electrical

Watt	14/19/24
Input Voltage	120-277
Power Factor	?0.9
Dimmable	0-10V Low Voltage

Ratings / Certifications

Safety Certification	UL Listed - Wet Location
Operating Temperature	-40F - 122F
Warranty	5 Years

Construction

Fixture Material	Aluminum
Fixture Finish	Oxidation Treatment
Lens Material	Polycarbonate
Lens Finish	Clear
Shape	Round
Mounting	Other
Usage	Outdoor



11325 Cash Road, Suite #100, Houston, Texas 77477
713-389-5680 | sales@slqus.com | www.slqus.com


PERFORMANCE INFORMATION

Series Number	Power Setting	Wattage	Lumens	Efficacy	CCT
HES LS240	Max	160 W	24,000 Lm	150 Lm/W	4000K/5000K
	Medium	120 W	18,000 Lm	150 Lm/W	
	Low	100 W	15,000 Lm	150 Lm/W	
HES LS360	Max	240 W	36,000 Lm	150 Lm/W	
	Medium	200 W	30,000 Lm	150 Lm/W	
	Low	160 W	24,000 Lm	150 Lm/W	
HES LS400	Max	270 W	40,500 Lm	150 Lm/W	
	Medium	230 W	34,500 Lm	150 Lm/W	
	Low	200 W	30,000 Lm	150 Lm/W	
HES LS600	Max	400 W	60,000 Lm	150 Lm/W	
	Medium	340 W	51,000 Lm	150 Lm/W	
	Low	270 W	40,500 Lm	150 Lm/W	


Performance data based on vigorous, industry standard testing and has been verified by lab results.

DIMENSIONS


HES LS240 - 100 - 160 W

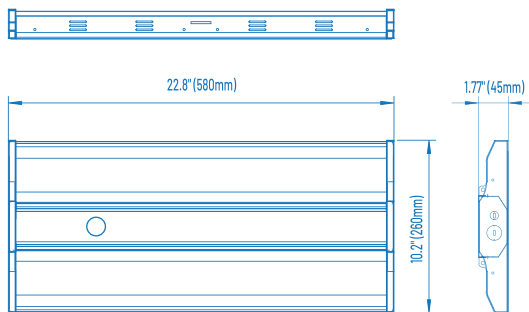

HES LS360 & LS400 - 160 - 240 W / 200 - 270 W

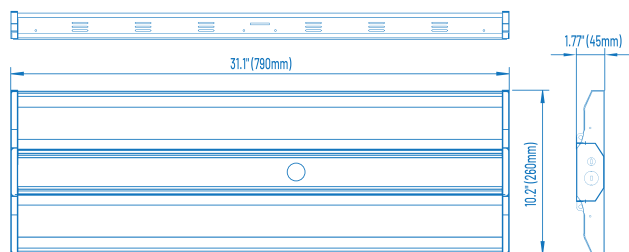

HES LS600 - 270 - 400 W

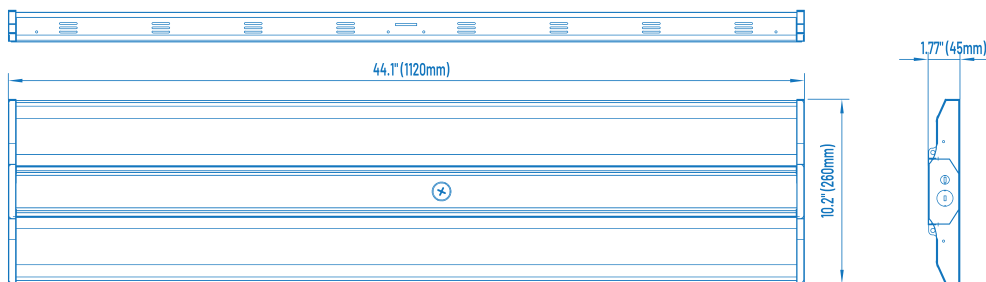

DLC ID

Product number	ID Number	Product number	ID Number
HES LS240 G1 FSK	S-BCTH4W	HES LS240 G1 HVU FSK	S-6F47NM
HES LS360 G1 FSK	S-RNQ66	HES LS360 G1 HVU FSK	S-Z3396N
HES LS400 G1 FSK	S-59Z5TW	HES LS400 G1 HVU FSK	S-SLDPL9
HES LS600 G1 FSK	S-PMYJL9	HES LS600 G1 HVU FSK	S-7FTWQ9

Due to continuous product improvements, specification and/or equipment updates may change without notice.

ELECTRICAL LOAD

Series Number	Power	Wattage	120V	208V	240V	277V
HES LS240 G1 FSK	Max	160W	0.83	0.48	0.42	0.36
	Medium	120 W	1.00	0.58	0.5	0.43
	Low	100 W	1.33	0.77	0.67	0.58
HES LS360 G1 FSK	Max	240W	1.33	0.77	0.67	0.58
	Medium	200 W	1.67	0.96	0.83	0.72
	Low	160 W	2.00	1.15	1.00	0.87
HES LS400 G1 FSK	Max	270 W	2.25	1.30	1.13	0.97
	Medium	230 W	1.92	1.11	1.00	0.83
	Low	200 W	1.70	0.96	0.83	0.72
HES LS600 G1 FSK	Max	400 W	2.33	1.35	1.17	1.01
	Medium	340 W	2.92	1.68	1.46	1.26
	Low	270 W	3.33	1.92	1.7	1.44

Series Number	347V	480V
HES LS240 G1 HVU FSK	0.29	0.21
	0.34	0.25
	0.46	0.33
HES LS360 G1 HVU FSK	0.46	0.33
	0.58	0.42
	0.69	0.5
HES LS400 G1 HVU FSK	0.78	0.56
	0.66	0.48
	0.58	0.42
HES LS600 G1 HVU FSK	0.81	0.58
	1.01	0.73
	1.15	0.83

LUMINAIRE MAINTENANCE


Product number	Ambient Temperature	L70
HES Series	25°C (77°F)	>100,000 Hours

SHIPPING INFORMATION


Product number	Individual Box Size	Indiv. Box Weight	Master Carton Size	Carton Weight	Quantity Per Carton
HES LS240 G1 FSK	23.50" X 10.51" X 1.97"	7.62 lbs	24.02" X 10.98" X 8.58"	31.16 lbs	4
HES LS360 G1 FSK	31.77" X 10.51" X 1.97"	11.27 lbs	32.28" X 10.98" X 8.58"	47.52 lbs	4
HES LS400 G1 FSK	31.77" X 10.51" X 1.97"	11.43 lbs	32.28" X 10.98" X 8.58"	47.96 lbs	4
HES LS600 G1 FSK	44.76" X 10.51" X 1.97"	13.72 lbs	45.24" X 10.87" X 4.41"	29.33 lbs	2

Fixtures ship 1 per box and specific dimensions may change without notice due to improvements.


ACCESSORIES



V-Hook Chain Mounting
(Standard)



Pendant Hanger Mount



Surface Mount



MSB-DCE-06-BT5.0
Bluetooth Motion Sensor
with controller



FCB-DCE-02-BT5.0
Bluetooth Controller




MS-DCE-09-L7
Motion Sensor

Due to continuous product improvements, specification and/or equipment updates may change without notice.

PHOTOMETRIC

**HES LS360 G1 FSK @ 36,000 LM & 50K
(Standard Wide Lens)**

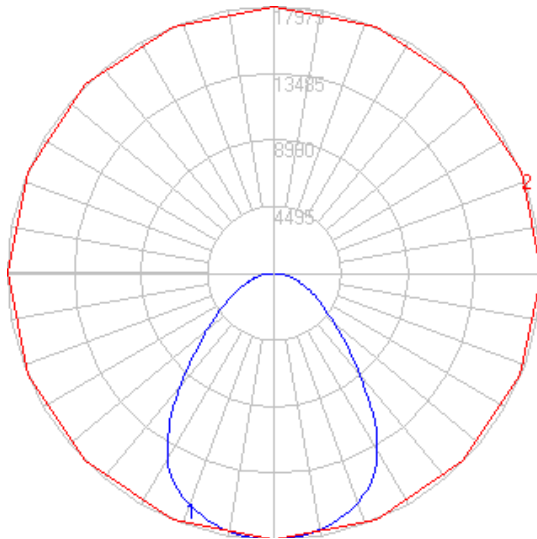


Maximum Candela = 17979.34 Located At Horizontal Angle = 112.5, Vertical Angle = 1
 # 1 - Vertical Plane Through Horizontal Angles (112.5 - 292.5) (Through Max. Cd.)
 # 2 - Horizontal Cone Through Vertical Angle (1) (Through Max. Cd.)

ZONAL LUMEN SUMMARY (STANDARD LENS)

ZONE	LUMENS	%FIXT
0-20	6560.01	18.2
0-30	13802.52	38.2
0-40	21585.37	59.8
0-60	31718.77	87.9
0-80	35540.12	98.5
0-90	36087.46	100
10-90	34388.12	95.3
20-40	15025.36	41.6
20-50	21143.33	58.6
40-70	12526.62	34.7
60-80	3821.35	10.6
70-80	1428.13	4
80-90	547.34	1.5
90-110	0	0
90-120	0	0
90-130	0	0
90-150	0	0
90-180	0	0
110-180	0	0
0-180	36087.46	100

**HES LS360 AL G1 FSK @ 36,000 LM & 50K
(Aisle Lens)**

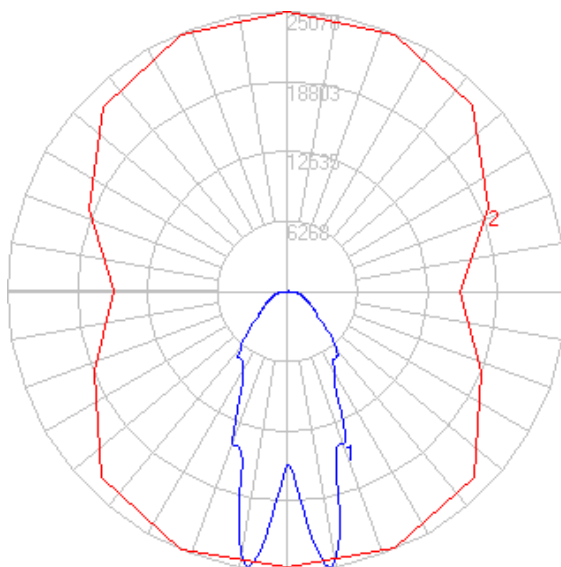

Maximum Candela = 25070 Located At Horizontal Angle = 90, Vertical Angle = 9
 # 1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
 # 2 - Horizontal Cone Through Vertical Angle (9) (Through Max. Cd.)

ZONAL LUMEN SUMMARY (AISLE LENS)

ZONE	LUMENS	%FIXT
0-20	7497.17	20.7
0-30	14442.46	39.9
0-40	21363.24	59
0-60	31819.85	87.9
0-80	35702.7	98.6
0-90	36143.1	99.8
10-90	34216.95	94.5
20-40	13866.07	38.3
20-50	20024.7	55.3
40-70	13024.03	36
60-80	3882.84	10.7
70-80	1315.43	3.6
80-90	440.4	1.2
90-110	10.38	0
90-120	14.12	0
90-130	19.19	0.1
90-150	36.23	0.1
90-180	55.1	0.2
110-180	44.72	0.1
0-180	36198.2	100

Due to continuous product improvements, specification and/or equipment updates may change without notice.

BLUETOOTH MOTION SENSOR



MSB-DCE-06-BT5.0
(Pictured with L7 lens)

SPECIFICATIONS

Input Voltage DC 12V	Bluetooth Transmit 200 ft. Max
IP Rating IP66	Radio Frequency 2.4 GHz +- 75 MHz
Input Current 50mA Max	Mounting Height 20 - 40 ft
Input Power 0.6 W	Dimming Class 2, 0-10V DC 10mA Max
Output Voltage DC 10V	Detection Range 40 - 80 ft
Output Current 10mA Max	Operating Temperature -30°C to 55°C (-22°F to 131°F)
Output Power 0.1W	Warranty 5 Year warranty
Sinking Current 10mA Max	

COMMISSION

This Bluetooth sensor/controller is easily commissioned via the SLG Sync app, available for download on Google Play and the App Store.

APP DOWNLOAD



For commissioning guide and more information visit:
www.slgsync.com

STANDALONE MOTION SENSOR



MS-DCE-09-L7

SPECIFICATIONS

Input Voltage DC 12V	IP Rating IP65
Input Current <30mA	Detection Range > 9 ft
Voltage Range 10 - 15VDC	Mounting Height Up to 40 ft
Output Power 0.1W	Dimming 0-10V
Detection Angle 120°	Operating Temperature -20°C to 60°C (-4°F to 140°F)
	Warranty 5 Year warranty

COMMISSION

This basic sensor is commissioned via the RM06 remote. Either pre-commissioned or commissioned on site.



RM06

PROJECT: _____

CATALOG #: _____

FIXTURE TYPE: _____

NOTES: _____

WMC Selectable Wall Pack Medium Contractor Series



The **Selectable Wall Pack Medium Contractor Series Gen 2** offers maximum light output for general purpose area and security lighting in a classic design. This luminaire features 3 Selectable Color Temperatures and 4 Lumen/Wattage Adjustable Levels. The luminaire efficiently delivers lumens and consumes less energy than traditional wall mount technologies.

APPLICATIONS

Security Lighting, Perimeter Lighting, Building Entrances, Walkways, etc.

REPLACEMENT

100W - 250W MH

OPTIONS



PC UNV B3



PERFORMANCE INFORMATION

LUMEN PACKAGE	SERIES NUMBER	ADJUSTABLE WATTAGE	LUMENS	SELECTABLE CCT
LS1	WMC LS1 G2 FSK	LV1 - 26W	3,860	3000K 4000K 5000K
		LV2 - 41W	5,400	
		LV3 - 55W	6,850	
		LV4 - 67W	7,900	
LS2	WMC LS2 G2 FSK PE UNV B3	LV1 - 39W	5,550	
		LV2 - 62W	8,260	
		LV3 - 88W	10,700	
		LV4 - 100W	11,500	

Power and
CCT controller



ORDERING GUIDE

EXAMPLE: WMC LS1 G2 FSK

Luminaire Type	Lumen Output	Generation	Voltage	Selectable CCT	Finish	Options
WMC	LS1	G2		FSK		PE UNV B3
☒ WMC Medium Wall Pack Contractor Series	☐ LS1 3860/5400/6850/7900 Lumens - 26W / 41W / 55W / 67W ☐ LS2 5550/8260/10700/11500 Lumens - 39W / 62W / 88W / 100W	☐ G2	☐ BLANK 120-277V ☐ HVU* 347 - 480V	☐ FSK 3000K/4000K /5000K	☐ BLANK** Dark Bronze	☐ BLANK No Option ☐ PE UNV B3 Low Voltage Button Photocell for WMC LS1 model only ☐ PC UNV B3 Button Photocell 120V-277V for WMC LS2 model only ☐ EMD-DH08D-UNV-055 Emergency Battery Backup (8W).

*High Voltage option is not DLC certified.

** For a custom color, please call to place your order.

Due to continuous product improvements, specification and/or equipment updates may change without notice.

SPECIFICATIONS

HOUSING

Die-cast aluminum housing and back-housing.

AMBIENT TEMPERATURE

Suitable for use in -40°C to +40°C (-40°F to 104°F)

MOUNTING

Mounting options include J-Box mounting and Wall mounting, wiring made-up before the lens and front housing.

EFFICACY

Up to 122 lumens per watt (see individual wattage data)

CCT AND CRI

Selectable 3000K, 4000K, and 5000K CCT available; 70CRI

OPTICS

Polycarbonate optical lens with UV stabilizers.

WARRANTY

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

ELECTRICAL

High quality constant-current drivers >90% efficiency and rated for 50/60Hz operation with Standard 120-277V input.

ENERGY DATA

Power factor $\geq 90\%$.


FINISH

Polyester Powder Dark Bronze coat.

CERTIFICATIONS

UL Listed for wet locations. Equivalent to IP65 rating. FCC compliant. RoHs compliant. Design Lights Consortium® (DLC) 5.1 listed product. Please visit www.slgus.com to confirm which versions are qualified.


DIMENSIONS

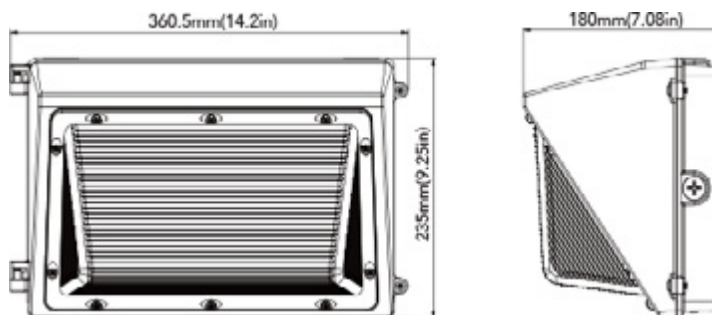

Net Weight
WMC LS1: 6.724lb
WMC LS2: 7.319lb

Due to continuous product improvements, specification and/or equipment updates may change without notice.

PHOTOMETRIC

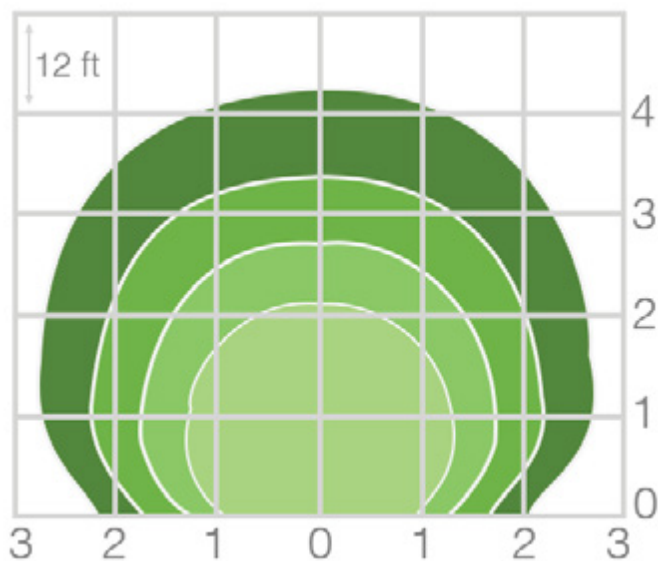

WMC LS1 G2 FSK

Mounting Height	12	14	16	18	20
Multiplier	1.8	1.3	1.0	0.8	0.6

ELECTRICAL LOAD

		Current (A)			
Series Number	Wattage	120V	208V	240V	277V
WMC LS1 G2 FSK	26W	0.22	0.13	0.11	0.09
	41W	0.34	0.20	0.17	0.15
	55W	0.46	0.26	0.23	0.20
	67W	0.56	0.32	0.28	0.24
WMC LS2 G2 FSK	39W	0.33	0.19	0.16	0.14
	62W	0.52	0.30	0.26	0.22
	88W	0.73	0.42	0.37	0.32
	100W	0.83	0.48	0.42	0.36

Due to continuous product improvements, specification and/or equipment updates may change without notice.

PROJECTED LUMINARE MAINTENANCE

WMC LS1 G2 FSK (at 65W)

LM-80 Testing Details	
Total number of units tested per case temp:	30
Number of failures:	0
Number of units measured:	30
Test duration (hours):	9,000
Tested drive current (mA):	100
Tested case temperature 1 (T _c , °C):	55
Tested case temperature 2 (T _c , °C):	105

Test Data for 55°C Case Temp	
Time (hours)	Lumen Maintenance (%)
0	100.00%
1,000	100.23%
2,000	100.03%
3,000	99.82%
4,000	99.59%
5,000	99.34%
6,000	99.11%
7,000	98.90%
8,000	98.69%
9,000	98.49%

Test Data for 105°C Case Temp	
Time (hours)	Lumen Maintenance (%)
0	100.00%
1,000	99.85%
2,000	99.54%
3,000	99.23%
4,000	98.90%
5,000	98.58%
6,000	98.27%
7,000	98.00%
8,000	97.71%
9,000	97.43%

Results	
Time (t) at which to estimate Lumen maintenance (hours):	50,000
Lumen maintenance at time (t) (%):	88.99%
Reported L70 (hours):	>54,000

WMC LS1 G2 FSK (at 100W)

LM-80 Testing Details	
Total number of units tested per case temp:	30
Number of failures:	0
Number of units measured:	30
Test duration (hours):	9,000
Tested drive current (mA):	100
Tested case temperature 1 (T _c , °C):	55
Tested case temperature 2 (T _c , °C):	105

Test Data for 55°C Case Temp	
Time (hours)	Lumen Maintenance (%)
0	100.00%
1,000	100.23%
2,000	100.03%
3,000	99.82%
4,000	99.59%
5,000	99.34%
6,000	99.11%
7,000	98.90%
8,000	98.69%
9,000	98.49%

Test Data for 105°C Case Temp	
Time (hours)	Lumen Maintenance (%)
0	100.00%
1,000	99.85%
2,000	99.54%
3,000	99.23%
4,000	98.90%
5,000	98.58%
6,000	98.27%
7,000	98.00%
8,000	97.71%
9,000	97.43%

Results	
Time (t) at which to estimate Lumen maintenance (hours):	50,000
Lumen maintenance at time (t) (%):	88.29%
Reported L70 (hours):	>54,000

Due to continuous product improvements, specification and/or equipment updates may change without notice.



CSC LS1 G1

LED Selectable Canopy Gen 1 **CONTRACTOR XP**

Due to continuous product improvements, specification and/or equipment updates may change without notice.

Project:
Catalog #:
Fixture Type:
Notes:



(Images are shown for illustration purposes only)

CSC G1

The **CSC Selectable Canopy Light** is a contractor experience LED canopy light - designed to save you money, save you time, and install quickly. 12 fixtures in 1 - 4 selectable lumen outputs for different ceiling heights and 3 selectable CCT color outputs. Fast installation that's prime for an easy retrofit - engineered with your experience first. Unleash controls with an easy mount sensor to make your safety and security a top priority with commissioning from our SLG Sync APP.

Catalog Number	Description	Lumens	Watts	CCT	Voltage
CSC LS1 G1 FSK	LED Selectable Canopy Light - First Generation	Selectable 4,000 - 8,400 Lm	Selectable 25 - 60 W	Selectable 3000K - 5000K	120V - 277V

ORDERING GUIDE

Example: CSC LS1 G1 FSK

Fixture Type	Selectable Lumen Output	Generation	Voltage	Selectable CCT	Finish	Emergency Backup	Options
• CSC LED Canopy Light	• LS1 4,000 Lm / 25 W 5,600 Lm / 36 W 7,000 Lm / 48 W 8,400 Lm / 60 W	• G1 First Generation	• BLANK 120-277 V	• FSK 3000K 4000K 5000K	• BLANK Dark Bronze • W White	• BLANK None • EL-CBOX Emergency Backup pre-installed	• BLANK No motion sensor Networked • MSB-ACE-04 OSLG sync Bluetooth motion sensor Standalone • MS-ACE-01 OSLG sync Standalone motion sensor • RM51 Remote control for standalone sensor. Sensor Lens (must pick one with sensor order) • MSB-20-L3 8'-20' mounting height • MSB-20-L7 20'-40' mounting height

Performance Information

Series Number	Power Percentage	Lumens	Wattage	CCT
CSC LS1 G1 FSK	100%	8,400 Lm	60 W	3000K/ 4000K/ 5000K
	80%	7,000 Lm	48 W	
	60%	5,600 Lm	36 W	
	40%	4,000 Lm	25 W	

Applications

- Parking Garages
- Canopy
- Stairwells
- Low Bay Installations

Replacement

- Canopy: 100 W MH

Specifications

Housing

One-piece die-cast aluminum housing secures the thermally conductive LED panel and electrical chamber.

Ambient Temperature

Suitable for use in -40° C to 40° C (-40° F to 104° F).
With emergency battery: 10° C to 40° C (50° F to 104° F).

Efficacy

Up to 160 lumens per watt.

Lifespan

Estimated 50,000 hour LED lifespan.

Lumen Output

Field selectable: 4,000 - 8,400 Lm.

CCT

Field selectable: 3000K, 4000K, and 5000K.

Warranty

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

Electrical




Standard 120V - 277V
HVV option 120-347V
Standard 0-10V dimming

Certifications

UL Listed for Wet Locations. FCC compliant. Design Lights Consortium® (DLC) Premium 5.1 qualified product.

Dimensions

CSC LS1 G1

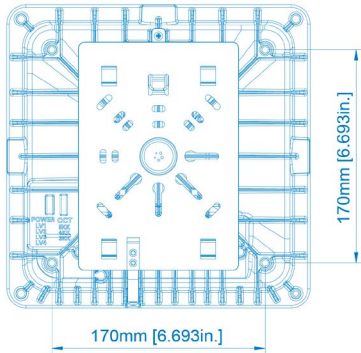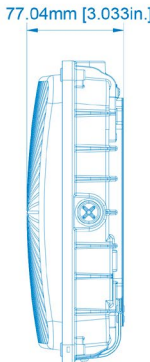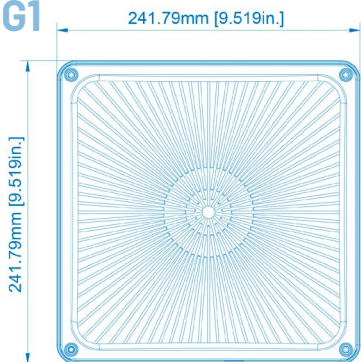

Accessories



EL-CBOX Emergency Backup pre-installed




MSB-ACE-04 Networked Motion Sensor



MS-ACE-01 Standalone Motion Sensor

Photometric

CSC LS1 G1 FSK

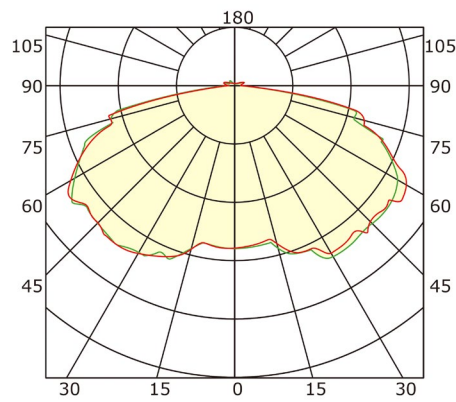

Electrical Load

			Current (A)			
	Power Setting	Wattage	120V	208V	240V	277V
CSC LS1 G1 FSK	Low	25 W	0.21	0.12	0.1	0.09
	Med	36 W	0.3	0.17	0.15	0.13
	High	48 W	0.4	0.23	0.2	0.17
	Max	60 W	0.5	0.28	0.25	0.22

Shipping Information



Product number	Individual box size	Individual box weight	# per carton	Carton box size	Carton box weight
CSC LS1 G1	10.4" x 10.4" x 3.5"	4.44 lbs	6	21.7" x 11" x 11.4"	27.63 lbs

*Box render is for example purposes only.

Projected Luminaire Maintenance

CSC LS1 G1 FSK (at 60W)

LM-80 Testing Details	
Total number of units tested per case temp:	30
Number of failures:	0
Number of units measured:	30
Test duration (hours):	12,000
Tested drive current (mA):	120
Tested case temperature 1 (T _c , °C):	85
Tested case temperature 2 (T _c , °C):	105

Test Data for 85°C Case Temp	
Time (hours)	Lumen Maintenance (%)
0	100.00%
1,000	99.68%
2,000	99.35%
3,000	98.90%
4,000	98.37%
5,000	97.81%
6,000	97.36%
7,000	96.94%
8,000	96.48%
9,000	96.01%
10,000	95.65%
11,000	96.74%
12,000	94.66%

Test Data for 105°C Case Temp	
Time (hours)	Lumen Maintenance (%)
0	100.00%
1,000	99.68%
2,000	99.35%
3,000	98.90%
4,000	98.37%
5,000	97.81%
6,000	97.36%
7,000	96.94%
8,000	96.48%
9,000	96.01%
10,000	95.65%
11,000	95.10%
12,000	94.66%

Results	
Time (t) at which to estimate Lumen maintenance (hours):	50,000
Lumen maintenance at time (t) (%):	86.47%
Reported L70 (hours):	>72,000

Bluetooth Motion sensor



MSB-ACE-04

(Pictured with L7 lens)

Specifications:

Input Voltage

AC120-277V

Frequency

50/60Hz

Input Current

10A Max @ 120V
4.3A Max @ 277V

Input Power

1200W Max

Output Voltage

AC120-277V

Output Current

10A Max @ 120V
4.3A Max @ 277V

Output Power

1200W Max

Sinking Current

10mA Max

Bluetooth Transmit

200 ft. Max

Radio Frequency

2.4 GHz +- 75 MHz

Mounting Height

20 - 40 ft

Dimming

Class 2, 0-10V DC
10mA Max

Detection Range

40 - 80ft

Operating Temperature

-30°C to 55°C
(-22°F to 131°F)

IP Rating

IP66

Warranty

5 Year warranty

Commissioning

This Bluetooth sensor/controller is easily commissioned via the SLG Sync app, available for download on Google Play and the App Store.

App Download:



Download on the App Store



GET IT ON Google Play



For commissioning guide and more information visit:

www.slgsync.com

Standalone Motion sensor



MS-ACE-01

(Pictured with L7 lens)

Specifications:

Input Voltage

AC120-277V

Frequency

60Hz

Input Current

10A Max @ 120V,
4.3A Max @ 277V

Input Power

1200W Max

Output Voltage

AC120-277V

Output Current

10A Max @ 120V,
4.3A Max @ 277V

Output Power

1200W Max

Sinking Current

10mA Max

Mounting Height

20-40 ft

IP Rating

IP66

Dimming

0-10V DC 10mA Max

Detection Range

40 - 80 ft

IR Remote Distance

26' MAX

Operating Temperature

-30°C to 65°C
(-22°F to 149°F)

Housing Material


UL 94-5VA

Warranty

5 Year warranty

Commissioning

This basic sensor is commissioned via the RM51 remote. Either pre-commissioned or commissioned on site.

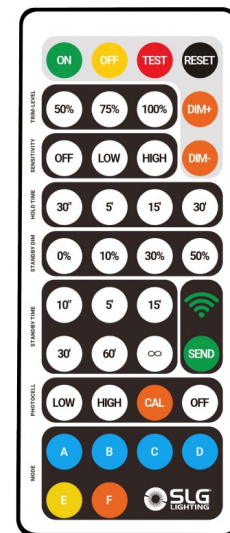

TSRK

LED Strip - Controls Flexible Retrofit Kit Gen 1 **CONTRACTOR XP**

Due to continuous product improvements, specification and/or equipment updates may change without notice.



TSRK 4 G1 - 4'

(Images are shown for illustration purposes only)

Controls Flexible

Built in BH4 receptacle with cap - no controls, eco-sensor, or Bluetooth sensor.

The **TSRK Strip Retrofit Kit** is a control experience LED strip light - designed to save you money, save you time, and install quickly. 9 fixtures in 1, this controls flexible fixture offers full lumen adjustable output and CCT color adjustable outputs. Bluetooth sensors plug-in easily with the BH4 built-in receptacle, giving you the greatest options available in an all-in-one fixture.

Catalog Number	Description	Lumens	Watts	CCT	Voltage
TSRK 4 LS62 G1 FSK	LED Strip - Retrofit Kit - 4' - Controls Flexible w/ BH4S receptacle	Selectable 3,300 - 6,200 Lm	Selectable 24 - 47 W	Selectable 3500K - 5000K	120V - 277V
TSRK 8 LS120 G1 FSK	LED Strip - Retrofit Kit - 8' - Controls Flexible w/ BH4S receptacle	Selectable 9,000 - 12,000 Lm	Selectable 65 - 90 W	Selectable 3500K - 5000K	120V - 277V

ORDERING GUIDE

Example: TSRK 4 LS62 G1 FSK

Fixture Type	Length	Adjustable Lumen Output	Generation	Voltage	Adjustable CCT	Finish	Controls Receptacle	Motion Sensor	Emergency Backup
• TSRK LED Strip - Retrofit Kit	• 4' 4' Fixture	• LS62 6,200 Lm - 47 W 4,600 Lm - 34 W 3,300 Lm - 24 W	• G1 First Generation	• BLANK 120-277 V	• FSK 3500K - 5000K	• BLANK White	• BLANK BH4 Receptacle	• BLANK None • MSB-DCI-08-BH4S-BT5.0* Bluetooth Motion sensor • MS-DCI-06-BH4S Motion sensor • RM51 Remote commissioning tool for MS-DCI-06-BH4S	• BLANK None • EMD DH08D-UNV-055 Emergency Backup pre-installed
	• 8' 8' Fixture	• LS120 12,000 Lm - 90 W 10,000 Lm - 75 W 9,000 Lm - 65 W							

*Factory install only, made to order. Cannot be field installed.

Performance Information

Series Number	Wattage	3500K		4000K		5000K	
		LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
TSRK 4 LS62	47 W	6,345 Lm	135 Lm/W	6,815 Lm	145 Lm/W	6,439 Lm	137 Lm/W
	34 W	4,828 Lm	142 Lm/W	5,168 Lm	152 Lm/W	4,896 Lm	144 Lm/W
	24 W	3,504 Lm	146 Lm/W	3,744 Lm	156 Lm/W	3,552 Lm	148 Lm/W
TSRK 8 LS120	90 W	11,970 Lm	133 Lm/W	12,870 Lm	143 Lm/W	12,150 Lm	135 Lm/W
	75 W	9,975 Lm	133 Lm/W	11,025 Lm	147 Lm/W	10,425 Lm	139 Lm/W
	65 W	9,165 Lm	141 Lm/W	9,815 Lm	151 Lm/W	9,295 Lm	143 Lm/W

Specifications

Housing and Lens

Sheet metal stamping, with frosted PC lens.

Ambient Temperature

Suitable for use in -20° C to 50° C (-4° F to 122° F).

Mounting

Mounting bracket (included).

Efficacy

Up to 156 lumens per watt.

CCT and CRI

Switch Selectable 3500K - 5000K, 80CRI

Lifespan

L70 > 100,000 at 25°C.

Lumen Output

Switch Selectable: 3,504 - 6,815 Lm (4 foot fixture).
9,165 - 12,870 Lm (8 foot fixture).

Warranty

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

Electrical

Standard 120V - 277V. 0-10V dimming.

Certifications


UL Listed for damp locations. FCC compliant. Design Lights Consortium® (DLC) 5.1 qualification listed for direct linear ambient luminaires. Design Lights Consortium® (DLC) Premium 5.1 qualification listed for low-bay and high-bay applications.

Luminaire Maintenance

Product Number	Ambient Temperature	L70
TSRK Series	25°C (77°F)	>100,000 Hours

Dimensions


TSRK 4

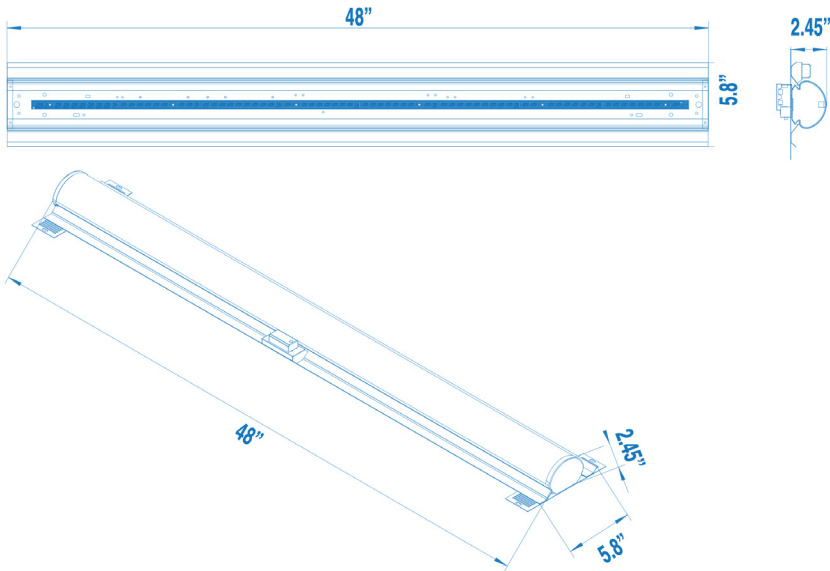


Retrofit bracket width range

Housing

4.25"-5.25"



TSRK 8

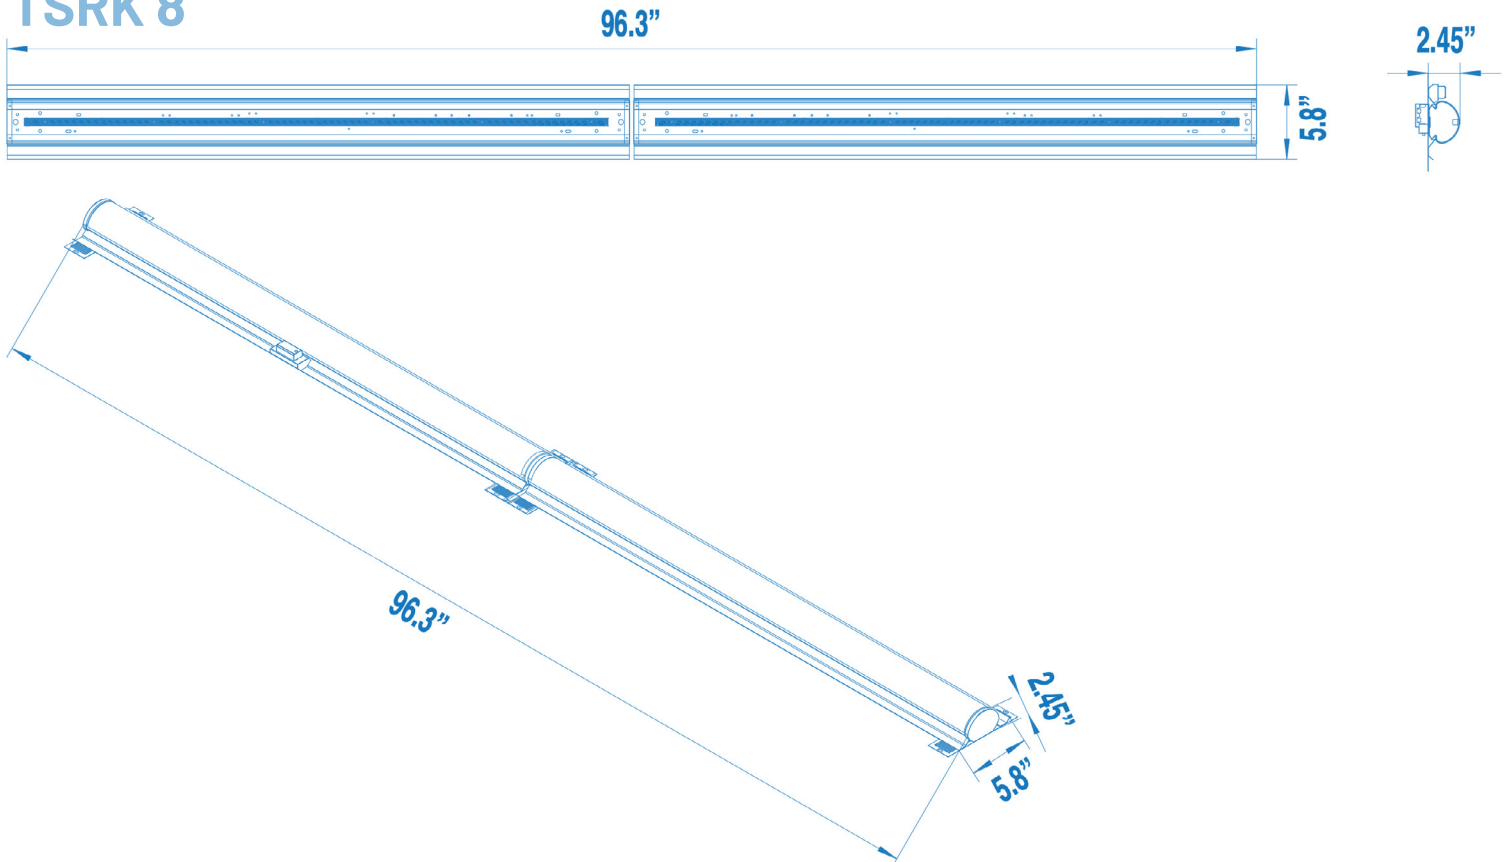

Networked Motion Sensor




MSB-DCI-08-BH4S-BT5.0

NOTE: Factory install only, made to order. Cannot be field installed.

- Input Voltage: DC 12V
- Input Current: 25mA Max
- Input Power: 0.3W
- Output Current: 10mA Max
- Output Power: 0.1W
- Dimming: Class 2, 0-10V DC 10mA Max
- Sinking Current: 10mA Max
- Bluetooth Transmit: 100ft Max
- Radio Frequency: 2.4GHz $\pm$ 75MHz
- Bluetooth Version: 5.0
- Housing Material: UL 94-5VA
- Indoor Use Only
- Detection Range: 40ft Max
- Mounting Height: 18ft Max
- Operating Temperature: -30°C to 55°C, -22°F to 131°F
- Storage Temperature: -30°C to 85°C, -22°F to 185°F
- IP Rating: IP20
- Color: White
- Warranty: 5 years warranty

Dimensions



Commissioning

This Bluetooth sensor/controller is easily commissioned via the SLG Sync app, available for download on Google Play and the App Store.

App Download:



Download on the App Store



GET IT ON Google Play



For commissioning guide and more information visit:

www.slgsync.com

Standalone Motion Sensor




MS-DCI-06-BH4S

Specifications


- Input Voltage**: DC 12V
- Input Current**: 9mA Max
- Input Power**: 0.1W
- Output Current**: 10A Max
- Output Power**: 0.1W
- Sinking Current**: 10mA Max
- Mounting Height**: 18ft Max
- IP Rating**: IP20
- Dimming**: 0-10V DC 10mA Max
- Detection Range**: 40 - 80 ft
- Operating Temperature**: -30°C to 65°C (-22°F to 149°F)
- Warranty**: 5 Year warranty

Dimensions

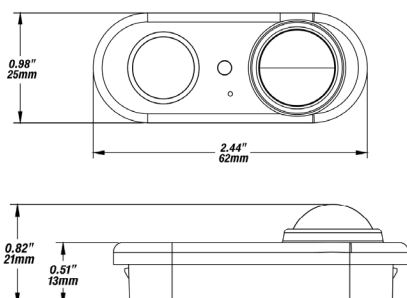


Commissioning

This basic sensor is commissioned via the RM51 remote. Either pre-commissioned or commissioned on site.

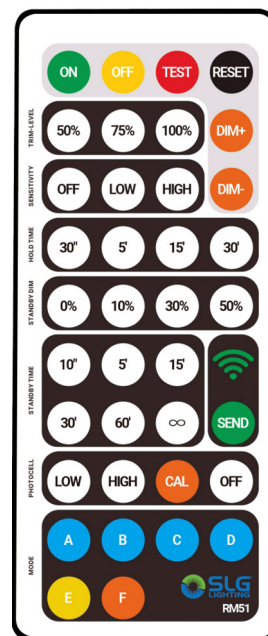

Emergency Backup

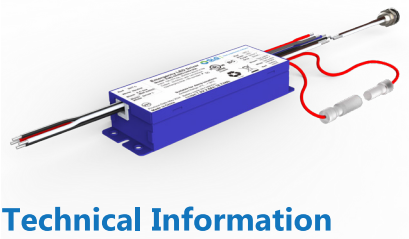

EMD DH08D-UNV-055

Technical Information

Type	Rated	Battery	Emergency power	Duration
EMD-DH08D-UNV-055	Input: 100-277V~,50-60Hz,50mA,4W,P.F>0.5 Output: DC20-55V, 8W Constant power Surge: 1KV(L-N) 2KV(L/N-PE)	Li-ion 7.4V 2.6Ah	8W (7.0-8.2)	90 minutes