



JUSTIN DOWNS
9511 S. Dorchester Chicago, IL 60628
(708) 489-0195
justin@pdcompanies.org

PRODUCTION DISTRIBUTION COMPANIES

CUSTOMER INFORMATION:

Company Name: PALOS PARK UTILITY BUILDING
Street Address:
City, State, Zip:
Contact:

MATERIAL LIST:


DESCRIPTION	PART NUMBER	QUANTITY	PRICE	EXT PRICE
LED WRAP	TSS 4 LS52 SR G2	7		
LED VAPORTITE	VTSC 4 LS60 G1 FSK	1		
LED WALLPACK	WMC LS1 G2 FSK PE UNV B3	9		
LED FLOOD	FLF LS230 N77 G1 FSK PSC SFD	1		

TSS G1

LED Selectable Industrial Strip Gen 1

CONTRACTOR XP

Due to continuous product improvements, specification and/or equipment updates may change without notice.

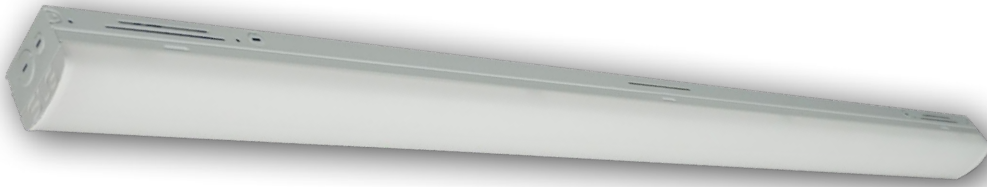

(Images are shown for illustration purposes only)

TSS G1

The **TSS LED Slim Industrial Strip** is a contractor series LED strip light that offers lumen and CCT selectable options in 4' and 8' sizes. The two-part housing design makes installation 70% faster and reduces accidents/damages. Emergency backup kit and multiple mounting options make the TSS your new "have-you-seen-this" option for strip lighting solutions.

Catalog Number	Description	Lumens	Watts	CCT	Voltage
TSS 2 20/25/30 G1 FSK	LED Selectable Slim Industrial Strip, 2 FT, CCT Selectable, White finish	Selectable 1,950 - 3,250 Lm	Selectable 15 - 25 W	Selectable 3500K - 5000K	120V - 277V
TSS 4 30/40/50 G1 FSK	LED Selectable Slim Industrial Strip, 4 FT, CCT Selectable, White finish	Selectable 3,120 - 5,200 Lm	Selectable 24 - 40 W	Selectable 3500K - 5000K	120V - 277V
TSS 8 60/80/100 G1 FSK	LED Selectable Slim Industrial Strip, 8 FT, CCT Selectable, White finish	Selectable 6,240 - 10,400 Lm	Selectable 48 - 80 W	Selectable 3500K - 5000K	120V - 277V
TSS 8 85 G1 4K	LED Static Slim Industrial Strip, 8 FT, 4000K CCT, White finish	8,450 Lm	85 W	4000K	120V - 277V

ORDERING GUIDE

Example: TSS 4 30/40/50 G1 FSK

Fixture Type	Size	Lumen Output	Generation	Voltage	Selectable CCT*	Finish	Emergency Backup	Accessories
• TSS LED Slim Industrial Strip	• 2 ft	• 20/25/30 1,950 Lm / 15 W 2,600 Lm / 20 W 3,250 Lm / 25 W	• G1 First Generation	• BLANK 120-277 V	• FSK 3500K 4000K 5000K	• BLANK White	• BLANK None • EMD DH08D-UNV-055 Emergency Backup pre-installed	• BLANK None • MSB-ACE-04** Bluetooth Motion sensor and controller • L3 = Medium bay lens (max 50ft coverage) • L7 = High bay lens (max 80ft coverage) • MS-ACE-01** Motion sensor • L3 = Medium bay lens (max 50ft coverage) • L7 = High bay lens (max 80ft coverage) • TSS-VHOOK 1 set of hooks (2 pcs) • TSC-CHAIN 1.05m chain set • SAC-1810 Strip aircraft cable • TSS-JBCVR J-Box cover and hardware • WG-TSS 4 G1 Wire guard (use 2 for TSS 8) • RC-TSS G1 Row connector
	• 4 ft	• 30/40/50 3,120 Lm / 24 W 4,160 Lm / 32 W 5,200 Lm / 40 W						
	• 8 ft	• 60/80/100 6,240 Lm / 48 W 8,320 Lm / 64 W 10,400 Lm / 80 W						

*TSS 4 ft and TSS 8ft also available in non-selectable options. **All sensors require separate lens adder (L3 or L7)

Performance Information

Series Number	Power Level	Lumens	Wattage	CCT
TSS 2 20/25/30 G1 FSK	High	3,250 Lm	25 W	3500K/ 4000K/5000K
	Medium	2,600 Lm	20 W	
	Low	1,950 Lm	15 W	
TSS 4 30/40/50 G1 FSK	High	5,200 Lm	40 W	
	Medium	4,160 Lm	32 W	
	Low	3,120 Lm	24 W	
TSS 8 60/80/100 G1 FSK	High	10,400 Lm	80 W	
	Medium	8,320 Lm	64 W	
	Low	6,240 Lm	48 W	
TSS 8 85 G1 4K		8,450 Lm	65 W	4000K

Specifications

Housing

Aluminum body.

Ambient Temperature

Suitable for use in -20°C to 50°C (-4°F to 122°F).

Mounting

Suspending and surface mounting options.

Lifespan

L70 > 100,000 Hours at 25°C.

Efficacy

Up to 130 lumens per watt.

CCT and CRI

Field selectable: 3500K, 4000K, and 5000K. Non selectable option: 4000K. CRI 80.

Lumen Output

Field selectable: 1950Lm - 3,250Lm (2ft), 3,120 - 5,200 Lm (4ft), 6,240 - 10,400 Lm (8ft).

Non-selectable: 4,550 Lm (4 ft) and 8,450 Lm (8ft).

Warranty

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

Electrical

Standard 120V - 277V

0-10V dimming standard with a dimming range of 100% to 10%.

Certifications


UL Listed. Design Lights Consortium® (DLC) Standard 5.1 qualified product. Rated for Damp Location.

DLC Product ID


TSS 2 20/25/30 G1 FSK	S-Y7MQ20
TSS 4 30/40/50 G1 FSK	S-0JQCXB
TSS 8 60/80/100 G1 FSK	S-7PDOFQ
TSS-8 85 G1 4K	S-K35V81

Dimensions


TSS 4 (2.5" x 4')



TSS 2 (2.8" x 2')



TSS 8 (2.5" x 8')

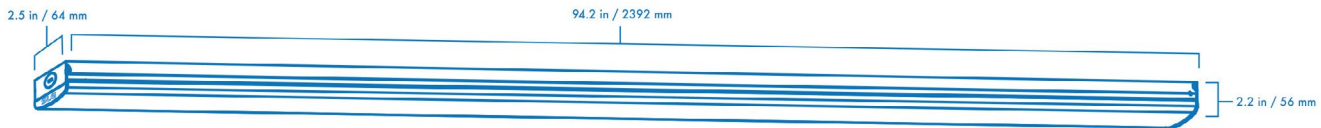

Mounting



TSS-JBCVR



TSC-CHAIN



SAC-1810



TSS-VHOOK



RC-TSS G1



WG-TSS 4 G1

J-Box cover and hardware.

1.05m chain, used with TSS-VHOOK or TSC-VHOOK

Strip aircraft cable.

Set of hooks (2 pcs)

Row connector.

Wire guard.

Emergency Backup



EMD DH08D-UNV-055

Technical Information

Type	Rated	Battery	Emergency power	Duration
EMD-DH08D-UNV-055	Input: 100-277V~,50-60Hz,50mA,4W,P.F>0.5 Output: DC20-55V, 8W Constant power Surge: 1KV(L-N) 2KV(L/N-PE)	Li-ion 7.4V 2.6Ah	8W (7.0-8.2)	90 minutes

Luminaire Maintenance

Product Number	Ambient Temperature	L70
TSS Series	25°C (77°F)	>100,000 Hours

Electrical Load


TSS Selectable Lumen/Watt

Watt	Current (A)			
	120V	208V	240V	277V
15W	0.125	0.07	0.06	0.05
20W	0.17	0.09	0.08	0.07
25W	0.21	0.12	0.10	0.09
24W	0.20	0.12	0.10	0.09
32W	0.27	0.15	0.13	0.12
40W	0.33	0.19	0.16	0.14
48W	0.40	0.23	0.20	0.17
64W	0.53	0.31	0.27	0.23
80W	0.67	0.38	0.34	0.29

TSS 4 and TSS 8 Static Lumen/Watt


Watt	Current (A)			
	120V	208V	240V	277V
35W	0.29	0.17	0.15	0.13
65W	0.54	0.31	0.27	0.23

Photometrics

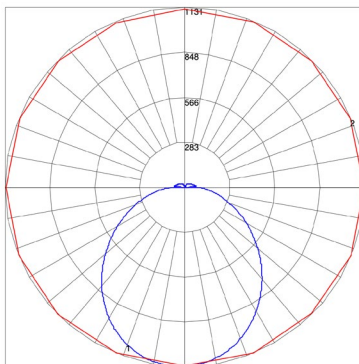

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0-20	410.37	11.90	11.90
0-30	865.47	25.20	25.10
0-40	1403.46	40.80	40.80
0-60	2439.05	70.90	70.90
0-80	3092.66	89.90	89.90
0-90	3226.03	93.70	93.70
10-90	3119.46	90.70	90.60
20-40	993.09	28.90	28.90
20-50	1539.03	44.70	44.70
40-70	1424.36	41.40	41.40
60-80	653.62	19.00	19.00
70-80	264.85	7.70	7.70
80-90	133.36	3.90	.90
90-110	101.97	3.00	3.00
90-120	143.03	4.20	4.20
90-130	174.36	5.10	5.10
90-150	208.44	6.10	6.10
90-180	215.61	6.30	6.30
110-180	113.65	3.30	3.30
0-180	3441.64	100.00	100.00

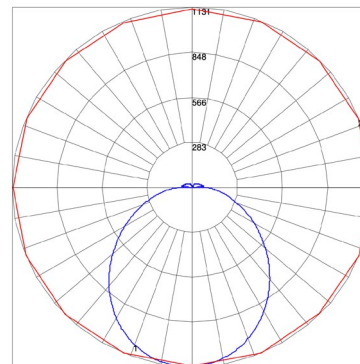

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0-20	410.37	11.90	11.90
0-30	865.47	25.20	25.10
0-40	1403.46	40.80	40.80
0-60	2439.05	70.90	70.90
0-80	3092.66	89.90	89.90
0-90	3226.03	93.70	93.70
10-90	3119.46	90.70	90.60
20-40	993.09	28.90	28.90
20-50	1539.03	44.70	44.70
40-70	1424.36	41.40	41.40
60-80	653.62	19.00	19.00
70-80	264.85	7.70	7.70
80-90	133.36	3.90	.90
90-110	101.97	3.00	3.00
90-120	143.03	4.20	4.20
90-130	174.36	5.10	5.10
90-150	208.44	6.10	6.10
90-180	215.61	6.30	6.30
110-180	113.65	3.30	3.30
0-180	3441.64	100.00	100.00

TSS 4 30/40/50 G1 FSK

Lumen setting (30 - 3120 LM)
 CCT setting 3500K Wattage (24W)

TSS 4 30/40/50 G1 FSK

Lumen setting (30 - 3120 LM)
 CCT setting 3500K Wattage (24W)

Shipping Information



*Box render is for example purposes only.

Product number	Individual box size	Individual box weight	# per carton	Carton box size	Carton box weight
TSS 2	24" x 3" x 2.8"	-	6	22.7" x 2.6" x 3"	-
TSS 4	48" x 3" x 2.5"	4.3 lbs	9	48.5" x 9" x 8"	40.57 lbs
TSS 8	95" x 3" x 2.5"	8.49 lbs	4	96" x 6.5" x 5.5"	36.38 lbs

VTS G1

LED Vapor Tight Gen 1 **CONTRACTOR XP**

Due to continuous product improvements, specification and/or equipment updates may change without notice.



VTS 4 LS1 G1 FSK - 4 ft

2 Piece housing - Designed to save on installation time and prevent damage

The **VTS G1 Selectable Vapor Tight Strip Light** is a contractor experience LED vapor tight strip light available in 2', 4', and 8' lengths. **Future-proof** your investment in lighting with our selectable power and CCT Vapor Tight Strip Lights, fast and easy **2 piece housing design** prevents damage and saves on installation time. IP 66 rated, NSF-approved, and UL 94-5VA flame classification suitable for a wide range of environments.

(Images are shown for illustration purposes only)

Catalog Number	Description	Lumens	Watts	CCT	Voltage
VTS 2 LS1 G1 FSK	LED Vapor Tight Selectable Strip - 2 Foot- First Generation - UL94-5VA housing	Selectable 1,950 - 3,250	Selectable 15 - 25 W	Selectable 3500K - 5000K	120V - 277V
VTS 4 LS1 G1 FSK	LED Vapor Tight Selectable Strip - 4 Foot- First Generation - UL94-5VA housing	Selectable 4,000 - 5,900 Lm	Selectable 30 - 45 W	Selectable 3500K - 5000K	120V - 277V
VTS 8 LS1 G1 FSK	LED Vapor Tight Selectable Strip - 8 Foot - First Generation - UL94-5VA housing	Selectable 8,200 - 12,000 Lm	Selectable 60 - 90 W	Selectable 3500K - 5000K	120V - 277V

ORDERING GUIDE

Example: **VTS 4 LS1 G1 FSK**

Fixture Type	Size	Selectable Lumen Output	Generation	Voltage	Selectable CCT	Finish	Accessories
• VTS LED Vapor Tight Strip	• 2 2'	• LS1 1,950 Lm / 15 W 2,600 Lm / 20 W 3,250 Lm / 25 W	• G1 First Generation	• BLANK 120-277 V	• FSK 3500K 4000K 5000K	• BLANK White	• EMD-DH08D-UNV-055 - 8W Emergency Backup • MS-ACE-01 - Motion Sensor (must pick a lens from below.) • MSB-20-L3 - Lens for MS-ACE-01 - 8-20ft mounting height. • MSB-20-L7 - Lens for MS-ACE-01 - 20-40ft mounting height.
	• 4 4'	• LS1 4,000 Lm / 30 W 5,100 Lm / 38 W 5,900 Lm / 45 W					
	• 8 8'	• LS2 8,200 Lm / 60 W 10,000 Lm / 75 W 12,000 Lm / 90 W					

Performance Information

Series Number	Wattage	3500K		4000K		5000K	
		Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
VTS 2 LS1 G1 FSK	15 W	1,900 Lm	126 Lm/W	1,950 Lm	130 Lm/W	1,920 Lm	128 Lm/W
	20 W	2,460 Lm	123 Lm/W	2,600 Lm	130 Lm/W	2,540 Lm	127 Lm/W
	25 W	3,200 Lm	128 Lm/W	3,250 Lm	130 Lm/W	3,225 Lm	129 Lm/W
VTS 4 LS1 G1 FSK	30 W	4,080 Lm	136 Lm/W	4,140 Lm	138 Lm/W	4,110 Lm	137 Lm/W
	38 W	5,054 Lm	133 Lm/W	5,130 Lm	135 Lm/W	5,092 Lm	134 Lm/W
	45 W	5,850 Lm	130 Lm/W	5,940 Lm	132 Lm/W	5,895 Lm	131 Lm/W
VTS 8 LS2 G1 FSK	60 W	8,160 Lm	136 Lm/W	8,280 Lm	138 Lm/W	8,220 Lm	137 Lm/W
	75 W	9,975 Lm	133 Lm/W	10,125 Lm	135 Lm/W	10,050 Lm	134 Lm/W
	90 W	11,700 Lm	130 Lm/W	11,880 Lm	132 Lm/W	11,790 Lm	131 Lm/W

Specifications

Housing

Light gray polycarbonate housing with stainless steel latches, frosted polycarbonate lens.

Operating Temperature

Suitable for use in -40° C to 50° C (-40° F to 122° F) when suspended at least 18" from ceiling.

Suitable for use in -40° C to 45° C (-40° F to 113° F) when surface mounted.

Mounting

Surface and Suspended (cable/chain) mounting - includes V-hooks, surfacing mount bracket, and cord grip.

Efficacy

Up to 138 lumens per watt.

CCT

Field selectable: 3500K, 4000K, and 5000K.

UL 94

5VA flame classification.

Lifespan

L70 > 100,000 Hours at 25° C.

Warranty

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

Electrical

Standard 120V - 277V

Dimming Driver

Driver includes 12V AUX and dimming control wiring for 0-10V dimming systems. The dim-to-off voltage threshold ranges from 0.1V to 0.5V.

Certifications

UL Listed for Wet Locations. Equivalent to IP66 rating. FCC compliant. Design Lights Consortium® (DLC) 5.1 qualified listed product.


DLC Product ID

VTS 2 LS1 G1 FSK	See DLC website.
VTS 4 LS1 G1 FSK	S-XJ0ZVE
VTS 8 LS2 G1 FSK	S-4GIMW3


Luminaire Maintenance

Product Number	Ambient Temperature	L70
VTS Series	25°C (77°F)	>100,000 Hours

Dimensions

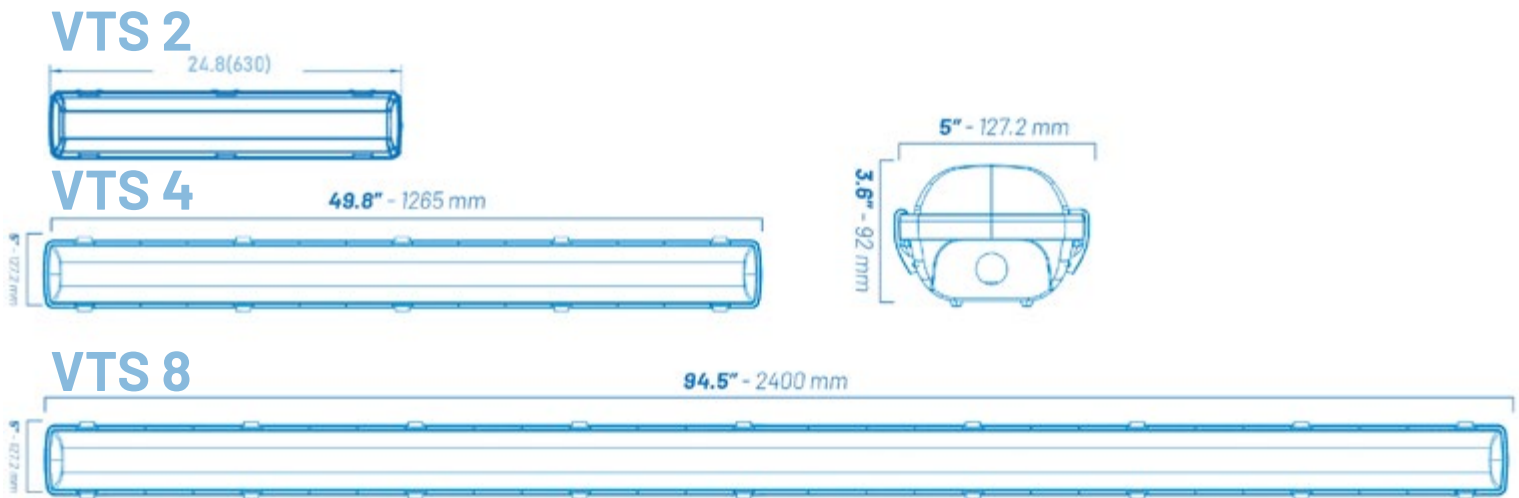

Photometric

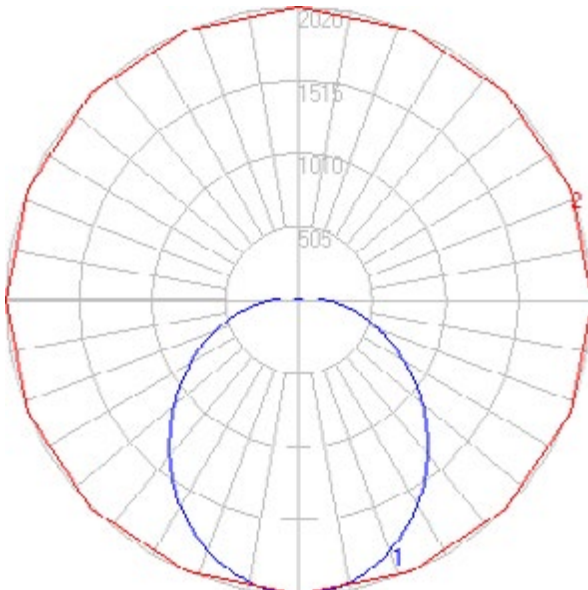

VTS 4 LS1 G1 FSK-6000 LM/5000K CCT

HORIZONTAL BEAM ANGLE (50%)	123.6
VERTICAL BEAM ANGLE (50%)	96.9

ACCESSORIES



V-HOOK

(Included mounting equipment)



EMD-DH08D-UNV-055

Specifications

Input Voltage 100-277 V AC	Emergency Power 8W	Emergency Time 90 minutes	Surge 1 KV (L-N) 2 KV (L/N-PE)
Frequency 50/60Hz	Battery Li-Ion 7.4V 2.6Ah	Output Voltage 20-55V DC	




MS-ACE-01

Specifications

Input Voltage AC120-277V	Output Voltage AC120-277V	Mounting Height 20 - 40 ft	Operating Temperature -30°C to 55°C (-22°F to 131°F)
Frequency 60Hz	Output Current 10A Max @ 120V 4.3A Max @ 277V	IP Rating IP66	IR Remote Distance 26' MAX
Input Current 10A Max @ 120V 4.3A Max @ 277V	Output Power 1200W Max	Dimming Class 2, 0-10V DC 10mA Max	Housing Material UL 94-5VA
Input Power 1200W Max	Sinking Current 10mA Max	Detection Range 40 - 80ft	Warranty 5 Year warranty

SHIPPING INFORMATION



VTS 4 LS1 G1 FSK



VTS 8 LS1 G1 FSK

Product number	Individual box size	Individual box weight	Master carton box size	# per carton	Master carton weight
VTS 4 LS1 G1 FSK	51.4"L x 5.2"W x 3.5"H	6.72 LBS	52"L x 11.3"W x 8"H	4	26.67 LBS
VTS 8 LS1 G1 FSK	95.8"L x 5.2"W x 3.7"H	12.67 LBS	96.7"L x 10.8"W x 8"H	4	50.68 LBS

PROJECT: _____

CATALOG #: _____

FIXTURE TYPE: _____

NOTES: _____

WMC Selectable Wall Pack Medium Contractor Series



The **Selectable Wall Pack Medium Contractor Series Gen 2** offers maximum light output for general purpose area and security lighting in a classic design. This luminaire features 3 Selectable Color Temperatures and 4 Lumen/Wattage Adjustable Levels. The luminaire efficiently delivers lumens and consumes less energy than traditional wall mount technologies.

APPLICATIONS

Security Lighting, Perimeter Lighting, Building Entrances, Walkways, etc.

REPLACEMENT

100W - 250W MH

OPTIONS



PC UNV B3



PERFORMANCE INFORMATION

LUMEN PACKAGE	SERIES NUMBER	ADJUSTABLE WATTAGE	LUMENS	SELECTABLE CCT
LS1	WMC LS1 G2 FSK	LV1 - 26W	3,860	3000K 4000K 5000K
		LV2 - 41W	5,400	
		LV3 - 55W	6,850	
		LV4 - 67W	7,900	
LS2	WMC LS2 G2 FSK PE UNV B3	LV1 - 39W	5,550	
		LV2 - 62W	8,260	
		LV3 - 88W	10,700	
		LV4 - 100W	11,500	

Power and
CCT controller



ORDERING GUIDE

EXAMPLE: WMC LS1 G2 FSK

Luminaire Type	Lumen Output	Generation	Voltage	Selectable CCT	Finish	Options
WMC	LS1	G2		FSK		PE UNV B3
☒ WMC Medium Wall Pack Contractor Series	☐ LS1 3860/5400/6850/7900 Lumens - 26W / 41W / 55W / 67W ☐ LS2 5550/8260/10700/11500 Lumens - 39W / 62W / 88W / 100W	☐ G2	☐ BLANK 120-277V ☐ HVU* 347 - 480V	☐ FSK 3000K/4000K /5000K	☐ BLANK** Dark Bronze	☐ BLANK No Option ☐ PE UNV B3 Low Voltage Button Photocell for WMC LS1 model only ☐ PC UNV B3 Button Photocell 120V-277V for WMC LS2 model only ☐ EMD-DH08D-UNV-055 Emergency Battery Backup (8W).

*High Voltage option is not DLC certified.

** For a custom color, please call to place your order.

Due to continuous product improvements, specification and/or equipment updates may change without notice.

SPECIFICATIONS

HOUSING

Die-cast aluminum housing and back-housing.

AMBIENT TEMPERATURE

Suitable for use in -40°C to +40°C (-40°F to 104°F)

MOUNTING

Mounting options include J-Box mounting and Wall mounting, wiring made-up before the lens and front housing.

EFFICACY

Up to 122 lumens per watt (see individual wattage data)

CCT AND CRI

Selectable 3000K, 4000K, and 5000K CCT available; 70CRI

OPTICS

Polycarbonate optical lens with UV stabilizers.

WARRANTY

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

ELECTRICAL

High quality constant-current drivers >90% efficiency and rated for 50/60Hz operation with Standard 120-277V input.

ENERGY DATA

Power factor $\geq 90\%$.


FINISH

Polyester Powder Dark Bronze coat.

CERTIFICATIONS

UL Listed for wet locations. Equivalent to IP65 rating. FCC compliant. RoHs compliant. Design Lights Consortium® (DLC) 5.1 listed product. Please visit www.slgus.com to confirm which versions are qualified.


DIMENSIONS

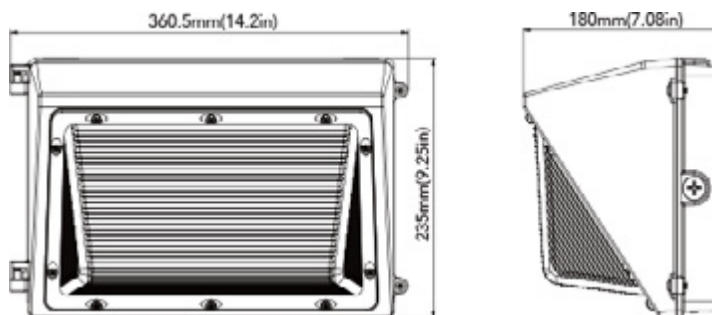

Net Weight
WMC LS1: 6.724lb
WMC LS2: 7.319lb

Due to continuous product improvements, specification and/or equipment updates may change without notice.

PHOTOMETRIC

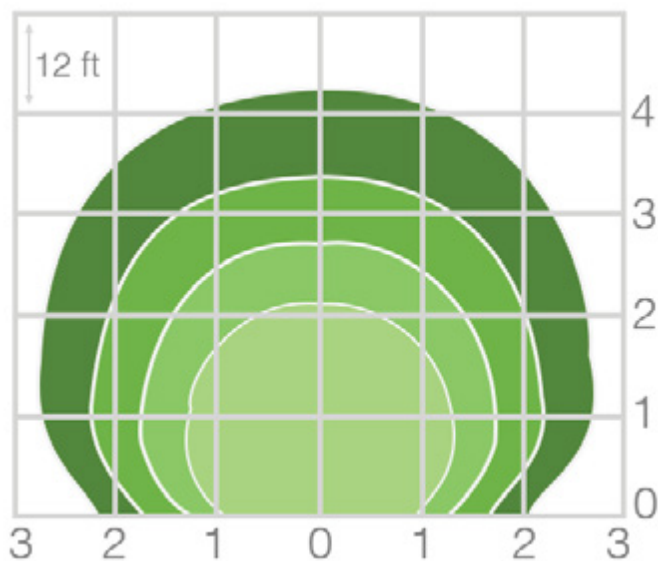

WMC LS1 G2 FSK

Mounting Height	12	14	16	18	20
Multiplier	1.8	1.3	1.0	0.8	0.6

ELECTRICAL LOAD

		Current (A)			
Series Number	Wattage	120V	208V	240V	277V
WMC LS1 G2 FSK	26W	0.22	0.13	0.11	0.09
	41W	0.34	0.20	0.17	0.15
	55W	0.46	0.26	0.23	0.20
	67W	0.56	0.32	0.28	0.24
WMC LS2 G2 FSK	39W	0.33	0.19	0.16	0.14
	62W	0.52	0.30	0.26	0.22
	88W	0.73	0.42	0.37	0.32
	100W	0.83	0.48	0.42	0.36

Due to continuous product improvements, specification and/or equipment updates may change without notice.

PROJECTED LUMINARE MAINTENANCE

WMC LS1 G2 FSK (at 65W)

LM-80 Testing Details	
Total number of units tested per case temp:	30
Number of failures:	0
Number of units measured:	30
Test duration (hours):	9,000
Tested drive current (mA):	100
Tested case temperature 1 (T _c , °C):	55
Tested case temperature 2 (T _c , °C):	105

Test Data for 55°C Case Temp	
Time (hours)	Lumen Maintenance (%)
0	100.00%
1,000	100.23%
2,000	100.03%
3,000	99.82%
4,000	99.59%
5,000	99.34%
6,000	99.11%
7,000	98.90%
8,000	98.69%
9,000	98.49%

Test Data for 105°C Case Temp	
Time (hours)	Lumen Maintenance (%)
0	100.00%
1,000	99.85%
2,000	99.54%
3,000	99.23%
4,000	98.90%
5,000	98.58%
6,000	98.27%
7,000	98.00%
8,000	97.71%
9,000	97.43%

Results	
Time (t) at which to estimate Lumen maintenance (hours):	50,000
Lumen maintenance at time (t) (%):	88.99%
Reported L70 (hours):	>54,000

WMC LS1 G2 FSK (at 100W)

LM-80 Testing Details	
Total number of units tested per case temp:	30
Number of failures:	0
Number of units measured:	30
Test duration (hours):	9,000
Tested drive current (mA):	100
Tested case temperature 1 (T _c , °C):	55
Tested case temperature 2 (T _c , °C):	105

Test Data for 55°C Case Temp	
Time (hours)	Lumen Maintenance (%)
0	100.00%
1,000	100.23%
2,000	100.03%
3,000	99.82%
4,000	99.59%
5,000	99.34%
6,000	99.11%
7,000	98.90%
8,000	98.69%
9,000	98.49%

Test Data for 105°C Case Temp	
Time (hours)	Lumen Maintenance (%)
0	100.00%
1,000	99.85%
2,000	99.54%
3,000	99.23%
4,000	98.90%
5,000	98.58%
6,000	98.27%
7,000	98.00%
8,000	97.71%
9,000	97.43%

Results	
Time (t) at which to estimate Lumen maintenance (hours):	50,000
Lumen maintenance at time (t) (%):	88.29%
Reported L70 (hours):	>54,000

Due to continuous product improvements, specification and/or equipment updates may change without notice.

FLF G1

LED Flood Light Selectable

CONTRACTOR XP

Due to continuous product improvements, specification and/or equipment updates may change without notice.



(Images are shown for illustration purposes only)

FLF LS230 Medium Selectable Flood Light

FLF LS450 Large Selectable Flood Light

The FLF G1 Selectable Flood Light - Flex Series ships in one package featuring mount, photocell, and shorting cap. The new flex series flood light features 4 switch selectable lumen outputs and 3 switch selectable CCT outputs, offering a 12-in-1 solution. Built-in 1/8" jack receptacle makes for easy controls options for optimizing your energy savings.

ORDERING GUIDE

Example: FLF LS230 N77 G1 FSK PSC SFD

Fixture Type	Selectable Lumen Output	Dist. Type	Gen	Voltage	Selectable CCT	Included Accessories	Mount	Finish	Options
• FLF LED Flood Light-Flexible	• LS230 10,000 Lm / 60 W 15,500 Lm / 85 W 20,000 Lm / 110 W 23,000 Lm / 140 W • LS450 20,000 Lm / 120 W 28,500 Lm / 180 W 38,500 Lm / 240 W 45,000 Lm / 300 W • LS600** 46,000 Lm / 300 W 51,000 Lm / 320 W 56,000 Lm / 360 W 60,000 Lm / 400 W	• N77 NEMA 7	• G1 First Generation	• BLANK 120-277 V • HVU* 347-480 V	• FSK 3000K 4000K 5000K	PSC Ships with Photocell and Shorting Cap. BLANK Leave this blank when ordering HVU models - these do not include photocell and shorting cap. PC-2 Twistlock Photocell (for HVU only).	• SFD Slipfitter Mount (Ships in same box) • T Trunnion Mount (Ships in the same box) For HVU models only: • ALF-SFD Slipfitter Mount (Ships Separately) • ALC-T Trunnion Mount (Ships Separately) • ALC-WMB Wall Mount (Ships Separately)	• BLANK Dark Bronze	OSLG sync • MSB-DCE-06-W Bluetooth Plug-in Sensor/Controller OSLG sync • FCB-DCE-02-W Bluetooth Plug-in Controller Node • MS-DCE-09-L7-W Motion sensor • RM06 Remote for MS-DCE-09-L7-W


* HVU option does not ship with PIN receptacle, Photocell, shorting cap, or mount. **LS600 only available in 4000K/5000K CCT

UL Listed for wet locations.
FCC compliant. Design
Lights Consortium® (DLC) 5.1
Premium qualified product.

Series Number	Power Percentage	Wattage	DIST. TYPE	CRI	LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
FLF LS230	100%	140 W	NEMA 7 7x7	70	19,200 Lm	143 Lm/W	23,000 Lm	164 Lm/W	21,000 Lm	150 Lm/W
	80%	120 W	NEMA 7 7x7	70	18,000 Lm	150 Lm/W	20,000 Lm	167 Lm/W	18,500 Lm	154 Lm/W
	60%	90 W	NEMA 7 7x7	70	14,000 Lm	156 Lm/W	15,500 Lm	172 Lm/W	14,500 Lm	161 Lm/W
	40%	60 W	NEMA 7 7x7	70	9,700 Lm	162 Lm/W	10,600 Lm	177 Lm/W	10,000 Lm	167 Lm/W
FLF LS450	100%	300 W	NEMA 7 7x7	70	41,000 Lm	137 Lm/W	45,000 Lm	150 Lm/W	42,000 Lm	140 Lm/W
	80%	240 W	NEMA 7 7x7	70	35,000 Lm	146 Lm/W	38,500 Lm	160 Lm/W	36,000 Lm	150 Lm/W
	60%	180 W	NEMA 7 7x7	70	28,000 Lm	156 Lm/W	30,000 Lm	167 Lm/W	28,500 Lm	158 Lm/W
	40%	120 W	NEMA 7 7x7	70	19,200 Lm	160 Lm/W	21,500 Lm	179 Lm/W	20,000 Lm	167 Lm/W
FLF LS600	100%	400 W	NEMA 7 7x7	70	Not Applicable		60,500 Lm	151 Lm/W	60,000 Lm	150 Lm/W
	80%	360 W	NEMA 7 7x7	70			56,000 Lm	156 Lm/W	55,000 Lm	153 Lm/W
	60%	320 W	NEMA 7 7x7	70			51,000 Lm	159 Lm/W	50,000 Lm	156 Lm/W
	40%	300 W	NEMA 7 7x7	70			47,000 Lm	162 Lm/W	46,000 Lm	159 Lm/W

[illegible]

PHOTOMETRIC

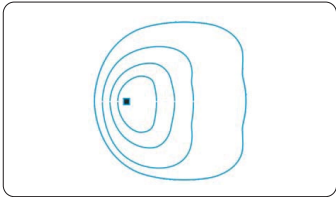

NEMA 77Hx7V

ELECTRICAL LOAD

	Power Setting	Wattage	Current (A)					Current (A)	
			120V	208V	240V	277V		347V	480V
FLF LS230	Low	60 W	0.5	0.29	0.29	0.22	FLF LS230 HVU	0.17	0.13
	Med	85 W	0.71	0.41	0.41	0.31		0.24	0.18
	High	110 W	0.92	0.53	0.53	0.4		0.32	0.23
	Max	140 W	1.17	0.67	0.67	0.51		0.4	0.29
FLF LS450	Low	120 W	1	0.58	0.5	0.43	FLF LS450 HVU	0.35	0.25
	Med	180 W	1.5	0.87	0.75	0.65		0.52	0.38
	High	240 W	2	1.15	1	0.87		0.69	0.5
	Max	300 W	2.5	1.44	1.25	1.08		0.86	0.63
FLF LS600	Low	300 W	2.5	1.44	1.25	1.08	FLF LS600 HVU	0.86	0.63
	Med	320 W	2.7	1.5	1.33	1.16		0.92	0.67
	High	360 W	3	1.73	1.5	1.3		1.04	0.75
	Max	400 W	3.33	1.92	1.66	1.44		1.15	0.83

EPA OF AREA LIGHT

ITEM							
140W	0.3632	0.6849	0.8861	0.7264	1.0481	1.2078	1.0481
300W/400W	0.4758	0.8091	1.059	0.9516	1.2849	1.3923	1.2849

ACCESSORIES



PSC
Twist-lock Photocell (120-277V)
with shorting cap
(ship with all 120-277V FLF models)



PC-2
Twist-lock Photocell (480V)



MSB-DCE-06-W
Plug-in Controller/Sensor



FCB-DCE-02-W
Plug-in Node



MS-DCE-09-L7-W
Weather treated Motion Sensor



DLC PRODUCT ID

MODEL NUMBER	ID NUMBER
FLF LS230 N77 G1 FSK	S-SFDKQU
FLF LS450 N77 G1 FSK	S-ZT7E0I
FLF LS600 N77 G1 FSK	S-5LSWZ2

NOTE: ID numbers apply regardless of mount, finish color, or power type.

PROJECTED LUMINAIRE MAINTENANCE

FLF LS230 G1 FSK (AT 140W)

LM-80 Testing Details	
Total number of units tested per case temp:	30
Number of failures:	0
Number of units measured:	30
Test duration (hours):	12,000
Tested drive current (mA):	120
Tested case temperature 1 (T _c , °C):	85
Tested case temperature 2 (T _c , °C):	105

Test Data for 85°C Case Temp	
Time (hours)	Lumen Maintenance (%)
0	100.00%
1,000	100.10%
2,000	99.87%
3,000	99.56%
4,000	99.14%
5,000	98.66%
6,000	98.24%
7,000	97.87%
8,000	97.54%
9,000	97.26%
10,000	96.93%
11,000	96.74%
12,000	96.58%

Test Data for 105°C Case Temp	
Time (hours)	Lumen Maintenance (%)
0	100.00%
1,000	99.68%
2,000	99.35%
3,000	98.90%
4,000	98.37%
5,000	97.81%
6,000	97.36%
7,000	96.94%
8,000	96.48%
9,000	96.01%
10,000	95.65%
11,000	95.10%
12,000	94.66%

Results	
Time (t) at which to estimate Lumen maintenance (hours):	50,000
Lumen maintenance at time (t) (%):	86.47%
Reported L70 (hours):	>72,000

PROJECTED LUMINAIRE MAINTENANCE (CONTINUED)

FLF LS450 G1 FSK (AT 300W)

LM-80 Testing Details	
Total number of units tested per case temp:	30
Number of failures:	0
Numnber of units measured:	30
Test duration (hours):	12,000
Tested drive current (mA):	120
Tested case temperature 1 (T _c , °C):	85
Tested case temperature 2 (T _c , °C):	105

Test Data for 85°C Case Temp	
Time (hours)	Lumen Maintence (%)
0	100.00%
1,000	100.10%
2,000	99.87%
3,000	99.56%
4,000	99.14%
5,000	98.66%
6,000	98.24%
7,000	97.87%
8,000	97.54%
9,000	97.26%
10,000	96.93%
11,000	96.74%
12,000	96.58%

Test Data for 105°C Case Temp	
Time (hours)	Lumen Maintence (%)
0	100.00%
1,000	99.68%
2,000	99.35%
3,000	98.90%
4,000	98.37%
5,000	97.81%
6,000	97.36%
7,000	96.94%
8,000	96.48%
9,000	96.01%
10,000	95.65%
11,000	95.10%
12,000	94.66%

Results	
Time (t) at which to estimate Lumen maintenance (hours):	50,000
Lumen maintenance at time (t) (%):	86.47%
Reported L70 (hours):	>72,000

CATALOGUE

Catalog Number	Description	Lumens	Watts	CCT	Voltage	Mount
FLF LS230 N77 G1 FSK PSC SFD	FLF Flexible Flood Light, 23000Lm - 140W Max, 4 Level Wattage Adjustable, 120-277VAC, NEMA 7, Gen1, 3000/4000/5000K, With 3 Pin Photocell & Shorting Cap, With Slipfitter Mount, Dark Bronze	Selectable 10,000 - 23,000 Lm	Selectable 60 - 140W	Selectable 3000K - 5000K	120-277V	Included Slipfitter Mount
FLF LS230 N77 G1 FSK PSC T	FLF Flexible Flood Light, 23000Lm - 140W Max, 4 Level Wattage Adjustable, 120-277VAC, NEMA 7, Gen1, 3000/4000/5000K, With 3 Pin Photocell & Shorting Cap, With Trunnion Mount, Dark Bronze	Selectable 10,000 - 23,000 Lm	Selectable 60 - 140W	Selectable 3000K - 5000K	120-277V	Included Trunnion Mount
FLF LS450 N77 G1 FSK PSC SFD	FLF Flexible Flood Light, 45000Lm - 300W Max, 4 Level Wattage Adjustable, 120-277VAC, NEMA 7, Gen1, 3000/4000/5000K, With 3 Pin Photocell & Shorting Cap, With Slipfitter Mount, Dark Bronze	Selectable 20,000 - 45,000 Lm	Selectable 120 - 300W	Selectable 3000K - 5000K	120-277V	Included Slipfitter Mount
FLF LS450 N77 G1 FSK PSC T	FLF Flexible Flood Light, 45000Lm - 300W Max, 4 Level Wattage Adjustable, 120-277VAC, NEMA 7, Gen1, 3000/4000/5000K, With 3 Pin Photocell & Shorting Cap, With Trunnion Mount, Dark Bronze	Selectable 20,000 - 45,000 Lm	Selectable 120 - 300W	Selectable 3000K - 5000K	120-277V	Included Trunnion Mount
FLF LS600 N77 G1 FSK PSC SFD	FLF Flexible Flood Light, 60000Lm - 400W Max, 4 Level Wattage Adjustable, 120-277VAC, NEMA 7, Gen1, 3000/4000/5000K, With 3 Pin Photocell & Shorting Cap, With Slipfitter Mount, Dark Bronze	Selectable 28,000 - 60,000 Lm	Selectable 160 - 400W	Selectable 3000K - 5000K	120-277V	Included Slipfitter Mount
FLF LS600 N77 G1 FSK PSC T	FLF Flexible Flood Light, 60000Lm - 400W Max, 4 Level Wattage Adjustable, 120-277VAC, NEMA 7, Gen1, 3000/4000/5000K, With 3 Pin Photocell & Shorting Cap, With Trunnion Mount, Dark Bronze	Selectable 28,000 - 60,000 Lm	Selectable 160 - 400W	Selectable 3000K - 5000K	120-277V	Included Trunnion Mount
FLF LS230 N77 G1 HVU FSK	FLF Flexible Flood Light, 23000Lm - 140W Max, 4 Level Wattage Adjustable, 347-480VAC, NEMA 7, Gen1, 3000/4000/5000K, Dark Bronze	Selectable 20,000 - 45,000 Lm	Selectable 60 - 140W	Selectable 3000K - 5000K	347-480V	NOT INCLUDED
FLF LS450 N77 G1 HVU FSK	FLF Flexible Flood Light, 45000Lm - 300W Max, 4 Level Wattage Adjustable, 347-480VAC, NEMA 7, Gen1, 3000/4000/5000K, Dark Bronze	Selectable 10,000 - 23,000 Lm	Selectable 120 - 300W	Selectable 3000K - 5000K	347-480V	NOT INCLUDED
FLF LS600 N77 G1 HVU FSK	FLF Flexible Flood Light, 60000Lm - 400W Max, 4 Level Wattage Adjustable, 347-480VAC, NEMA 7, Gen1, 3000/4000/5000K, Dark Bronze	Selectable 28,000 - 60,000 Lm00	Selectable 160 - 400W	Selectable 3000K - 5000K	347-480V	NOT INCLUDED