


Specifications

Power Supply	24V 500W
Size	1500*120*980 mm
Weight	75Kg
Working Temperature	-20 °C ~ 70 °C
Pass Rate	35 Persons/Minute
Pass Width	600-900mm
Operating Speeds	Between 1.2 to 1.6 s
IP Rating	IP44
Communication	Dry Contact/RS485
Motor	Dunke Servo Brushless Motor
Sensor	8 Pairs From Sick
Material	1.5mm SUS304
Side Panel	10mm Transparent Acrylic
Wings Panel	10mm Transparent Acrylic




TG-S2000G

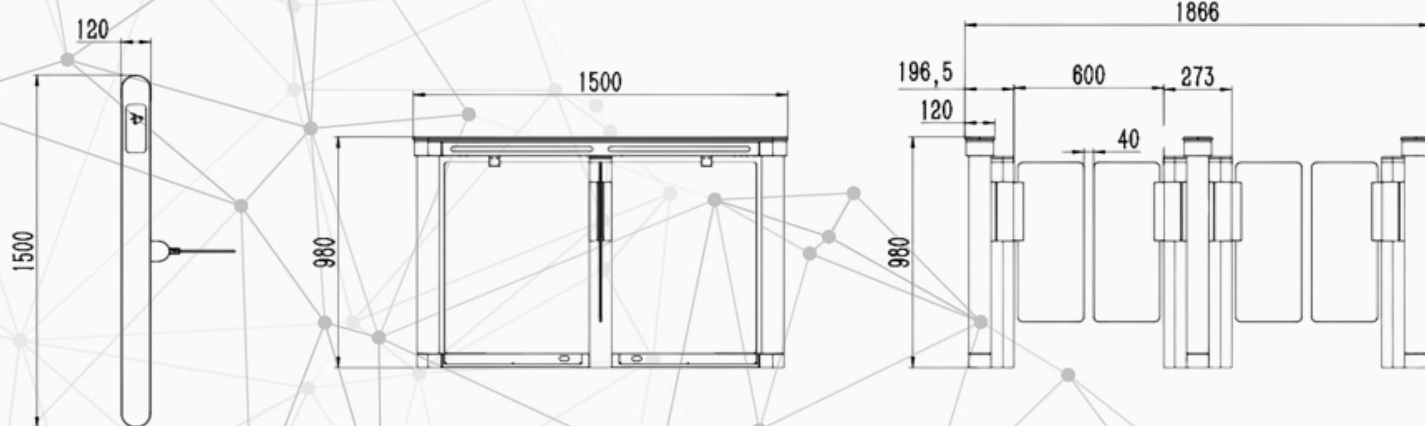

Specifications	
Size	168*168*1000mm (L*W*H)
Pass width	600-900mm
Power	50W
Material	δ=2.2mm SUS304 Round tube
Bar Material	δ=10mm Clean Acrylic
Movement	Servo Swing Gate movement
Drive Unit	200W servo
Power Supply	24V 500W
Control Unit	Servo control system
Communication Interface	Dry contact & RS485
Pass rate 35-50	35-50 persons/minute
Temperature	-20°C~+70°C
Humidity	≤90% No condensation
IP	IP4X
Environment	Indoor and outdoor (outdoor with canopy)



TG-W1000



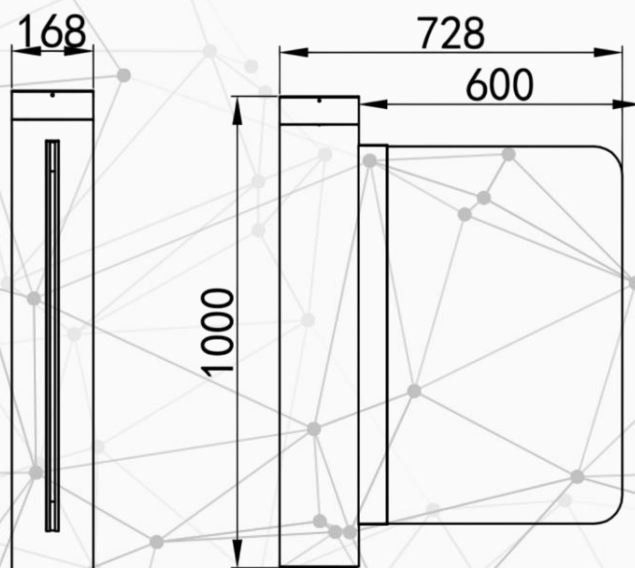


Specifications

Power Supply	AC110V/220V
Size	L=1140, W=290, H=1000
Weight	52 KG
Working Temperature	-28 °C ~ 60 °C
Pass Rate	Maximum 30 persons/minute
Pass Width	750 mm
Operating Speeds	2 s
IP Rating	IP44
Communication	Dry Contact/RS485
Motor	Mechanical
Material	SUS304 Stainless Steel
Barrier Material	Steel



TG-T1000

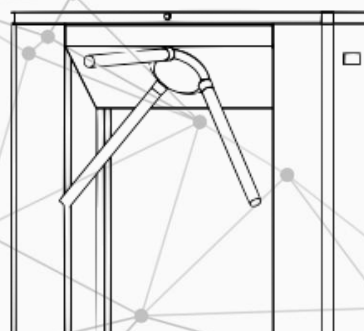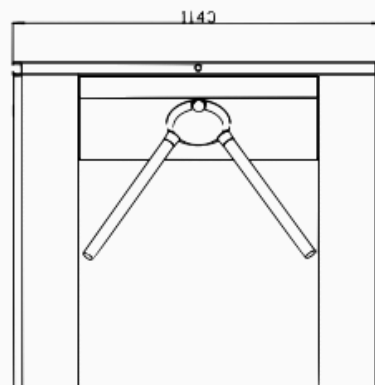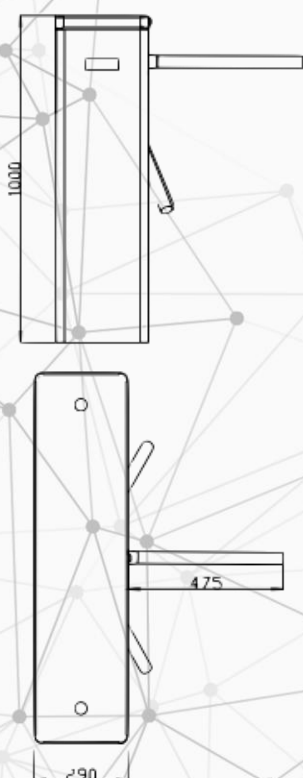


Specifications

Power Supply	50/60 HZ – 110/220 V - 150 W
Size	1500*300*1020 1200*300*1020 (Optional)
Weight	150Kg
Working Temperature	-20°C ~70°C
Pass Rate	45 Persons / Minute
Pass Width	550 mm
Operating Speeds	Between 0.8 to 1.2 s
IP Rating	IP44
Communication	Dry Contact/RS485
Motor	Kormas
Sensor	7 Pairs from Fotek
Status Display	Green : Open / Red: Close
Material	304 Stainless Steel
Wings Panel	12 mm Glass




TG-P2000

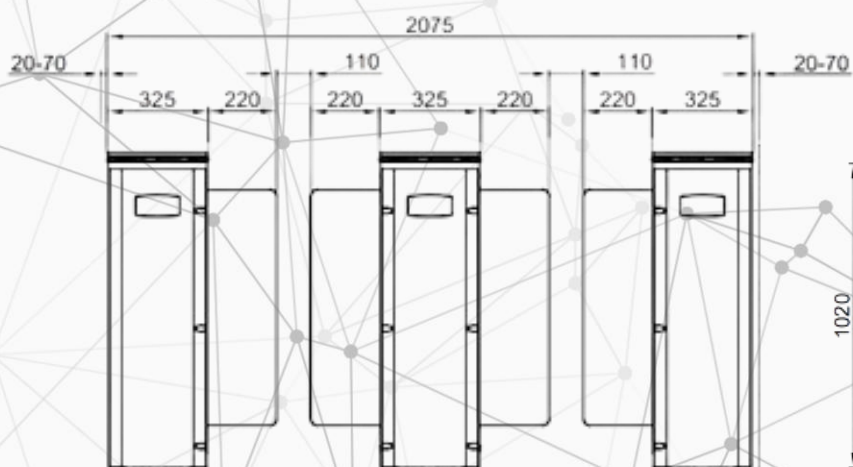


Specifications

Power Supply	50/60 HZ – 110/220 V - 150 W
Size	1200*325*1020 1500*325*1020(Optional)
Weight	150 Kg
Working Temperature	-20°C ~68°C
Pass Rate	40 Persons / Minute
Pass Width	550 mm
Operating Speeds	Between 0.8 to 1.2 s
IP Rating	IP44
Communication	Dry Contact/RS485
Motor	Kormas
Sensor	5 Pairs from Fotek
Status Display	Green : Open / Red: Close
Material	304 Stainless Steel
Wings Panel	Acrylic

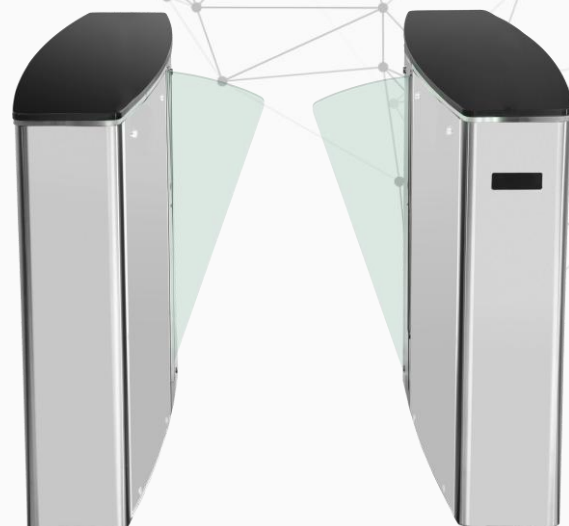

TG-F1000

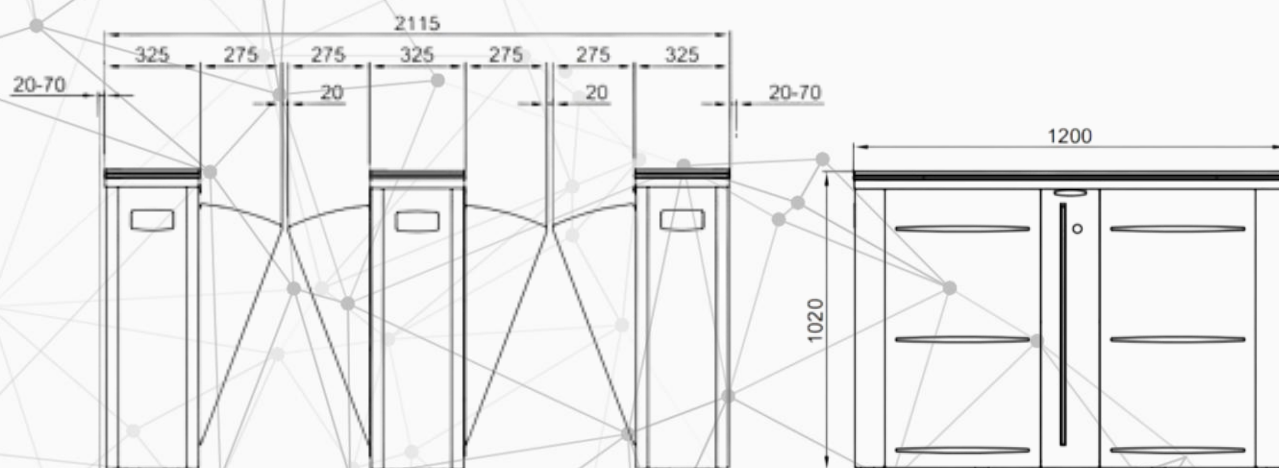

Specifications

Power Supply	24V 500W
Size	1500*120*980 mm
Weight	75Kg
Working Temperature	-20 °C ~ 70 °C
Pass Rate	35 Persons/Minute
Pass Width	900mm
Operating Speeds	Between 1.2 to 1.6 s
IP Rating	IP44
Communication	Dry Contact/RS485
Motor	Dunke Servo Brushless Motor
Sensor	8 Pairs From Sick
Material	1.5mm SUS304
Side Panel	10mm Transparent Acrylic
Wings Panel	10mm Transparent Acrylic



TG-S2000GW

