

Totally Integrated Automation Portal		
--------------------------------------	--	--

PLC_Sorting [CPU 1214C DC/DC/DC]

PLC_Sorting					
General\Project information					
Name	PLC_Sorting	Author	HoraEmbedded	Comment	
Slot	1	Rack	0		
General\Catalog information					
Short designation	CPU 1214C DC/DC/DC	Description	Work memory 150 KB; 24VDC power supply with DI14 x 24VDC SINK/ SOURCE, DQ10 x 24VDC and AI2 on board; 6 high-speed counters and 4 pulse outputs on-board; signal board expands on-board I/O; up to 3 communication modules for serial communication; up to 8 signal modules for I/O expansion; PROFINET IO controller, I-device, transport protocol TCP/IP, secure Open User Communication, S7 communication, Web server, OPC UA: Server DA	Article number	6ES7 214-1AG40-0XB0
Firmware version	V4.6		False		
General\Identification & Maintenance					
Plant designation		Location identifier		Installation date	2026-09-28 22:38:48.935
Additional information					
General\Checksums					
Text lists	FA 70 E8 75 1D 5A 8E 29	Software	19 83 CA F7 F7 BA 96 45		
PROFINET interface [X1]\General					
Name	PROFINET interface_1	Author	HoraEmbedded	Comment	
PROFINET interface [X1]\General\Project information					
Name	DI 14/DQ 10_1	Comment		Name	AI 2_1
Comment					
PROFINET interface [X1]\Ethernet addresses\Interface networked with					
Subnet:	Not connected				
PROFINET interface [X1]\Ethernet addresses\Internet protocol version 4 (IPv4)					
IP configuration	Set IP address in the project	IP address:	192.168.0.1	Subnet mask:	255.255.255.0
Use router	False				
PROFINET interface [X1]\Ethernet addresses\PROFINET					
PROFINET device name is set directly at the device	False	Generate PROFINET device name automatically	True	PROFINET device name:	plc_sorting
Converted name:	plcxbsorting9923	Device number:	0		
PROFINET interface [X1]\Time synchronization					
Enable time synchronization via NTP server	Enable time synchronization via NTP server		IP addresses	Server 1	0.0.0.0
Server 2	0.0.0.0	Server 3	0.0.0.0	Server 4	0.0.0.0
Update interval	10sec			CPU synchronizes the modules of the device.	No synchronization
PROFINET interface [X1]\Digital inputs\Channel0					
Channel address	I100.0	Input filters	6.4 millisec	Enable pulse catch	0
PROFINET interface [X1]\Digital inputs\Channel0\					
Enable rising edge detection	0	Prefix Event Rising Edge	49152	Event name:	0
Hardware interrupt:	0	Rising edge0	Rising edge0		
PROFINET interface [X1]\Digital inputs\Channel0\					
Enable falling edge detection	0	Prefix Event Falling Edge	49280	Event name:	0
Hardware interrupt:	0	Falling edge0	Falling edge0		
PROFINET interface [X1]\Digital inputs\Channel1					
Channel address	I100.1	Input filters	6.4 millisec	Enable pulse catch	0
PROFINET interface [X1]\Digital inputs\Channel1\					
Enable rising edge detection	0	Prefix Event Rising Edge	49153	Event name:	0
Hardware interrupt:	0	Rising edge1	Rising edge1		
PROFINET interface [X1]\Digital inputs\Channel1\					
Enable falling edge detection	0	Prefix Event Falling Edge	49281	Event name:	0
Hardware interrupt:	0	Falling edge1	Falling edge1		
PROFINET interface [X1]\Digital inputs\Channel2					
Channel address	I100.2	Input filters	6.4 millisec	Enable pulse catch	0
PROFINET interface [X1]\Digital inputs\Channel2\					
Enable rising edge detection	0	Prefix Event Rising Edge	49154	Event name:	0
Hardware interrupt:	0	Rising edge2	Rising edge2		
PROFINET interface [X1]\Digital inputs\Channel2\					
Enable falling edge detection	0	Prefix Event Falling Edge	49282	Event name:	0
Hardware interrupt:	0	Falling edge2	Falling edge2		
PROFINET interface [X1]\Digital inputs\Channel3					
Channel address	I100.3	Input filters	6.4 millisec	Enable pulse catch	0
PROFINET interface [X1]\Digital inputs\Channel3\					
Enable rising edge detection	0	Prefix Event Rising Edge	49155	Event name:	0
Hardware interrupt:	0	Rising edge3	Rising edge3		

Totally Integrated Automation Portal						
PROFINET interface [X1]\Digital inputs\Channel3\						
Enable falling edge detection	0	Prefix Event Falling Edge	49283	Event name:	0	
Hardware interrupt:	0	Falling edge3	Falling edge3			
PROFINET interface [X1]\Digital inputs\Channel4						
Channel address	I100.4	Input filters	6.4 millisec	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel4\						
Enable rising edge detection	0	Prefix Event Rising Edge	49156	Event name:	0	
Hardware interrupt:	0	Rising edge4	Rising edge4			
PROFINET interface [X1]\Digital inputs\Channel4\						
Enable falling edge detection	0	Prefix Event Falling Edge	49284	Event name:	0	
Hardware interrupt:	0	Falling edge4	Falling edge4			
PROFINET interface [X1]\Digital inputs\Channel5						
Channel address	I100.5	Input filters	6.4 millisec	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel5\						
Enable rising edge detection	0	Prefix Event Rising Edge	49157	Event name:	0	
Hardware interrupt:	0	Rising edge5	Rising edge5			
PROFINET interface [X1]\Digital inputs\Channel5\						
Enable falling edge detection	0	Prefix Event Falling Edge	49285	Event name:	0	
Hardware interrupt:	0	Falling edge5	Falling edge5			
PROFINET interface [X1]\Digital inputs\Channel6						
Channel address	I100.6	Input filters	6.4 millisec	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel6\						
Enable rising edge detection	0	Prefix Event Rising Edge	49158	Event name:	0	
Hardware interrupt:	0	Rising edge6	Rising edge6			
PROFINET interface [X1]\Digital inputs\Channel6\						
Enable falling edge detection	0	Prefix Event Falling Edge	49286	Event name:	0	
Hardware interrupt:	0	Falling edge6	Falling edge6			
PROFINET interface [X1]\Digital inputs\Channel7						
Channel address	I100.7	Input filters	6.4 millisec	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel7\						
Enable rising edge detection	0	Prefix Event Rising Edge	49159	Event name:	0	
Hardware interrupt:	0	Rising edge7	Rising edge7			
PROFINET interface [X1]\Digital inputs\Channel7\						
Enable falling edge detection	0	Prefix Event Falling Edge	49287	Event name:	0	
Hardware interrupt:	0	Falling edge7	Falling edge7			
PROFINET interface [X1]\Digital inputs\Channel8						
Channel address	I101.0	Input filters	6.4 millisec	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel8\						
Enable rising edge detection	0	Prefix Event Rising Edge	49160	Event name:	0	
Hardware interrupt:	0	Rising edge8	Rising edge8			
PROFINET interface [X1]\Digital inputs\Channel8\						
Enable falling edge detection	0	Prefix Event Falling Edge	49288	Event name:	0	
Hardware interrupt:	0	Falling edge8	Falling edge8			
PROFINET interface [X1]\Digital inputs\Channel9						
Channel address	I101.1	Input filters	6.4 millisec	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel9\						
Enable rising edge detection	0	Prefix Event Rising Edge	49161	Event name:	0	
Hardware interrupt:	0	Rising edge9	Rising edge9			
PROFINET interface [X1]\Digital inputs\Channel9\						
Enable falling edge detection	0	Prefix Event Falling Edge	49289	Event name:	0	
Hardware interrupt:	0	Falling edge9	Falling edge9			
PROFINET interface [X1]\Digital inputs\Channel10						
Channel address	I101.2	Input filters	6.4 millisec	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel10\						
Enable rising edge detection	0	Prefix Event Rising Edge	49162	Event name:	0	
Hardware interrupt:	0	Rising edge10	Rising edge10			
PROFINET interface [X1]\Digital inputs\Channel10\						
Enable falling edge detection	0	Prefix Event Falling Edge	49290	Event name:	0	
Hardware interrupt:	0	Falling edge10	Falling edge10			
PROFINET interface [X1]\Digital inputs\Channel11						
Channel address	I101.3	Input filters	6.4 millisec	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel11\						
Enable rising edge detection	0	Prefix Event Rising Edge	49163	Event name:	0	
Hardware interrupt:	0	Rising edge11	Rising edge11			
PROFINET interface [X1]\Digital inputs\Channel11\						
Enable falling edge detection	0	Prefix Event Falling Edge	49291	Event name:	0	
Hardware interrupt:	0	Falling edge11	Falling edge11			
PROFINET interface [X1]\Digital inputs\Channel12						
Channel address	I101.4	Input filters	6.4 millisec	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel13						
Channel address	I101.5	Input filters	6.4 millisec	Enable pulse catch	0	

Totally Integrated Automation Portal						
PROFINET interface [X1]\Analog inputs\Noise reduction						
Integration time	50 Hz (20 ms)					
PROFINET interface [X1]\Analog inputs\Channel0						
Channel address	IW64	Measurement type	Voltage	Voltage range	0..10 V	
Smoothing	Weak (4 cycles)			Enable overflow diagnostics	1	
PROFINET interface [X1]\Analog inputs\Channel1						
Channel address	IW66	Measurement type	Voltage	Voltage range	0..10 V	
Smoothing	Weak (4 cycles)			Enable overflow diagnostics	1	
PROFINET interface [X1]\Digital outputs						
Reaction to CPU STOP	Use substitute value					
PROFINET interface [X1]\Digital outputs\Channel0						
Channel address	Q0.0	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel1						
Channel address	Q0.1	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel2						
Channel address	Q0.2	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel3						
Channel address	Q0.3	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel4						
Channel address	Q0.4	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel5						
Channel address	Q0.5	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel6						
Channel address	Q0.6	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel7						
Channel address	Q0.7	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel8						
Channel address	Q1.0	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel9						
Channel address	Q1.1	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Operating mode						
IO controller	True	IO system		Device number	0	
IO device	False					
PROFINET interface [X1]\I/O addresses\Input addresses						
Start address	100.0	End address	101.7	Organization block	0	
Process image	0					
PROFINET interface [X1]\I/O addresses\Input addresses						
Start address	64	End address	67	Organization block	0	
Process image	0					
PROFINET interface [X1]\I/O addresses\Output addresses						
Start address	0.0	End address	1.7	Organization block	0	
Process image	0					
PROFINET interface [X1]\Advanced options\Interface options						
Support device replacement without exchangeable medium	True	Permit overwriting of device names of all assigned IO devices	False	Use IEC V2.2 LLDP mode	False	
Keep-Alive connection monitoring:	30s					
PROFINET interface [X1]\Advanced options\Real time settings\IO communication						
Send clock:	1.000ms					
PROFINET interface [X1]\Advanced options\Real time settings\Real time options						
Calculated bandwidth for cyclic IO data:	0.000ms	Calculated bandwidth for cyclic IO data:	0.000%			
PROFINET interface [X1]\Advanced options\Port [X1 P1]\General						
Name	Port_1	Author	ENVY	Comment		
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port interconnection\Local port:						
Local port:	PLC_Sorting\PROFINET interface_1 [X1]\Port_1 [X1 P1]	Medium:	Copper	Cable name:	---	
						

Totally Integrated Automation Portal						
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port interconnection\Partner port:						
	Monitoring of partner port is not possible	Partner port:	Any partner			
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port options\Activate						
Activate this port for use	True					
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port options\Connection						
Transmission rate / duplex:	Automatic	Monitor	False	Enable autonegotiation	True	
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port options\Boundaries						
End of detection of accessible devices	False	End of topology discovery	False	End of the sync domain	False	
PROFINET interface [X1]\Web server access						
Enable Web server for the IP address of this interface	False	The Web server must also be activated in the properties of the PLC.				
High speed counters (HSC)\HSC1\General\Enable						
Enable this high speed counter	0	Enable this high speed counter	0	Enable this high speed counter	0	
Enable this high speed counter	0	Enable this high speed counter	0	Enable this high speed counter	0	
High speed counters (HSC)\HSC1\General\Project information						
Name	HSC_1	Comment		Name	HSC_2	
Comment		Name	HSC_3	Comment		
Name	HSC_4	Comment		Name	HSC_5	
Comment		Name	HSC_6	Comment		
High speed counters (HSC)\HSC1\I/O addresses\Input addresses						
Start address	1000.0	End address	1003.7	Start address	1004.0	
End address	1007.7	Organization block	0	Start address	1008.0	
End address	1011.7	Organization block	0	Process image	0	
Start address	1012.0	End address	1015.7	Organization block	0	
Process image	0	Start address	1016.0	End address	1019.7	
Organization block	0	Process image	0	Start address	1020.0	
End address	1023.7	Organization block	0	Process image	0	
Organization block	0	Process image	0	Process image	0	
Pulse generators (PTO/PWM)\PTO1/PWM1\General\Enable						
Enable this pulse generator	0	Enable this pulse generator	0			
Pulse generators (PTO/PWM)\PTO1/PWM1\General\Project information						
Name	Pulse_1	Comment		Name	Pulse_2	
Comment						
Pulse generators (PTO/PWM)\PTO1/PWM1\I/O addresses\Output addresses						
Start address	1000.0	End address	1001.7	Start address	1002.0	
End address	1003.7	Organization block	0	Organization block	0	
Process image	0	Process image	0			
Startup						
Startup after POWER ON	Warm restart - mode before POWER OFF	Comparison preset to actual configuration	Startup CPU even if mismatch	Configuration time	60000ms	
OBs should be interruptible	1					
Cycle						
Cycle monitoring time [ms]	150ms			Enable minimum cycle time for cyclic OBs	0	
Minimum cycle time	1ms					
Communication load						
Cycle load due to communication [%]	20%					
System and clock memory\System memory bits						
Enable the use of system memory byte	0	Address of system memory byte (MBx)	1	First cycle		
Diagnostic status changed		Always 1 (high)		Always 0 (low)		
System and clock memory\Clock memory bits						
Enable the use of clock memory byte	0	Address of clock memory byte (MBx)	0	10 Hz clock		
5 Hz clock		2.5 Hz clock		2 Hz clock		
1.25 Hz clock		1 Hz clock		0.625 Hz clock		
0.5 Hz clock						
Web server\General						
Activate Web server on all modules of this device	False	Permit access only with HTTPS	True			
Web server\Automatic update						
Enable automatic update	True	Update interval	0s			
Web server\User management						
User name			User rights			
Everybody						
Web server\User-defined web pages						
Application name	HTML source path	Default HTML page	Files with dynamic content	Web DB number	Fragment DB number	
		index.htm	.htm;.html	333	334	
Web server\Overview of interfaces						
Device		Interface		Enabled web server access		
PLC_Sorting		PROFINET interface_1		False		

Totally Integrated Automation Portal

User interface languages

Assign project language

User interface languages

English (United States)

English (United States)

English (United States)

English (United States)

English (United States)

English (United States)

English (United States)

German

English

French

Spanish

Italian

Chinese (simplified)

Time of day\Local time

Time zone

(UTC +01:00) Berlin, Bern, Brussels, Rome, Stockholm, Vienna

Time of day\Daylight saving time

Activate daylight saving time

1

Difference between standard and daylight saving time

60min

Time of day\Daylight saving time\Start of daylight saving time

Starting week of the month:

Last

Sunday

in

March

at

1:00 a.m.

Time of day\Daylight saving time\Start of standard time

Last

Sunday

in

October

at

2:00 a.m.

Protection & Security

Level of protection

No protection

Protection & Security\Connection mechanisms

Permit access with PUT/GET communication from remote partner

True

Protection & Security\Security event

Summarize diagnostics in case of high message volume

True

Length of an interval

20

Unit

seconds

Protection & Security\External load memory

Disable copying from internal load memory to external load memory

False

Advanced configuration\DnsParameterConfigurationMenu

The Tree-Node DnsConfigurationMenu was not filled by some ACF

Advanced configuration\Configuration control\Configuration control for central configuration

Allow to reconfigure the device via the user program

0

Advanced configuration\SNMP\SNMP configuration (Simple Network Management Protocol).

Activate SNMP

False

Configuration control\Configuration control for central configuration

Allow to reconfigure the device via the user program

0

Connection resources\

	Station resources - Reserved - Maximum	Station resources - Reserved - Configured	Station resources - Dynamic - Configured	Module resources - PLC_Sorting [CPU 1214C DC/DC/DC] - Configured
Maximum number of resources:		34	34	68
	Maximum	Configured	Configured	Configured
PG communication:	4	-	-	-
HMI communication:	12	0	0	0
S7 communication:	8	0	0	0
Open user communication:	8	0	0	0
Web communication:	2	-	-	-
OPC UA client/server communication:	0	-	-	-
Other communication:	-	-	0	0
Total resources used:		0	0	0
Available resources:		34	34	68

Overview of addresses\Overview of addresses\Overview of addresses

Inputs

True

Outputs

True

Address gaps

False

Slot

True

Totally Integrated Automation Portal											
Type	Addr. from	Addr. to	Module	PIP	Device name	Device number	Size	Master / IO system	Rack	Slot	
I	64	67	AI 2_1	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 2	
I	1000	1003	HSC_1	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 16	
I	1004	1007	HSC_2	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 17	
I	1008	1011	HSC_3	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 18	
I	1012	1015	HSC_4	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 19	
I	1016	1019	HSC_5	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 20	
I	1020	1023	HSC_6	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 21	
O	1000	1001	Pulse_1	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 32	
O	1002	1003	Pulse_2	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 33	
O	1004	1005	Pulse_3	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 34	
O	1006	1007	Pulse_4	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 35	
I	100	101	DI 14/DQ 10_1	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 1	
O	0	1	DI 14/DQ 10_1	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 1	

PLC_Sorting [CPU 1214C DC/DC/DC] / Program blocks

Main [OB1]

Main Properties

General

Name	Main	Number	1	Type	OB	Language	LAD
Numbering	Automatic						

Information


Title	"Main Program Sweep (Cycle)"	Author		Comment		Family	
Version	0.1	User-defined ID					

Name	Data type	Default value	Comment
▼ Input			
Initial_Call	Bool		Initial call of this OB
Remanence	Bool		=True, if remanent data are available
Temp			
Constant			


Network 1:




Network 2:

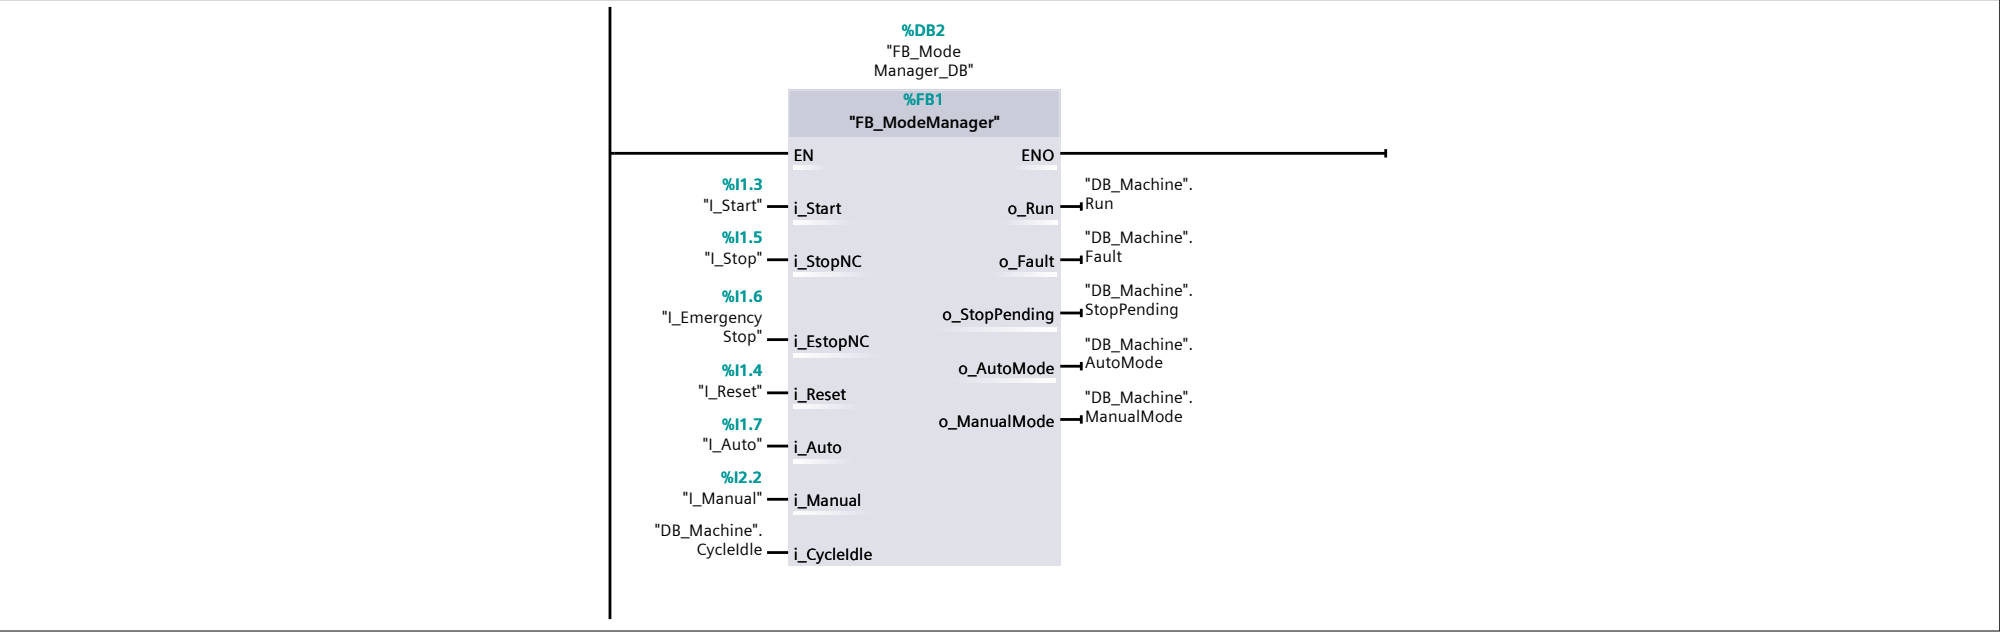

Network 3:

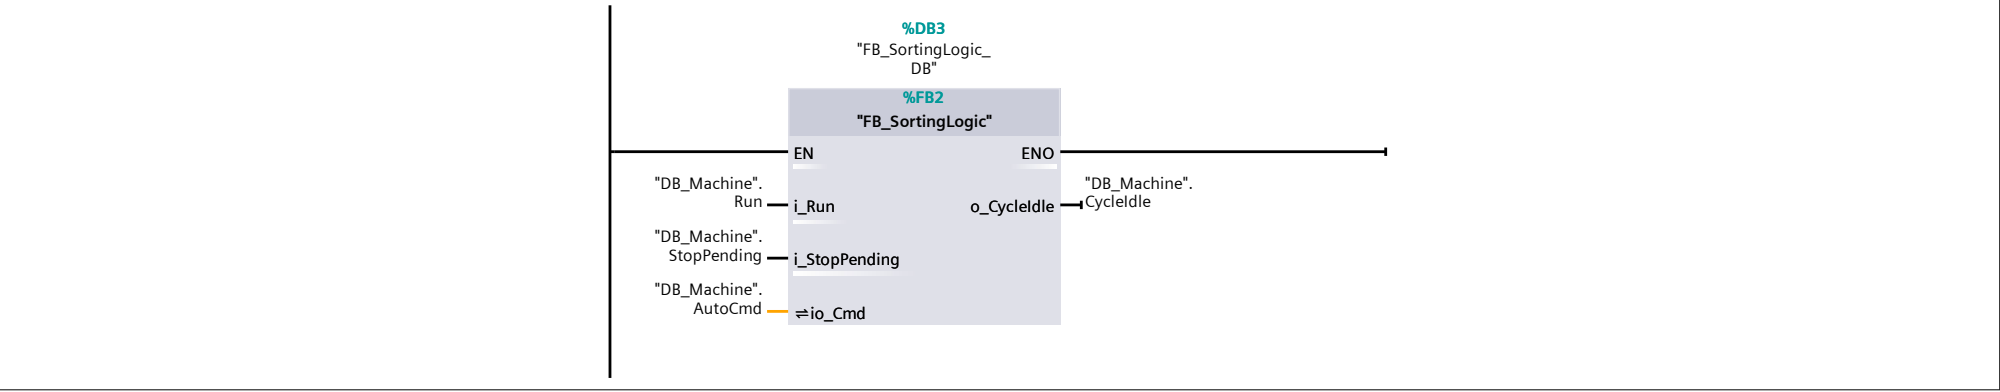

Network 4:

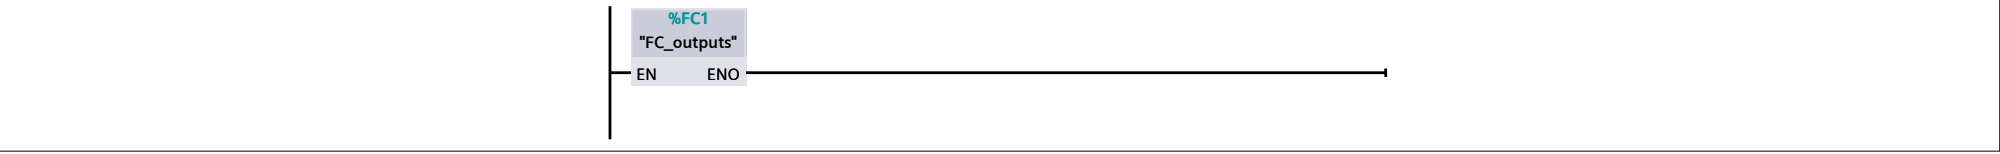

PLC_Sorting [CPU 1214C DC/DC/DC] / Program blocks

MHJ-PLC-Lab-Function-S71200 [FC9000]

MHJ-PLC-Lab-Function-S71200 Properties							
General							
Name	MHJ-PLC-Lab-Function-S71200	Number	9000	Type	FC	Language	SCL
Numbering	Manual						
Information							
Title		Author		Comment		Family	
Version	0.1	User-defined ID					

Name	Data type	Default value	Comment
Input			
Output			
InOut			
▼ Temp			
rdTimeReturn	Int		
▼ outputTime	DTL		
YEAR	UInt		
MONTH	USInt		
DAY	USInt		
WEEKDAY	USInt		
HOURL	USInt		
MINUTE	USInt		
SECOND	USInt		
NANOSECOND	UDInt		
SyncVal	Byte		
forVal	Int		
forVal_2	Int		
Value	Byte		
▼ Constant			
CompVal	Byte	16#34	
Value_01	Byte	16#11	
Value_01_DW	DWord	16#A165_D992	
Value_02_DW	DWord	16#58BE_4401	
▼ Return			
MHJ-PLC-Lab-Function-S71200	Void		

```
0001
0002 #Value:=PEEK(area := 16#82,
0003     dbNumber := 0,
0004     byteOffset := 511);
0005 #Value := #Value + 1;
0006
0007 POKE(area := 16#82,
0008     dbNumber := 0,
0009     byteOffset := 511,
0010     value := #Value);
0011
0012 POKE(area:=16#81,
0013     dbNumber:=0,
0014     byteOffset:=1016,
0015     value:=#Value_01_DW);
0016 POKE(area := 16#81,
0017     dbNumber := 0,
0018     byteOffset := 1020,
0019     value := #Value_02_DW);
0020
0021 POKE(area := 16#81,
0022     dbNumber := 0,
0023     byteOffset := 511,
0024     value := B#16#00);
0025
0026 FOR #forVal := 0 TO 120 DO
0027     FOR #forVal_2:=0 TO 10 DO
0028         #rdTimeReturn:=RD_SYS_T(#outputTime);
0029         #rdTimeReturn := WR_SYS_T(#outputTime);
0030         #rdTimeReturn := RD_SYS_T(#outputTime);
0031         #rdTimeReturn := WR_SYS_T(#outputTime);
0032     END_FOR;
0033     #SyncVal:= PEEK(area := 16#81,
0034         dbNumber := 0,
0035         byteOffset := 511);
0036     IF #SyncVal = #CompVal THEN
0037         GOTO M_1;
0038     END_IF;
0039 END_FOR;
0040 RETURN;
0041
0042 M_1:
0043 POKE(area := 16#81,
```

Totally Integrated Automation Portal																																										
0044 dbNumber := 0, 0045 byteOffset := 511, 0046 value := B#16#0); 0047 0048 0049																																										
<table><tr><th>Symbol</th><th>Address</th><th>Type</th><th>Comment</th></tr><tr><td>#CompVal</td><td>16#34</td><td>Byte</td><td></td></tr><tr><td>#forVal</td><td></td><td>Int</td><td></td></tr><tr><td>#forVal_2</td><td></td><td>Int</td><td></td></tr><tr><td>#outputTime</td><td></td><td>DTL</td><td></td></tr><tr><td>#rdTimeReturn</td><td></td><td>Int</td><td></td></tr><tr><td>#SyncVal</td><td></td><td>Byte</td><td></td></tr><tr><td>#Value</td><td></td><td>Byte</td><td></td></tr><tr><td>#Value_01_DW</td><td>16#A165_D992</td><td>DWord</td><td></td></tr><tr><td>#Value_02_DW</td><td>16#58BE_4401</td><td>DWord</td><td></td></tr></table>			Symbol	Address	Type	Comment	#CompVal	16#34	Byte		#forVal		Int		#forVal_2		Int		#outputTime		DTL		#rdTimeReturn		Int		#SyncVal		Byte		#Value		Byte		#Value_01_DW	16#A165_D992	DWord		#Value_02_DW	16#58BE_4401	DWord	
Symbol	Address	Type	Comment																																							
#CompVal	16#34	Byte																																								
#forVal		Int																																								
#forVal_2		Int																																								
#outputTime		DTL																																								
#rdTimeReturn		Int																																								
#SyncVal		Byte																																								
#Value		Byte																																								
#Value_01_DW	16#A165_D992	DWord																																								
#Value_02_DW	16#58BE_4401	DWord																																								

Totally Integrated Automation Portal

PLC_Sorting [CPU 1214C DC/DC/DC] / Program blocks

DB_Machine [DB1]

DB_Machine Properties

General

Name	DB_Machine	Number	1	Type	DB	Language	DB
Numbering	Automatic						

Information

Title		Author		Comment		Family	
Version	0.1	User-defined ID					

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
Run	Bool	false	False	True	True	True	False		
Fault	Bool	false	False	True	True	True	False		
StopPending	Bool	false	False	True	True	True	False		
AutoMode	Bool	false	False	True	True	True	False		
ManualMode	Bool	false	False	True	True	True	False		
CycleIdle	Bool	false	False	True	True	True	False		
CountLeft	DInt	0	False	True	True	True	False		
CountRight	DInt	0	False	True	True	True	False		
CountTotal	DInt	0	False	True	True	True	False		
▼ AutoCmd	"UDT_ActuatorCmd"		False	True	True	True	False		
EntryConveyor	Bool	false	False	True	True	True	False		
FeederConveyor	Bool	false	False	True	True	True	False		
LeftConveyor	Bool	false	False	True	True	True	False		
RightConveyor	Bool	false	False	True	True	True	False		
Load	Bool	false	False	True	True	True	False		
Unload	Bool	false	False	True	True	True	False		
Turn	Bool	false	False	True	True	True	False		
Emit	Bool	false	False	True	True	True	False		
RemoverLeft	Bool	true	False	True	True	True	False		
RemoverRight	Bool	true	False	True	True	True	False		
▼ ManCmd	"UDT_ActuatorCmd"		False	True	True	True	False		
EntryConveyor	Bool	false	False	True	True	True	False		
FeederConveyor	Bool	false	False	True	True	True	False		
LeftConveyor	Bool	false	False	True	True	True	False		
RightConveyor	Bool	false	False	True	True	True	False		
Load	Bool	false	False	True	True	True	False		
Unload	Bool	false	False	True	True	True	False		
Turn	Bool	false	False	True	True	True	False		
Emit	Bool	false	False	True	True	True	False		
RemoverLeft	Bool	true	False	True	True	True	False		
RemoverRight	Bool	true	False	True	True	True	False		

PLC_Sorting [CPU 1214C DC/DC/DC] / Program blocks

FB_ModeManager [FB1]

FB_ModeManager Properties							
General							
Name	FB_ModeManager	Number	1	Type	FB	Language	LAD
Numbering	Automatic						
Information							
Title		Author		Comment		Family	
Version	0.1	User-defined ID					

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion				Comment
▼ Input												
i_Start	Bool	false	Non-retain	True	True	True	False					
i_StopNC	Bool	false	Non-retain	True	True	True	False					
i_EstopNC	Bool	false	Non-retain	True	True	True	False					
i_Reset	Bool	false	Non-retain	True	True	True	False					
i_Auto	Bool	false	Non-retain	True	True	True	False					
i_Manual	Bool	false	Non-retain	True	True	True	False					
i_CycleIdle	Bool	false	Non-retain	True	True	True	False					
▼ Output												
o_Run	Bool	false	Non-retain	True	True	True	False					
o_Fault	Bool	false	Non-retain	True	True	True	False					
o_StopPending	Bool	false	Non-retain	True	True	True	False					
o_AutoMode	Bool	false	Non-retain	True	True	True	False					
o_ManualMode	Bool	false	Non-retain	True	True	True	False					
InOut												
▼ Static												
s_EdgeStart	Bool	false	Non-retain	True	True	True	False					
s_EdgeReset	Bool	false	Non-retain	True	True	True	False					
▼ Temp												
t_StartPulse	Bool											
t_ResetPulse	Bool											
Constant												


Network 1:




Network 2:




Network 3:

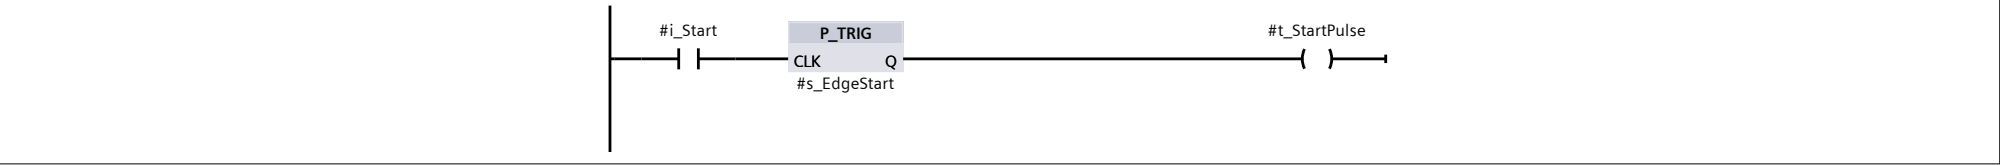


Network 4:

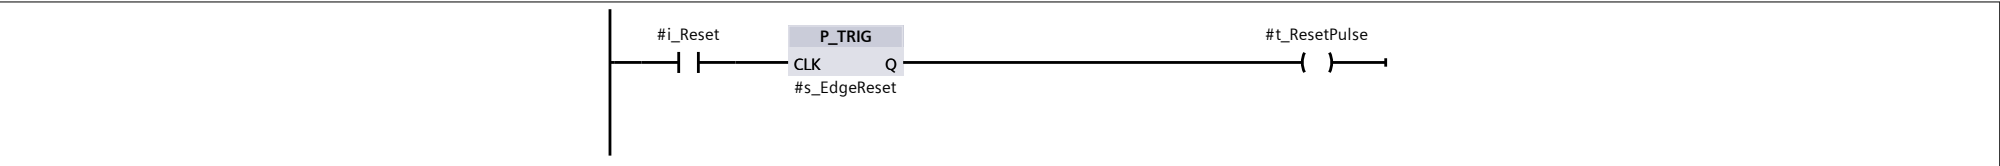


Network 5:

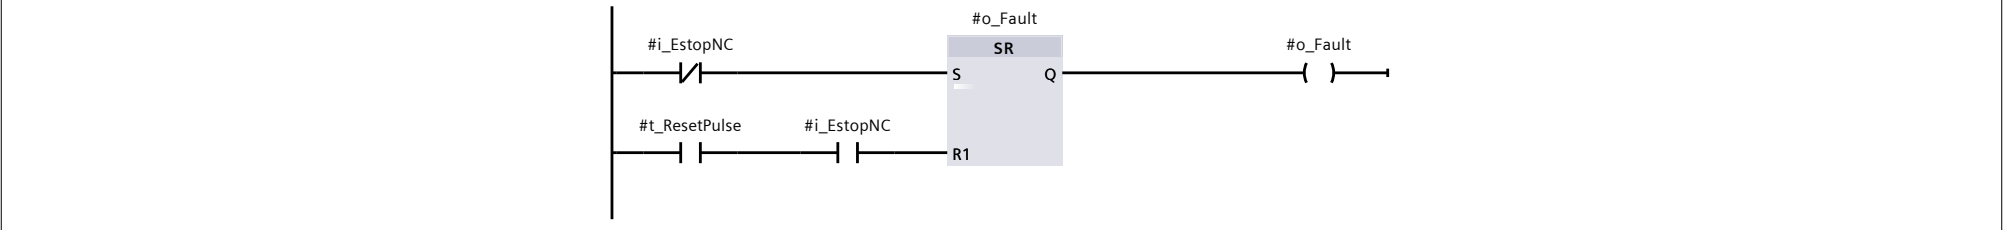

Network 6:

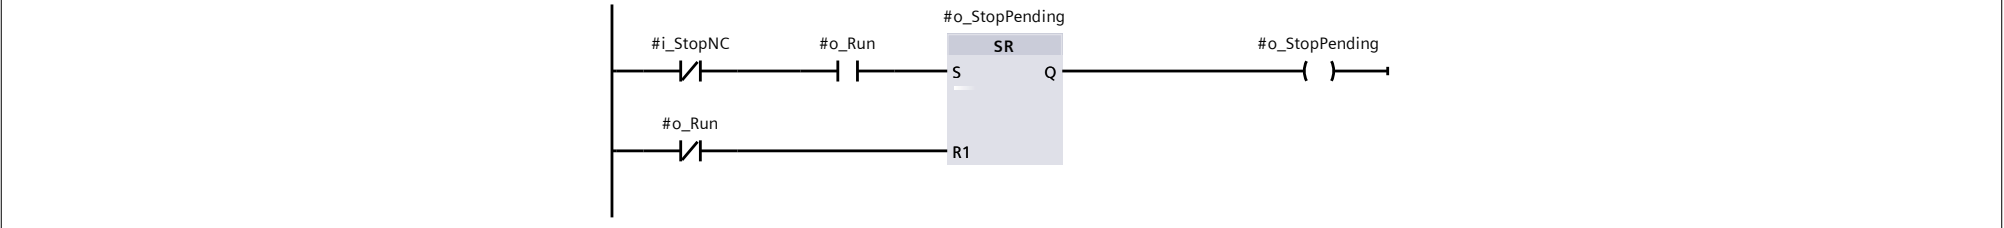

Network 7:

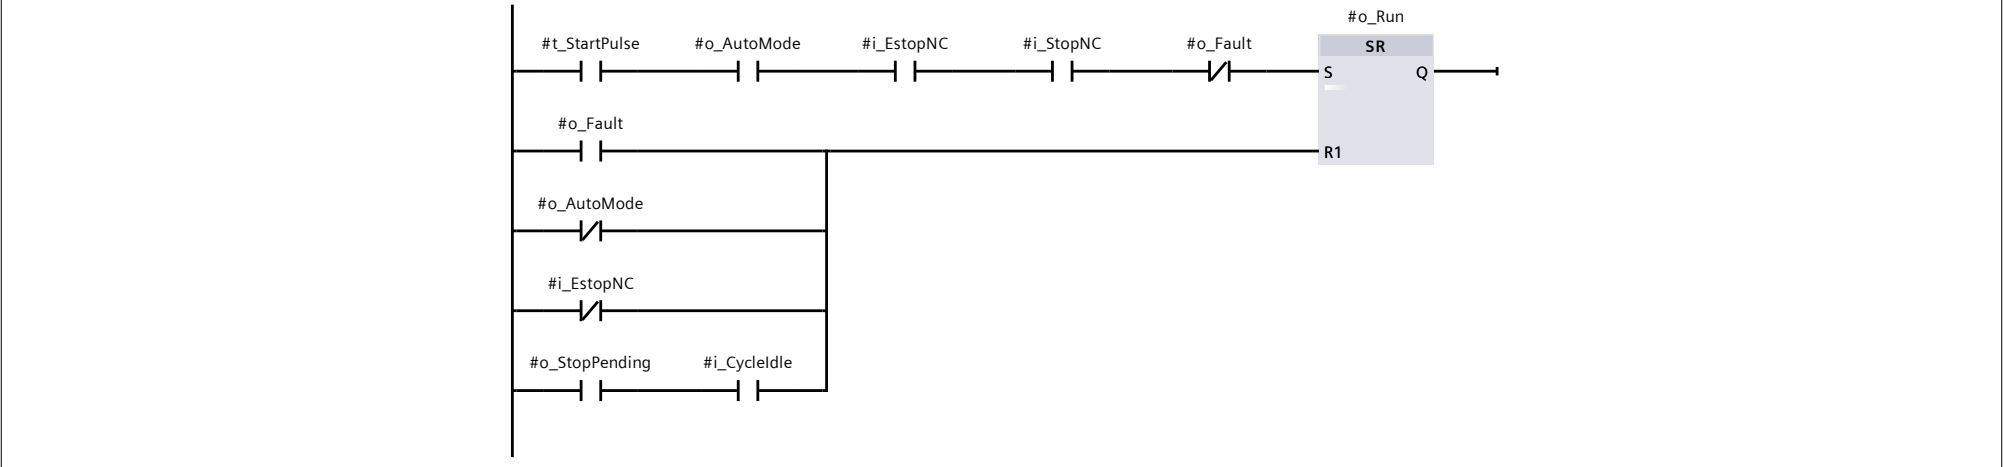

PLC_Sorting [CPU 1214C DC/DC/DC] / Program blocks

FB_SortingLogic [FB2]

FB_SortingLogic Properties							
General							
Name	FB_SortingLogic	Number	2	Type	FB	Language	LAD
Numbering	Automatic						
Information							
Title		Author		Comment		Family	
Version	0.1	User-defined ID					

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion				Comment
▼ Input												
i_Run	Bool	false	Non-retain	True	True	True	False					
i_StopPending	Bool	false	Non-retain	True	True	True	False					
▼ Output												
o_CycleIdle	Bool	false	Non-retain	True	True	True	False					
▼ InOut												
▼ io_Cmd	"UDT_Actua-torCmd"			False	False	False	False					
EntryConveyor	Bool			False	False	False	False					
FeederConveyor	Bool			False	False	False	False					
LeftConveyor	Bool			False	False	False	False					
RightConveyor	Bool			False	False	False	False					
Load	Bool			False	False	False	False					
Unload	Bool			False	False	False	False					
Turn	Bool			False	False	False	False					
Emit	Bool			False	False	False	False					
RemoverLeft	Bool			False	False	False	False					
RemoverRight	Bool			False	False	False	False					
Static												
Temp												
Constant												

Network 1: Placeholder: sorting sequence implemented in the next version



PLC_Sorting [CPU 1214C DC/DC/DC] / Program blocks

FC_outputs [FC1]


FC_outputs Properties							
General							
Name	FC_outputs	Number	1	Type	FC	Language	LAD
Numbering	Automatic						
Information							
Title		Author		Comment		Family	
Version	0.1	User-defined ID					

Name	Data type	Default value	Comment
Input			
Output			
InOut			
▼ Temp			
t_Enable	Bool		
Constant			
▼ Return			
FC_outputs	Void		


Network 1:




Network 2:

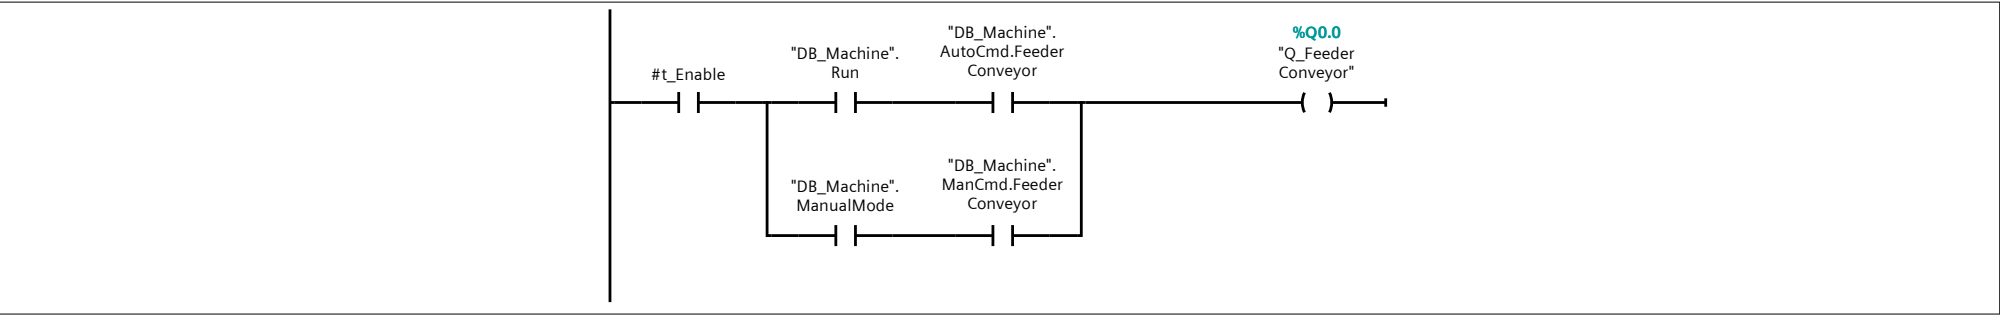


Network 3:

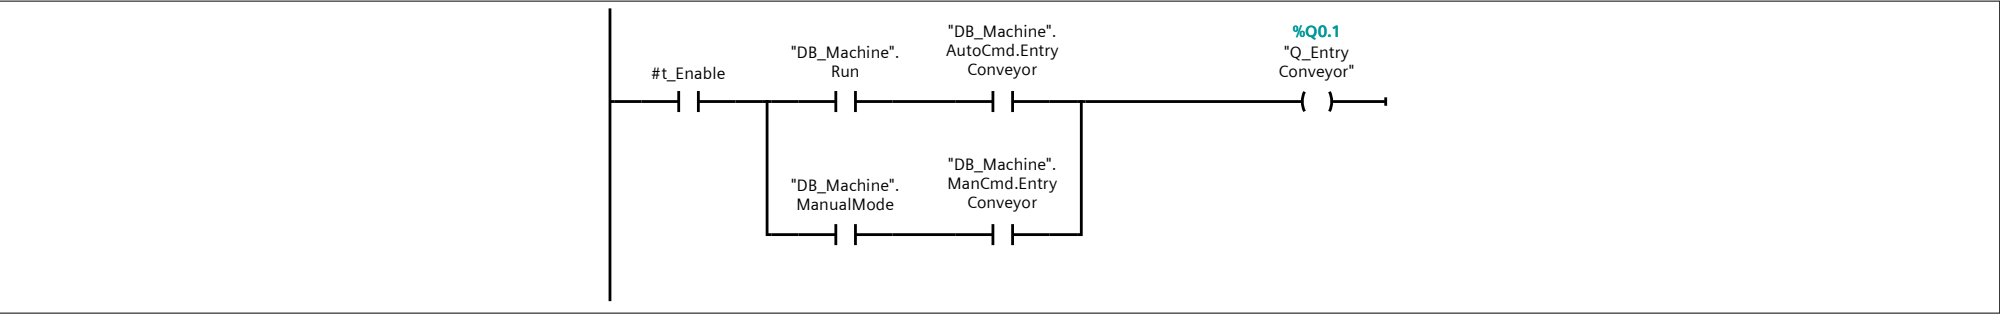


Network 4:

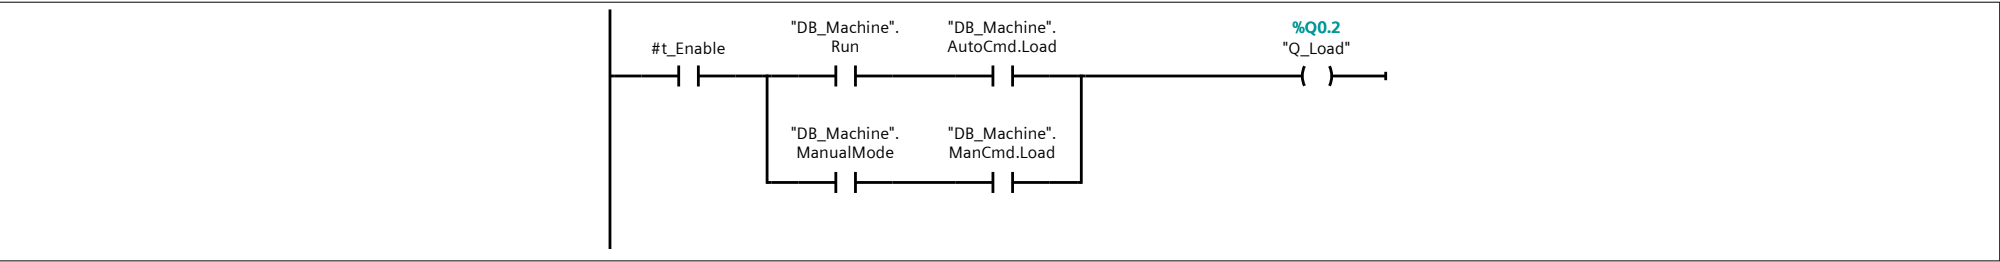


Network 5:

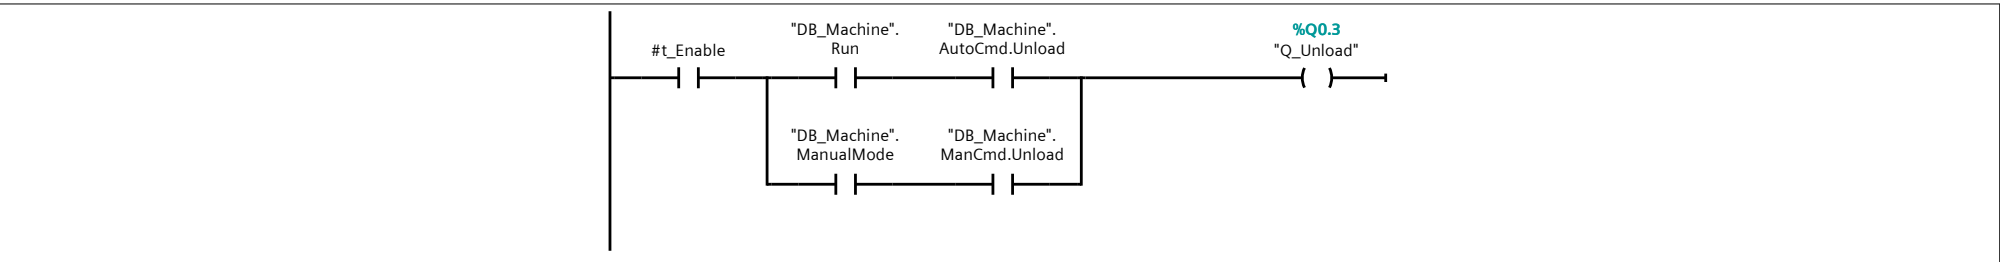


Network 6:

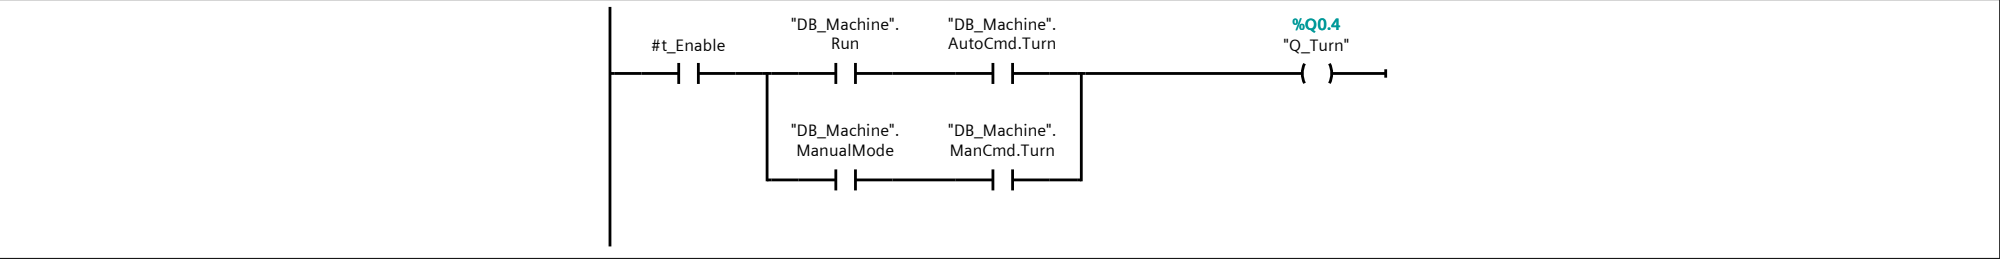


Network 7:

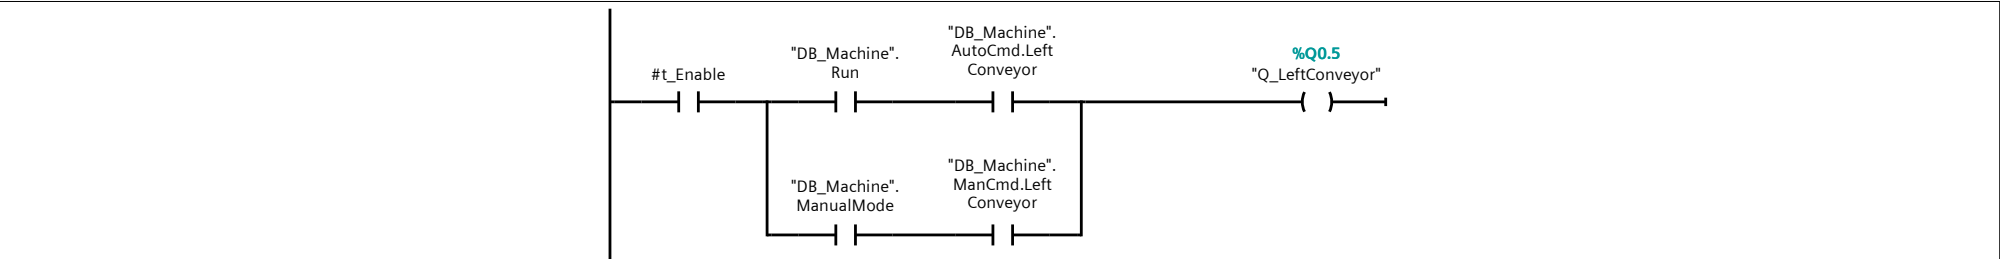


Network 8:

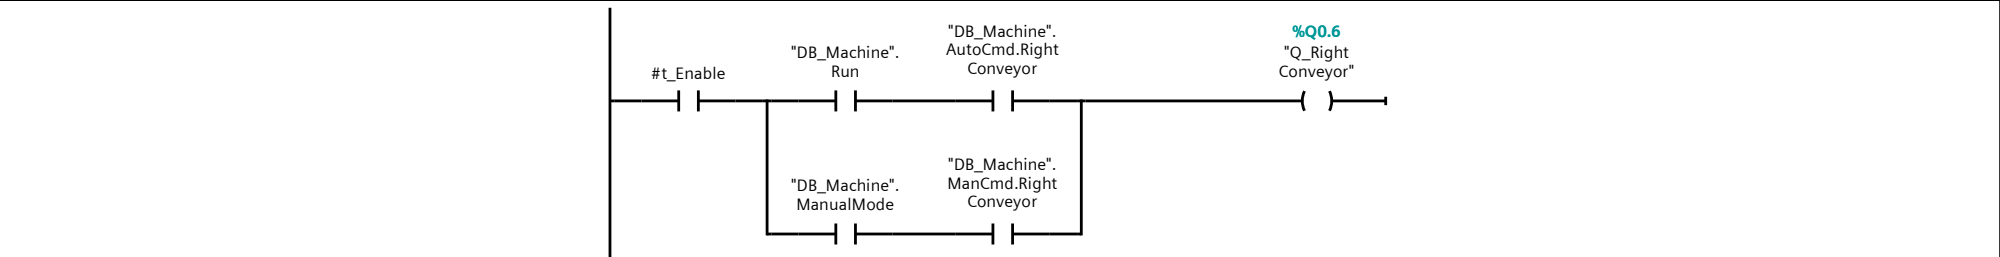


Network 9:

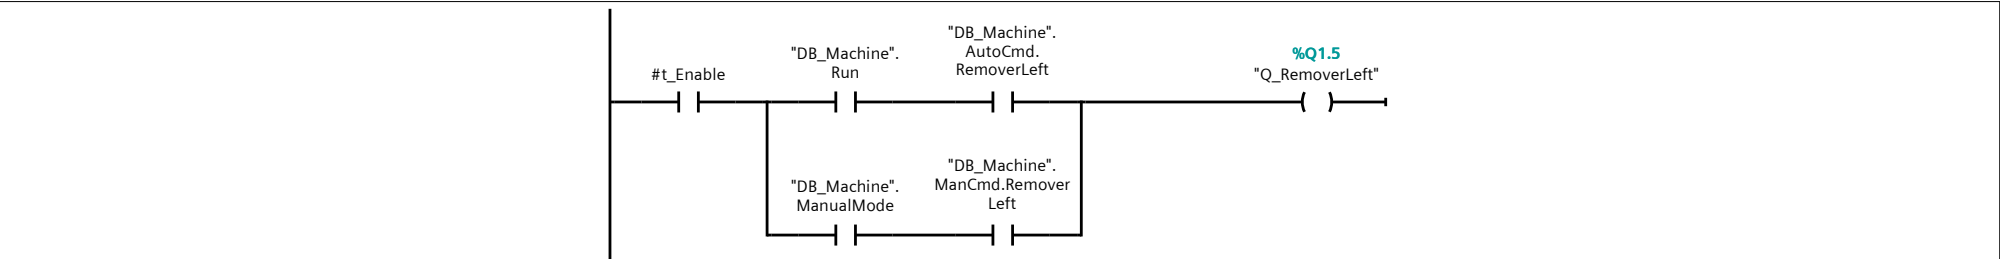


Network 10:

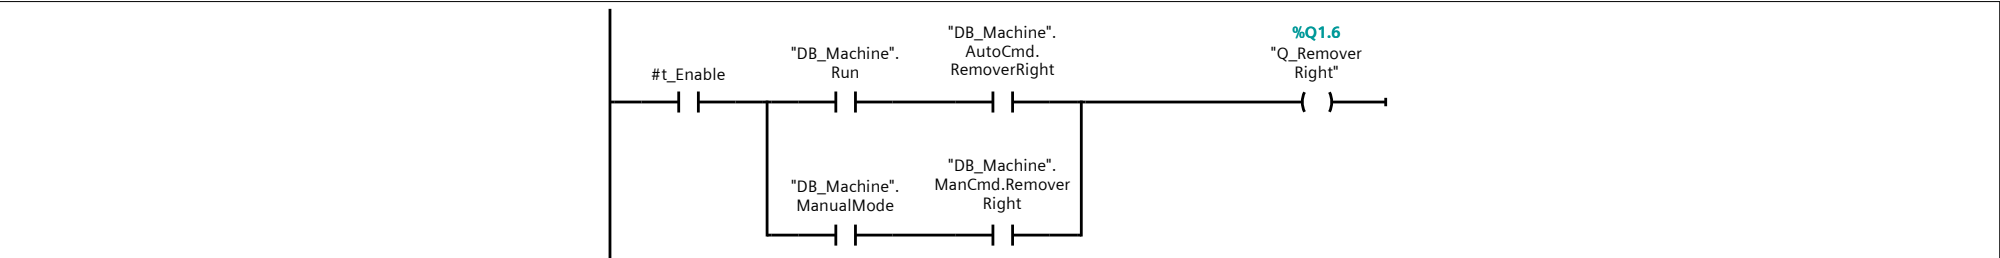

Network 11:

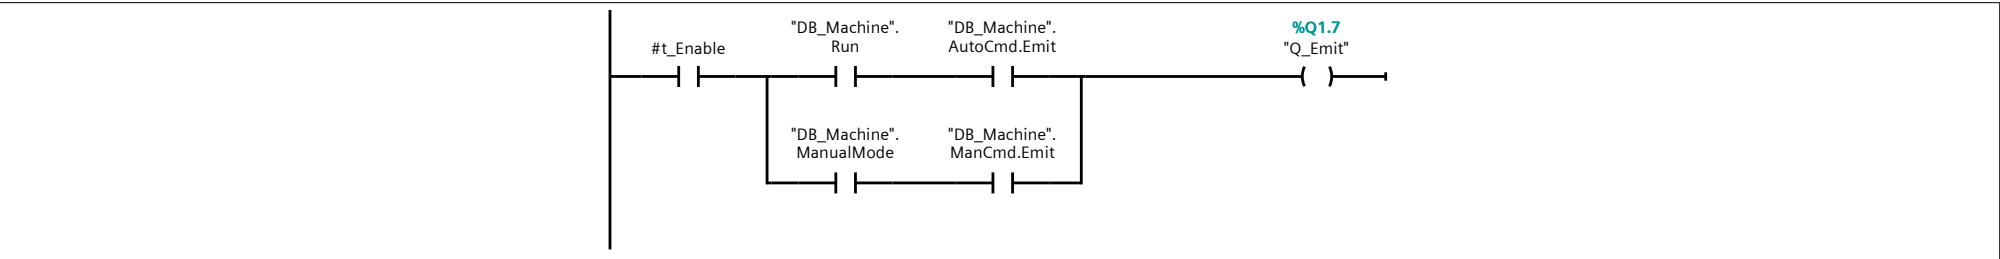

Network 12:

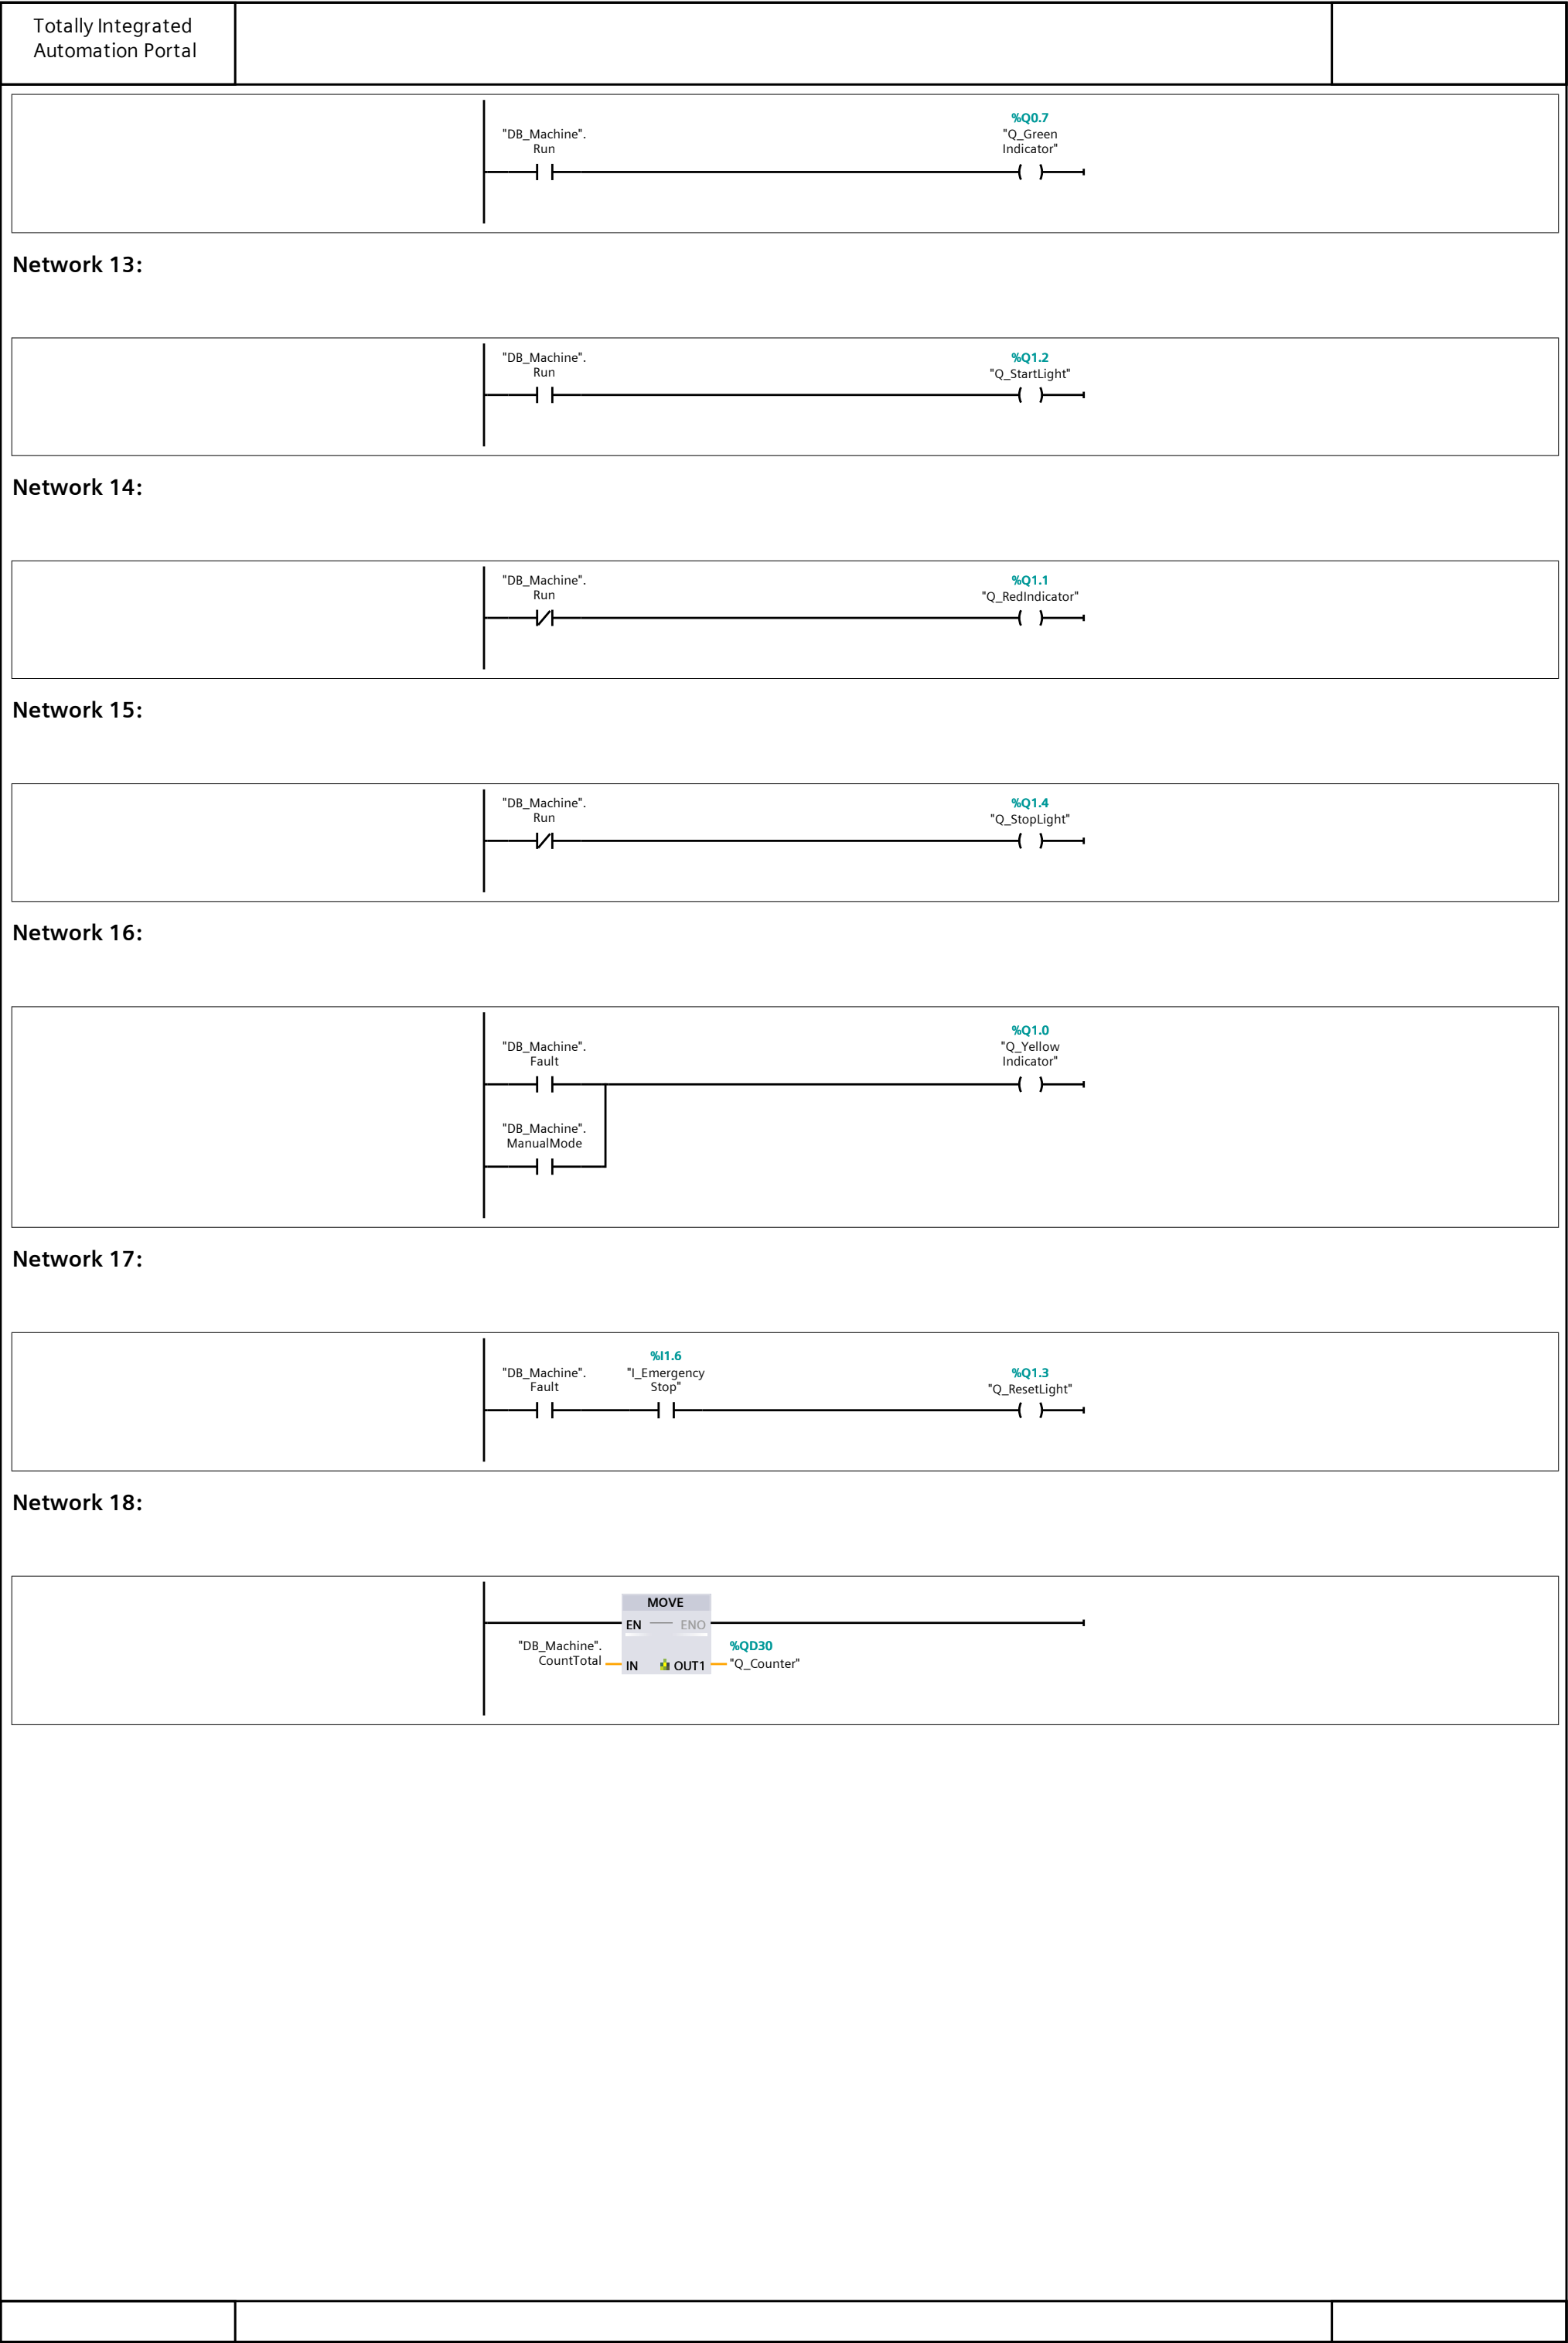

Totally Integrated Automation Portal

PLC_Sorting [CPU 1214C DC/DC/DC] / Program blocks

FB_ModeManager_DB [DB2]

FB_ModeManager_DB Properties

General

Name	FB_ModeManager_DB	Number	2	Type	DB	Language	DB
Numbering	Automatic						

Information

Title		Author		Comment		Family	
Version	0.1	User-defined ID					

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Input									
i_Start	Bool	false	False	True	True	True	False		
i_StopNC	Bool	false	False	True	True	True	False		
i_EstopNC	Bool	false	False	True	True	True	False		
i_Reset	Bool	false	False	True	True	True	False		
i_Auto	Bool	false	False	True	True	True	False		
i_Manual	Bool	false	False	True	True	True	False		
i_CycleIdle	Bool	false	False	True	True	True	False		
▼ Output									
o_Run	Bool	false	False	True	True	True	False		
o_Fault	Bool	false	False	True	True	True	False		
o_StopPending	Bool	false	False	True	True	True	False		
o_AutoMode	Bool	false	False	True	True	True	False		
o_ManualMode	Bool	false	False	True	True	True	False		
InOut									
▼ Static									
s_EdgeStart	Bool	false	False	True	True	True	False		
s_EdgeReset	Bool	false	False	True	True	True	False		

FB_SortingLogic_DB [DB3]

FB_SortingLogic_DB Properties

General	
---------	--

Name	FB_SortingLogic_DB	Number	3	Type	DB	Language	DB
Numbering	Automatic						

Information

Title		Author		Comment		Family	
Version	0.1	User-defined ID					

[illegible]

Totally Integrated Automation Portal		
PLC_Sorting [CPU 1214C DC/DC/DC] / Program blocks / System blocks Program resources This folder is empty.		

Totally Integrated Automation Portal		
PLC_Sorting [CPU 1214C DC/DC/DC] Technology objects This folder is empty.		

PLC tags

PLC tags									
	Name	Data type	Address	Retain	Access- ible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engi- neering	Supervision	Comment

PLC_Sorting [CPU 1214C DC/DC/DC] / PLC tags / Default tag table [29]

User constants

User constants				
	Name	Data type	Value	Comment

PLC tags

	Name	Data type	Address	Retain	Access- ible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engi- neering	Supervision				Comment
	I_atBack	Bool	%I2.1	False	True	True	True					
	I_atEntry	Bool	%I0.0	False	True	True	True					
	I_atFront	Bool	%I0.6	False	True	True	True					
	I_atLeftEntry	Bool	%I1.0	False	True	True	True					
	I_atLeftExit	Bool	%I1.2	False	True	True	True					
	I_atLoadPosition	Bool	%I0.4	False	True	True	True					
	I_atRightEntry	Bool	%I0.7	False	True	True	True					
	I_atRightExit	Bool	%I1.1	False	True	True	True					
	I_atTurntableEntry	Bool	%I0.3	False	True	True	True					
	I_atUnloadPosition	Bool	%I0.5	False	True	True	True					
	I_Auto	Bool	%I1.7	False	True	True	True					
	I_Manual	Bool	%I2.2	False	True	True	True					
	I_EmergencyStop	Bool	%I1.6	False	True	True	True					
	I_LowBox	Bool	%I0.1	False	True	True	True					
	I_Reset	Bool	%I1.4	False	True	True	True					
	I_Start	Bool	%I1.3	False	True	True	True					
	I_Stop	Bool	%I1.5	False	True	True	True					
	I_HighBox	Bool	%I0.2	False	True	True	True					

PLC_Sorting [CPU 1214C DC/DC/DC] / PLC tags / Factory_IO_Inputs [18]

User constants

User constants				
	Name	Data type	Value	Comment

PLC tags

PLC tags												
	Name	Data type	Address	Retain	Access- ible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engi- neering	Supervision				Comment
	Q_Counter	DInt	%QD30	False	True	True	True					
	Q_EntryConveyor	Bool	%Q0.1	False	True	True	True					
	Q_FeederConveyor	Bool	%Q0.0	False	True	True	True					
	Q_GreenIndicator	Bool	%Q0.7	False	True	True	True					
	Q_LeftConveyor	Bool	%Q0.5	False	True	True	True					
	Q_Load	Bool	%Q0.2	False	True	True	True					
	Q_RedIndicator	Bool	%Q1.1	False	True	True	True					
	Q_ResetLight	Bool	%Q1.3	False	True	True	True					
	Q_RightConveyor	Bool	%Q0.6	False	True	True	True					
	Q_StartLight	Bool	%Q1.2	False	True	True	True					
	Q_StopLight	Bool	%Q1.4	False	True	True	True					
	Q_Turn	Bool	%Q0.4	False	True	True	True					
	Q_Unload	Bool	%Q0.3	False	True	True	True					
	Q_YellowIndicator	Bool	%Q1.0	False	True	True	True					
	Q_RemoverLeft	Bool	%Q1.5	False	True	True	True					
	Q_RemoverRight	Bool	%Q1.6	False	True	True	True					
	Q_Emit	Bool	%Q1.7	False	True	True	True					

PLC_Sorting [CPU 1214C DC/DC/DC] / PLC tags / Factory_IO_Outputs [17]

User constants

User constants				
	Name	Data type	Value	Comment

PLC_Sorting [CPU 1214C DC/DC/DC] / PLC data types

UDT_ActuatorCmd

UDT_ActuatorCmd Properties							
General							
Name	UDT_ActuatorCmd	Number	1	Type	UDT	Language	
Numbering							
Information							
Title		Author		Comment		Family	
Version		User-defined ID					

Name	Data type	Default value	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion			Comment
EntryConveyor	Bool	false	True	True	True	False				
FeederConveyor	Bool	false	True	True	True	False				
LeftConveyor	Bool	false	True	True	True	False				
RightConveyor	Bool	false	True	True	True	False				
Load	Bool	false	True	True	True	False				
Unload	Bool	false	True	True	True	False				
Turn	Bool	false	True	True	True	False				
Emit	Bool	false	True	True	True	False				
RemoverLeft	Bool	true	True	True	True	False				
RemoverRight	Bool	true	True	True	True	False				

Totally Integrated Automation Portal		
PLC_Sorting [CPU 1214C DC/DC/DC] / PLC data types System data types This folder is empty.		

Totally Integrated Automation Portal		
--------------------------------------	--	--

PLC_Sorting [CPU 1214C DC/DC/DC] / Watch and force tables

Force table

Name	Address	Display format	Force value	Comment
------	---------	----------------	-------------	---------

--	--	--

Totally Integrated Automation Portal

PLC_Sorting [CPU 1214C DC/DC/DC] / Watch and force tables

WT_Mode

Name	Address	Display format	Modify value	Comment
"I_Start"	%I1.3	Bool		
"I_Stop"	%I1.5	Bool		
"I_EmergencyStop"	%I1.6	Bool		
"I_Reset"	%I1.4	Bool		
"I_Auto"	%I1.7	Bool		
"I_Manual"	%I2.2	Bool		
"DB_Machine".Run		Bool		
"DB_Machine".Fault		Bool		
"DB_Machine".StopPending		Bool		
"DB_Machine".AutoMode		Bool		
"DB_Machine".ManualMode		Bool		
"DB_Machine".CycleIdle		Bool		
"Q_YellowIndicator"	%Q1.0	Bool		
"Q_StartLight"	%Q1.2	Bool		
"Q_StopLight"	%Q1.4	Bool		
"Q_ResetLight"	%Q1.3	Bool		
"Q_GreenIndicator"	%Q0.7	Bool		
"Q_RedIndicator"	%Q1.1	Bool		

Totally Integrated Automation Portal		
PLC_Sorting [CPU 1214C DC/DC/DC] Traces Name		

Totally Integrated Automation Portal		
PLC_Sorting [CPU 1214C DC/DC/DC] / Traces Measurements This folder is empty.		

Totally Integrated Automation Portal		
PLC_Sorting [CPU 1214C DC/DC/DC] / Traces Combined measurements Name		

Totally Integrated Automation Portal		
PLC_Sorting [CPU 1214C DC/DC/DC] / OPC UA communication Server interfaces This folder is empty.		

Totally Integrated Automation Portal		
PLC_Sorting [CPU 1214C DC/DC/DC] PLC alarm text lists This folder is empty.		

Totally Integrated Automation Portal

PLC_Sorting [CPU 1214C DC/DC/DC] / Local modules

PLC_Sorting [CPU 1214C DC/DC/DC]

PLC_Sorting

General\Project information

Name	PLC_Sorting	Author	HoraEmbedded	Comment	
Slot	1	Rack	0		

General\Catalog information

Short designation	CPU 1214C DC/DC/DC	Description	Work memory 150 KB; 24VDC power supply with DI14 x 24VDC SINK/ SOURCE, DQ10 x 24VDC and AI2 on board; 6 high-speed counters and 4 pulse outputs on-board; signal board expands on-board I/O; up to 3 communication modules for serial communication; up to 8 signal modules for I/O expansion; PROFINET IO controller, I-device, transport protocol TCP/IP, secure Open User Communication, S7 communication, Web server, OPC UA: Server DA	Article number	6ES7 214-1AG40-0XB0
Firmware version	V4.6		False		

General\Identification & Maintenance

Plant designation		Location identifier		Installation date	2026-09-28 22:38:48.935
Additional information					

General\Checksums

Text lists	FA 70 E8 75 1D 5A 8E 29	Software	19 83 CA F7 F7 BA 96 45		
------------	-------------------------	----------	-------------------------	--	--

PROFINET interface [X1]\General

Name	PROFINET interface_1	Author	HoraEmbedded	Comment	
------	----------------------	--------	--------------	---------	--

PROFINET interface [X1]\General\Project information

Name	DI 14/DQ 10_1	Comment		Name	AI 2_1
Comment					

PROFINET interface [X1]\Ethernet addresses\Interface networked with

Subnet:	Not connected				
---------	---------------	--	--	--	--

PROFINET interface [X1]\Ethernet addresses\Internet protocol version 4 (IPv4)

IP configuration	Set IP address in the project	IP address:	192.168.0.1	Subnet mask:	255.255.255.0
Use router	False				

PROFINET interface [X1]\Ethernet addresses\PROFINET

PROFINET device name is set directly at the device	False	Generate PROFINET device name automatically	True	PROFINET device name:	plc_sorting
Converted name:	plcxbsorting9923	Device number:	0		

PROFINET interface [X1]\Time synchronization

Enable time synchronization via NTP server	Enable time synchronization via NTP server		IP addresses	Server 1	0.0.0.0
Server 2	0.0.0.0	Server 3	0.0.0.0	Server 4	0.0.0.0
Update interval	10sec			CPU synchronizes the modules of the device.	No synchronization

PROFINET interface [X1]\Digital inputs\Channel0

Channel address	I100.0	Input filters	6.4 millisec	Enable pulse catch	0
-----------------	--------	---------------	--------------	--------------------	---

PROFINET interface [X1]\Digital inputs\Channel0\

Enable rising edge detection	0	Prefix Event Rising Edge	49152	Event name:	0
Hardware interrupt:	0	Rising edge0	Rising edge0		

PROFINET interface [X1]\Digital inputs\Channel0\

Enable falling edge detection	0	Prefix Event Falling Edge	49280	Event name:	0
Hardware interrupt:	0	Falling edge0	Falling edge0		

PROFINET interface [X1]\Digital inputs\Channel1

Channel address	I100.1	Input filters	6.4 millisec	Enable pulse catch	0
-----------------	--------	---------------	--------------	--------------------	---

PROFINET interface [X1]\Digital inputs\Channel1\

Enable rising edge detection	0	Prefix Event Rising Edge	49153	Event name:	0
Hardware interrupt:	0	Rising edge1	Rising edge1		

PROFINET interface [X1]\Digital inputs\Channel1\

Enable falling edge detection	0	Prefix Event Falling Edge	49281	Event name:	0
Hardware interrupt:	0	Falling edge1	Falling edge1		

PROFINET interface [X1]\Digital inputs\Channel2

Channel address	I100.2	Input filters	6.4 millisec	Enable pulse catch	0
-----------------	--------	---------------	--------------	--------------------	---

PROFINET interface [X1]\Digital inputs\Channel2\

Enable rising edge detection	0	Prefix Event Rising Edge	49154	Event name:	0
Hardware interrupt:	0	Rising edge2	Rising edge2		

PROFINET interface [X1]\Digital inputs\Channel2\

Enable falling edge detection	0	Prefix Event Falling Edge	49282	Event name:	0
Hardware interrupt:	0	Falling edge2	Falling edge2		

PROFINET interface [X1]\Digital inputs\Channel3

Channel address	I100.3	Input filters	6.4 millisec	Enable pulse catch	0
-----------------	--------	---------------	--------------	--------------------	---

PROFINET interface [X1]\Digital inputs\Channel3\

Enable rising edge detection	0	Prefix Event Rising Edge	49155	Event name:	0
Hardware interrupt:	0	Rising edge3	Rising edge3		

Totally Integrated Automation Portal						
PROFINET interface [X1]\Digital inputs\Channel3\						
Enable falling edge detection	0	Prefix Event Falling Edge	49283	Event name:	0	
Hardware interrupt:	0	Falling edge3	Falling edge3			
PROFINET interface [X1]\Digital inputs\Channel4						
Channel address	I100.4	Input filters	6.4 millisec	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel4\						
Enable rising edge detection	0	Prefix Event Rising Edge	49156	Event name:	0	
Hardware interrupt:	0	Rising edge4	Rising edge4			
PROFINET interface [X1]\Digital inputs\Channel4\						
Enable falling edge detection	0	Prefix Event Falling Edge	49284	Event name:	0	
Hardware interrupt:	0	Falling edge4	Falling edge4			
PROFINET interface [X1]\Digital inputs\Channel5						
Channel address	I100.5	Input filters	6.4 millisec	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel5\						
Enable rising edge detection	0	Prefix Event Rising Edge	49157	Event name:	0	
Hardware interrupt:	0	Rising edge5	Rising edge5			
PROFINET interface [X1]\Digital inputs\Channel5\						
Enable falling edge detection	0	Prefix Event Falling Edge	49285	Event name:	0	
Hardware interrupt:	0	Falling edge5	Falling edge5			
PROFINET interface [X1]\Digital inputs\Channel6						
Channel address	I100.6	Input filters	6.4 millisec	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel6\						
Enable rising edge detection	0	Prefix Event Rising Edge	49158	Event name:	0	
Hardware interrupt:	0	Rising edge6	Rising edge6			
PROFINET interface [X1]\Digital inputs\Channel6\						
Enable falling edge detection	0	Prefix Event Falling Edge	49286	Event name:	0	
Hardware interrupt:	0	Falling edge6	Falling edge6			
PROFINET interface [X1]\Digital inputs\Channel7						
Channel address	I100.7	Input filters	6.4 millisec	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel7\						
Enable rising edge detection	0	Prefix Event Rising Edge	49159	Event name:	0	
Hardware interrupt:	0	Rising edge7	Rising edge7			
PROFINET interface [X1]\Digital inputs\Channel7\						
Enable falling edge detection	0	Prefix Event Falling Edge	49287	Event name:	0	
Hardware interrupt:	0	Falling edge7	Falling edge7			
PROFINET interface [X1]\Digital inputs\Channel8						
Channel address	I101.0	Input filters	6.4 millisec	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel8\						
Enable rising edge detection	0	Prefix Event Rising Edge	49160	Event name:	0	
Hardware interrupt:	0	Rising edge8	Rising edge8			
PROFINET interface [X1]\Digital inputs\Channel8\						
Enable falling edge detection	0	Prefix Event Falling Edge	49288	Event name:	0	
Hardware interrupt:	0	Falling edge8	Falling edge8			
PROFINET interface [X1]\Digital inputs\Channel9						
Channel address	I101.1	Input filters	6.4 millisec	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel9\						
Enable rising edge detection	0	Prefix Event Rising Edge	49161	Event name:	0	
Hardware interrupt:	0	Rising edge9	Rising edge9			
PROFINET interface [X1]\Digital inputs\Channel9\						
Enable falling edge detection	0	Prefix Event Falling Edge	49289	Event name:	0	
Hardware interrupt:	0	Falling edge9	Falling edge9			
PROFINET interface [X1]\Digital inputs\Channel10						
Channel address	I101.2	Input filters	6.4 millisec	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel10\						
Enable rising edge detection	0	Prefix Event Rising Edge	49162	Event name:	0	
Hardware interrupt:	0	Rising edge10	Rising edge10			
PROFINET interface [X1]\Digital inputs\Channel10\						
Enable falling edge detection	0	Prefix Event Falling Edge	49290	Event name:	0	
Hardware interrupt:	0	Falling edge10	Falling edge10			
PROFINET interface [X1]\Digital inputs\Channel11						
Channel address	I101.3	Input filters	6.4 millisec	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel11\						
Enable rising edge detection	0	Prefix Event Rising Edge	49163	Event name:	0	
Hardware interrupt:	0	Rising edge11	Rising edge11			
PROFINET interface [X1]\Digital inputs\Channel11\						
Enable falling edge detection	0	Prefix Event Falling Edge	49291	Event name:	0	
Hardware interrupt:	0	Falling edge11	Falling edge11			
PROFINET interface [X1]\Digital inputs\Channel12						
Channel address	I101.4	Input filters	6.4 millisec	Enable pulse catch	0	
PROFINET interface [X1]\Digital inputs\Channel13						
Channel address	I101.5	Input filters	6.4 millisec	Enable pulse catch	0	

Totally Integrated Automation Portal						
PROFINET interface [X1]\Analog inputs\Noise reduction						
Integration time	50 Hz (20 ms)					
PROFINET interface [X1]\Analog inputs\Channel0						
Channel address	IW64	Measurement type	Voltage	Voltage range	0..10 V	
Smoothing	Weak (4 cycles)			Enable overflow diagnostics	1	
PROFINET interface [X1]\Analog inputs\Channel1						
Channel address	IW66	Measurement type	Voltage	Voltage range	0..10 V	
Smoothing	Weak (4 cycles)			Enable overflow diagnostics	1	
PROFINET interface [X1]\Digital outputs						
Reaction to CPU STOP	Use substitute value					
PROFINET interface [X1]\Digital outputs\Channel0						
Channel address	Q0.0	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel1						
Channel address	Q0.1	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel2						
Channel address	Q0.2	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel3						
Channel address	Q0.3	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel4						
Channel address	Q0.4	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel5						
Channel address	Q0.5	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel6						
Channel address	Q0.6	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel7						
Channel address	Q0.7	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel8						
Channel address	Q1.0	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Digital outputs\Channel9						
Channel address	Q1.1	Substitute a value of 1 on a change from RUN to STOP.	0			
PROFINET interface [X1]\Operating mode						
IO controller	True	IO system		Device number	0	
IO device	False					
PROFINET interface [X1]\I/O addresses\Input addresses						
Start address	100.0	End address	101.7	Organization block	0	
Process image	0					
PROFINET interface [X1]\I/O addresses\Input addresses						
Start address	64	End address	67	Organization block	0	
Process image	0					
PROFINET interface [X1]\I/O addresses\Output addresses						
Start address	0.0	End address	1.7	Organization block	0	
Process image	0					
PROFINET interface [X1]\Advanced options\Interface options						
Support device replacement without exchangeable medium	True	Permit overwriting of device names of all assigned IO devices	False	Use IEC V2.2 LLDP mode	False	
Keep-Alive connection monitoring:	30s					
PROFINET interface [X1]\Advanced options\Real time settings\IO communication						
Send clock:	1.000ms					
PROFINET interface [X1]\Advanced options\Real time settings\Real time options						
Calculated bandwidth for cyclic IO data:	0.000ms	Calculated bandwidth for cyclic IO data:	0.000%			
PROFINET interface [X1]\Advanced options\Port [X1 P1]\General						
Name	Port_1	Author	ENVY	Comment		
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port interconnection\Local port:						
Local port:	PLC_Sorting\PROFINET interface_1 [X1]\Port_1 [X1 P1]	Medium:	Copper	Cable name:	---	
						

Totally Integrated Automation Portal						
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port interconnection\Partner port:						
	Monitoring of partner port is not possible	Partner port:	Any partner			
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port options\Activate						
Activate this port for use	True					
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port options\Connection						
Transmission rate / duplex:	Automatic	Monitor	False	Enable autonegotiation	True	
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port options\Boundaries						
End of detection of accessible devices	False	End of topology discovery	False	End of the sync domain	False	
PROFINET interface [X1]\Web server access						
Enable Web server for the IP address of this interface	False	The Web server must also be activated in the properties of the PLC.				
High speed counters (HSC)\HSC1\General\Enable						
Enable this high speed counter	0	Enable this high speed counter	0	Enable this high speed counter	0	
Enable this high speed counter	0	Enable this high speed counter	0	Enable this high speed counter	0	
High speed counters (HSC)\HSC1\General\Project information						
Name	HSC_1	Comment		Name	HSC_2	
Comment		Name	HSC_3	Comment		
Name	HSC_4	Comment		Name	HSC_5	
Comment		Name	HSC_6	Comment		
High speed counters (HSC)\HSC1\I/O addresses\Input addresses						
Start address	1000.0	End address	1003.7	Start address	1004.0	
End address	1007.7	Organization block	0	Start address	1008.0	
End address	1011.7	Organization block	0	Process image	0	
Start address	1012.0	End address	1015.7	Organization block	0	
Process image	0	Start address	1016.0	End address	1019.7	
Organization block	0	Process image	0	Start address	1020.0	
End address	1023.7	Organization block	0	Process image	0	
Organization block	0	Process image	0	Process image	0	
Pulse generators (PTO/PWM)\PTO1/PWM1\General\Enable						
Enable this pulse generator	0	Enable this pulse generator	0			
Pulse generators (PTO/PWM)\PTO1/PWM1\General\Project information						
Name	Pulse_1	Comment		Name	Pulse_2	
Comment						
Pulse generators (PTO/PWM)\PTO1/PWM1\I/O addresses\Output addresses						
Start address	1000.0	End address	1001.7	Start address	1002.0	
End address	1003.7	Organization block	0	Organization block	0	
Process image	0	Process image	0			
Startup						
Startup after POWER ON	Warm restart - mode before POWER OFF	Comparison preset to actual configuration	Startup CPU even if mismatch	Configuration time	60000ms	
OBs should be interruptible	1					
Cycle						
Cycle monitoring time [ms]	150ms			Enable minimum cycle time for cyclic OBs	0	
Minimum cycle time	1ms					
Communication load						
Cycle load due to communication [%]	20%					
System and clock memory\System memory bits						
Enable the use of system memory byte	0	Address of system memory byte (MBx)	1	First cycle		
Diagnostic status changed		Always 1 (high)		Always 0 (low)		
System and clock memory\Clock memory bits						
Enable the use of clock memory byte	0	Address of clock memory byte (MBx)	0	10 Hz clock		
5 Hz clock		2.5 Hz clock		2 Hz clock		
1.25 Hz clock		1 Hz clock		0.625 Hz clock		
0.5 Hz clock						
Web server\General						
Activate Web server on all modules of this device	False	Permit access only with HTTPS	True			
Web server\Automatic update						
Enable automatic update	True	Update interval	0s			
Web server\User management						
User name			User rights			
Everybody						
Web server\User-defined web pages						
Application name	HTML source path	Default HTML page	Files with dynamic content	Web DB number	Fragment DB number	
		index.htm	.htm;.html	333	334	
Web server\Overview of interfaces						
Device		Interface		Enabled web server access		
PLC_Sorting		PROFINET interface_1		False		

Totally Integrated Automation Portal

User interface languages

Assign project language

English (United States)

English (United States)

English (United States)

English (United States)

English (United States)

English (United States)

English (United States)

User interface languages

German

English

French

Spanish

Italian

Chinese (simplified)

Time of day\Local time

Time zone

(UTC +01:00) Berlin, Bern, Brussels, Rome, Stockholm, Vienna

Time of day\Daylight saving time

Activate daylight saving time

1

Difference between standard and daylight saving time

60min

Time of day\Daylight saving time\Start of daylight saving time

Starting week of the month:

Last

Sunday

in

March

at

1:00 a.m.

Time of day\Daylight saving time\Start of standard time

Last

Sunday

in

October

at

2:00 a.m.

Protection & Security

Level of protection

No protection

Protection & Security\Connection mechanisms

Permit access with PUT/GET communication from remote partner

True

Protection & Security\Security event

Summarize diagnostics in case of high message volume

True

Length of an interval

20

Unit

seconds

Protection & Security\External load memory

Disable copying from internal load memory to external load memory

False

Advanced configuration\DnsParameterConfigurationMenu

The Tree-Node DnsConfigurationMenu was not filled by some ACF

Advanced configuration\Configuration control\Configuration control for central configuration

Allow to reconfigure the device via the user program

0

Advanced configuration\SNMP\SNMP configuration (Simple Network Management Protocol).

Activate SNMP

False

Configuration control\Configuration control for central configuration

Allow to reconfigure the device via the user program

0

Connection resources\

	Station resources - Reserved - Maximum	Station resources - Reserved - Configured	Station resources - Dynamic - Configured	Module resources - PLC_Sorting [CPU 1214C DC/DC/DC] - Configured
Maximum number of resources:		34	34	68
	Maximum	Configured	Configured	Configured
PG communication:	4	-	-	-
HMI communication:	12	0	0	0
S7 communication:	8	0	0	0
Open user communication:	8	0	0	0
Web communication:	2	-	-	-
OPC UA client/server communication:	0	-	-	-
Other communication:	-	-	0	0
Total resources used:		0	0	0
Available resources:		34	34	68

Overview of addresses\Overview of addresses\Overview of addresses

Inputs

True

Outputs

True

Address gaps

False

Slot

True

Totally Integrated Automation Portal											
Type	Addr. from	Addr. to	Module	PIP	Device name	Device number	Size	Master / IO system	Rack	Slot	
I	64	67	AI 2_1	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 2	
I	1000	1003	HSC_1	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 16	
I	1004	1007	HSC_2	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 17	
I	1008	1011	HSC_3	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 18	
I	1012	1015	HSC_4	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 19	
I	1016	1019	HSC_5	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 20	
I	1020	1023	HSC_6	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	4 Bytes	-	0	1 21	
O	1000	1001	Pulse_1	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 32	
O	1002	1003	Pulse_2	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 33	
O	1004	1005	Pulse_3	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 34	
O	1006	1007	Pulse_4	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 35	
I	100	101	DI 14/DQ 10_1	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 1	
O	0	1	DI 14/DQ 10_1	Automatic update	PLC_Sorting [CPU 1214C DC/DC/DC]	-	2 Bytes	-	0	1 1	