
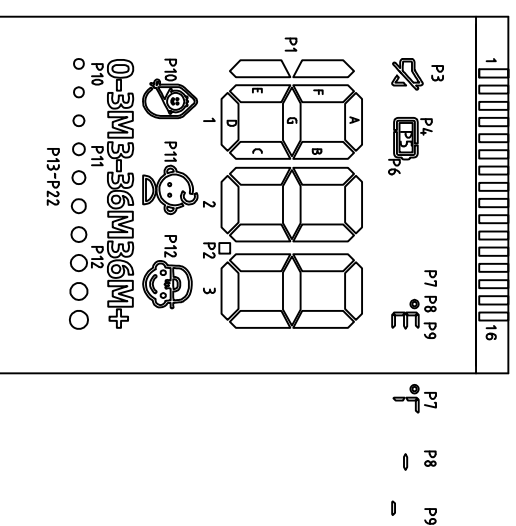
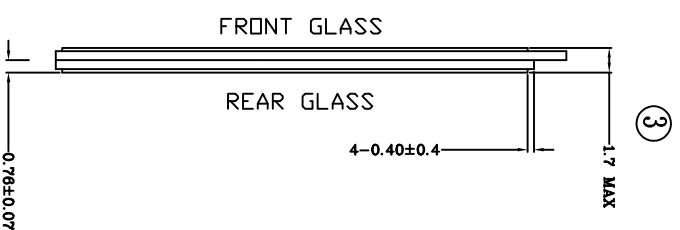


and on

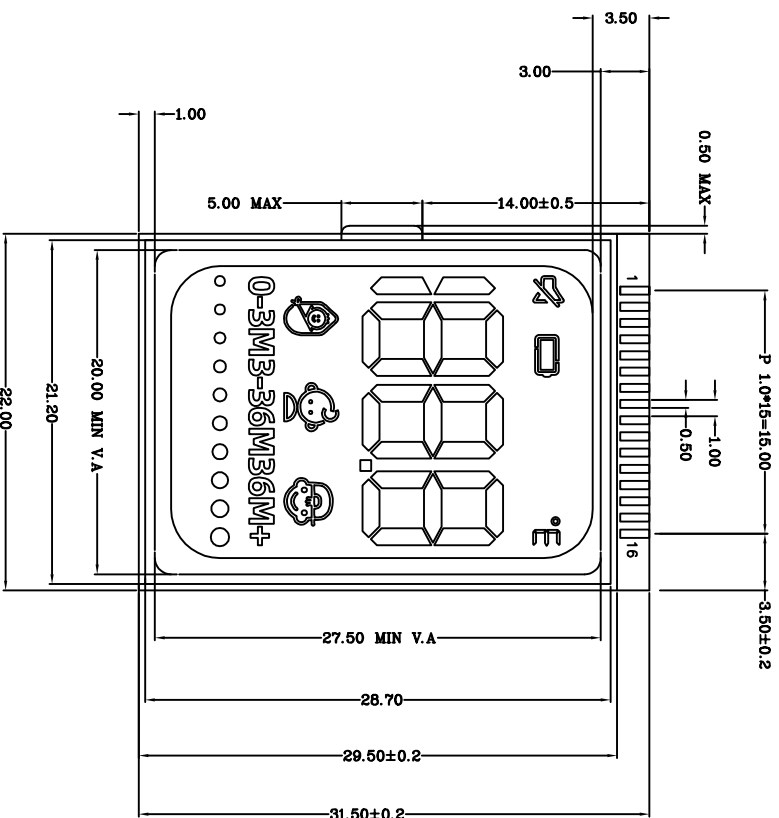

分段代码图

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
					S0	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11
COM0				COM0	P1	1A	P2	2A	P3	3A	P4	P8	P12	P16	P20	-
COM1			COM1		1F	1B	2F	2B	3F	3B	P5	P9	P13	P17	P21	-
COM2		COM2			1G	1C	2G	2C	3G	3C	P6	P10	P14	P18	P22	-
COM3	COM3				1E	1D	2E	2D	3E	3D	P7	P11	P15	P19	-	-

技术要求:

1. 带编号为重要尺寸, 需要 IQC 测量;
2. 产品符合 rohs

DISPLAY TYPE	TN
FRONT POLARIZER	POSITIVE
OPERATING METHOD	TRANSMISSIVE
	NORMAL
OPERATING VOLTAGE(VDP)	1/4 DUTY
VIEWING ANGLE	1/3 BIAS
OPERATION TEMPERATURE	30V
STORAGE TEMPERATURE	0°C
HIGH TEMP./HUMIDITY STORAGE	0°C TO 55°C
CONNECTOR TYPE	-20°C TO 65°C
LCD CONTROLLER/DRIVER	ZEBRA
BACKLIGHT COLOR	/

3				Signature	Date	Tolerance		Pro material	IT0	Model NO.	T-Z1	
2			Design			.X		Surf dispose		Part name	液晶	
1	初版制作	2021.07.15	Checkup			.XX		Scale	2:1	Drawing NO.	T-Z1-L01	
No.	更改记录	更改时间	Approve			.X°		Units	mm	 	Edition	V1.0