
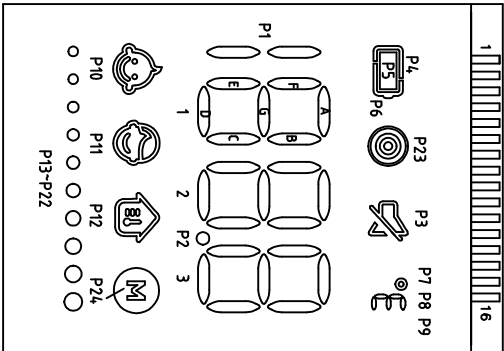
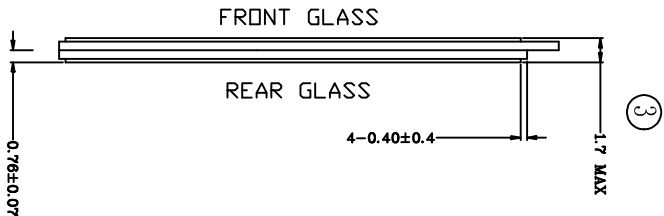


andon

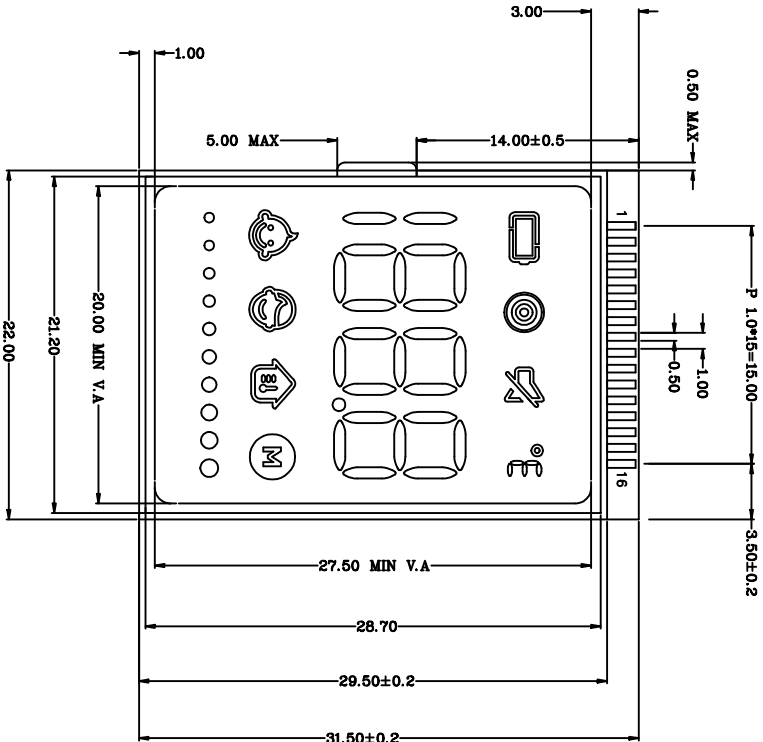

分段代码图

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
					S0	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11
COM0				COM0	P1	1A	P2	2A	P3	3A	P4	P8	P12	P16	P20	P24
COM1			COM1		1F	1B	2F	2B	3F	3B	P5	P9	P13	P17	P21	-
COM2			COM2		1G	1C	2G	2C	3G	3C	P6	P10	P14	P18	P22	-
COM3			COM3		1E	1D	2E	2D	3E	3D	P7	P11	P15	P19	P23	-

DISPLAY TYPE		TN
FRONT POLARIZER		POSITIVE
OPERATING METHOD		NORMAL
OPERATION VOLTAGE(VDP)		1/4 DUTY
VIEWING ANGLE		1/3 BIAS
OPERATION TEMPERATURE		600
STORAGE TEMPERATURE		0°C TO 55°C
HIGH TEMP/HUMIDITY STORAGE		-20°C TO 65°C
CONNECTOR TYPE		ZEBRA
LCD CONTROLLER/DRIVER		/
BACKLIGHT COLOR		/

技术要求:

- 带编号为重要尺寸,需要IQC测量;
- 产品符合rohs 2.0

3			Signature	Date	Tolerance	Pro material	ITO	Model NO.	PT9L
2			Design		.X	Surf dispose		Part name	液晶
1			Checkup		.XX	Scale	2:1	Drawing NO.	PT9L-L01
No.	更改记录	更改时间	Approve		.X°	Units	mm	Edition	V1.0