


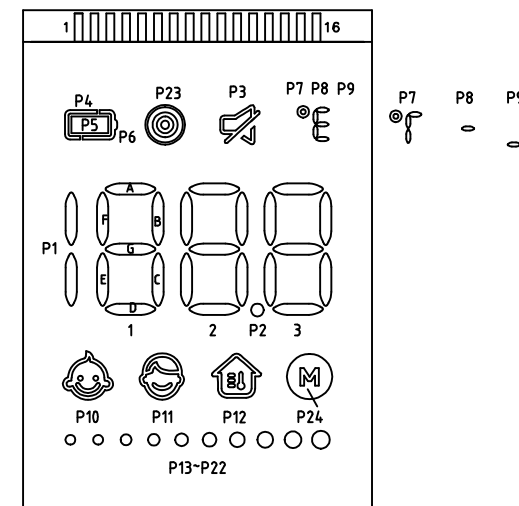

分段代码图

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
					S0	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11
COM0				COM0	P1	1A	P2	2A	P3	3A	P4	P8	P12	P16	P20	P24
COM1			COM1		1F	1B	2F	2B	3F	3B	P5	P9	P13	P17	P21	–
COM2		COM2			1G	1C	2G	2C	3G	3C	P6	P10	P14	P18	P22	–
COM3	COM3				1E	1D	2E	2D	3E	3D	P7	P11	P15	P19	P23	–

DISPLAY TYPE	TN POSITIVE TRANSMISSIVE
FRONT POLARIZER	NORMAL
OPERATING METHOD	1/4 DUTY 1/3 BIAS
OPERATION VOLTAGE(V _{OP})	3.0V
VIEWING ANGLE	6:00
OPERATION TEMPERATURE	0°C TO 55°C
STORAGE TEMPERATURE	-20°C TO 65°C
HIGH TEMP./HUMIDITY STORAGE	/
CONNECTOR TYPE	ZEBCRA
LCD CONTROLLER/DRIVER	/
BACKLIGHT COLOR	/

1. 带编号为重要尺寸, 需要IQC测量;
2. 产品符合rohs 2.0

3				Signature	Date	Tolerance	Pro material	IT0	Model NO.	PT9L	
2			Design			.X	Surf dispose		Part name	液晶	
1			Checkup			.XX	Scale	2:1	Drawing NO.	PT9L-L01	
No.	更 改 记 录	更改时间	Approve			.X°	Units	mm		Edition	V1.0