

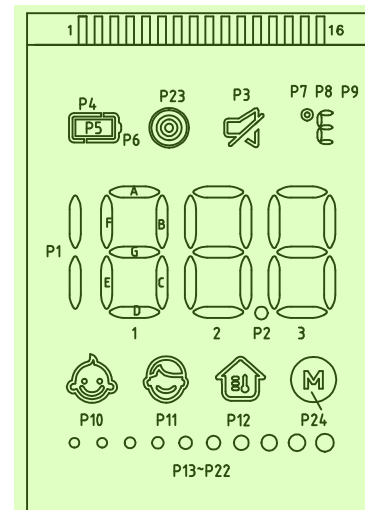
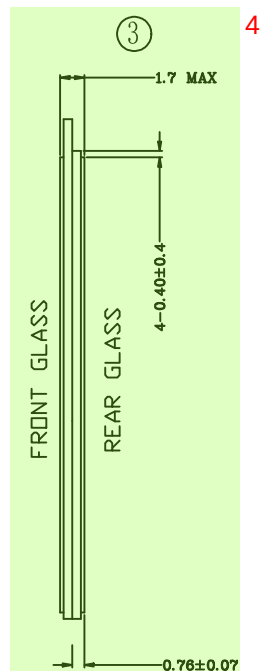


andon²

⊗ 尺寸序号 1

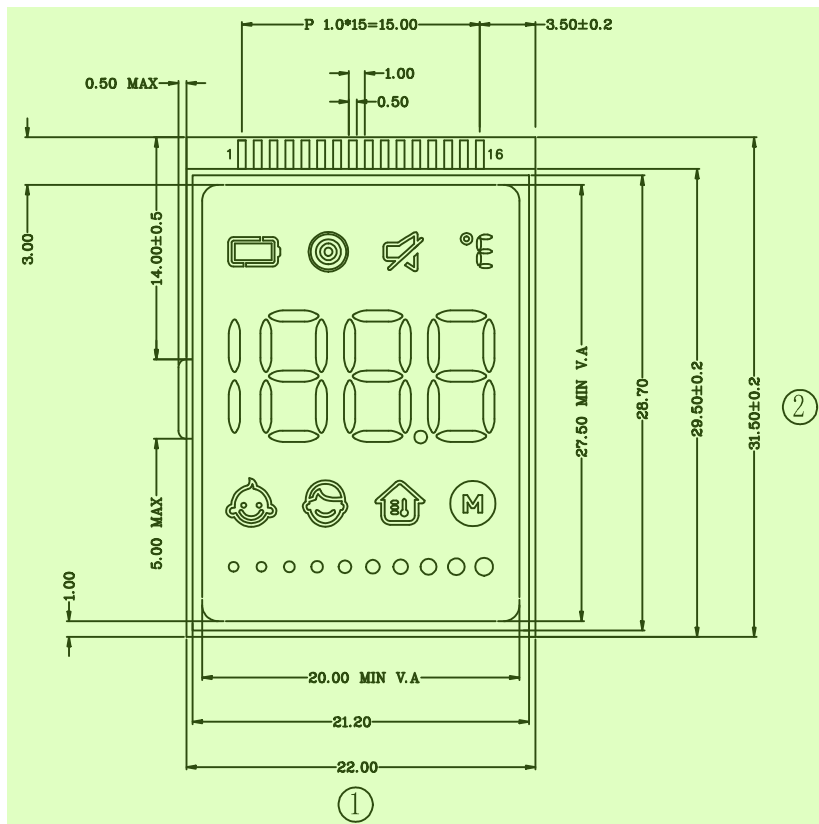

分段代码图 7

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
					S0	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11
COM0				COM0	P1	1A	P2	2A	P3	3A	P4	P8	P12	P16	P20	P24
COM1			COM1		1F	1B	2F	2B	3F	3B	P5	P9	P13	P17	P21	-
COM2		COM2			1G	1C	2G	2C	3G	3C	P6	P10	P14	P18	P22	-
COM3	COM3				1E	1D	2E	2D	3E	3D	P7	P11	P15	P19	P23	-

8

技术要求:⁹

- 带编号为重要尺寸, 需要IQC测量;¹⁰
- 产品符合rohs 2.0

DISPLAY TYPE	TN
FRONT POLARIZER	POSITIVE
OPERATING METHOD	TRANSMISSIVE
OPERATION VOLTAGE(VDP)	NORMAL
VIEWING ANGLE	1/4 DUTY
OPERATION TEMPERATURE	1/3 BIAS
STORAGE TEMPERATURE	3.0V
HIGH TEMP/HUMIDITY STRDAGE	6:00
CONNECTOR TYPE	0°C TO 55°C
LCD CONTROLLER/DRIVER	-20°C TO 65°C
BACKLIGHT COLOR	/
	/
	ZEBRA
	/
	/

12

3				Signature	Date	Tolerance	Pro material	ITO	Model NO.	PT9L
2			Design			.X	Surf dispose		Part name	液晶
1			Checkup			.XX	Scale	2:1	Drawing NO.	PT9L-L01
No.	更改记录	更改时间	Approve			.X°	Units	mm	⊕	Edition V1.0