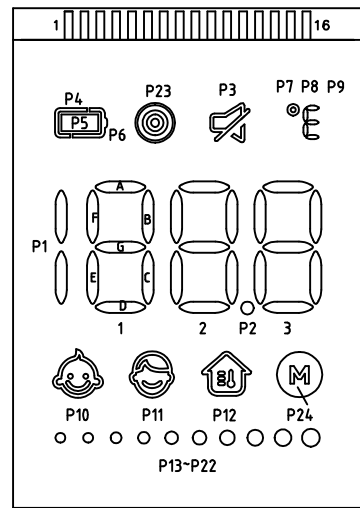
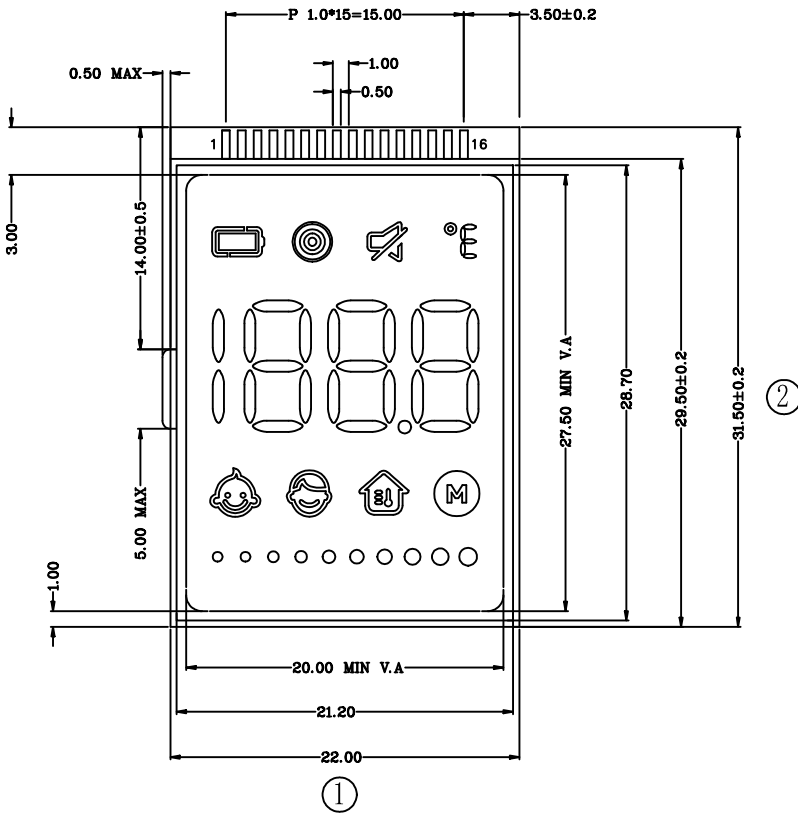


分段代码图

技术要求:
1. 带编号为重要尺寸, 需要IQC测量;
2. 产品符合rohs 2.0

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
COM0				COM0	S0	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11
COM1			COM1		1F	1B	2F	2B	3F	3B	P4	P8	P12	P16	P20	P24
COM2		COM2			1G	1C	2G	2C	3G	3C	P6	P10	P14	P18	P22	-
COM3	COM3				1E	1D	2E	2D	3E	3D	P7	P11	P15	P19	P23	-

DISPLAY TYPE	TN
FRONT POLARIZER	POSITIVE
OPERATING METHOD	TRANSMISSIVE
OPERATION VOLTAGE(VDP)	NORMAL
VIEWING ANGLE	1/4 DUTY
OPERATION TEMPERATURE	1/3 BIAS
STORAGE TEMPERATURE	3.0V
HIGH TEMP/HUMIDITY STRDAGE	6:00
CONNECTOR TYPE	0°C TO 55°C
LCD CONTROLLER/DRIVER	-20°C TO 65°C
BACKLIGHT COLOR	/
	/
	ZEBRA
	/
	/

3				Signature	Date	Tolerance	Pro material	ITO	Model NO.	PT9L
2			Design			.X	Surf dispose		Part name	液晶
1			Checkup			.XX	Scale	2:1	Drawing NO.	PT9L-L01
No.	更改记录	更改时间	Approve			.X°	Units	mm	⊕	Edition V1.0