
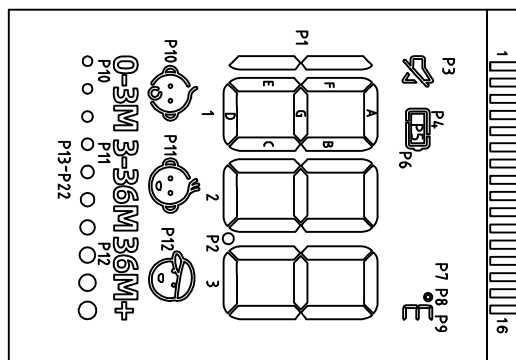
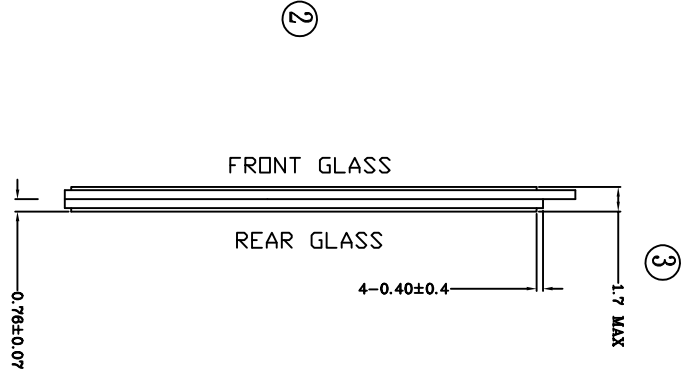


andon

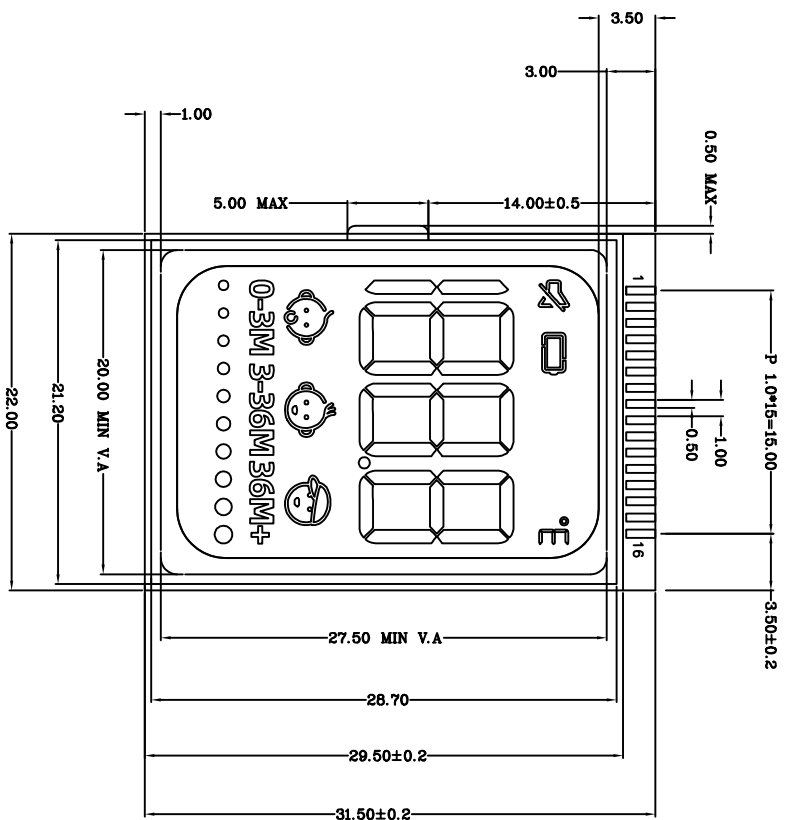

分段代码图

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
COM0					S0	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11
COM1			COM1	COM0	P1	1A	P2	2A	P3	3A	P4	P8	P12	P16	P20	-
COM2					1F	1B	2E	2B	3F	3B	P5	P9	P13	P17	P21	-
COM3	COM3				1G	1C	2G	2C	3G	3C	P6	P10	P14	P18	P22	-

技术要求:
1. 带编号为重要尺寸, 需要IQC测量;
2. 产品符合rohs 2.0

3			Signature	Date	Tolerance	Pro material	ITO	Model NO.	
2			Design		.X	Surf dispose		Part name	液晶
1	初版制作		Checkup		.XX	Scale	2:1	Drawing NO.	
No.	更改记录	更改时间	Approve		.X°	Units	mm	Edition	V1.0

DISPLAY TYPE	TN
FRONT POLARIZER	POSITIVE
FRONT POLARIZER	TRANSMISSIVE
OPERATING METHOD	1/4 DUTY
OPERATING METHOD	1/3 BIAS
OPERATION VOLTAGE(VDP)	3.0V
VIEWING ANGLE	600
OPERATION TEMPERATURE	0°C TO 55°C
STORAGE TEMPERATURE	-20°C TO 65°C
HIGH TEMP/HUMIDITY STORAGE	/
CONNECTOR TYPE	ZEBRA
LCD CONTROLLER/DRIVER	/
BACKLIGHT COLOR	/