



LOTFY GROUP

CATALOGUE



**Protection
with Satisfaction**



LOTFY GROUP



SD103, SD 103T
(Registered No.:R18040)



DSF680 -4.3.2
(Registered No.:R18040)



SD103, SD 104A
(Registered No.:R18040)



SD105A, SD105, SD106, SD106A
(Registered No.:106602)



DS70-DS130
(Registered No.:106604)



DSF680 -4.3.2
(Registered No.:106605)



SD101, SD 101T
(Registered No.:6H64256)



SD102, SD 102T
(Registered No.:00C213)



SD103, SD 104A
(Registered No.:9C7139)



SD104-DS107
(Registered No.:23722)



DS70-DS130
(Registered No.:02C095)



DSF680- 4.3.2
(Registered No.:03C050)



SD101, BS 165
(Registered No.:4237)



ISO 9001
(Registered No.:R18040)



SD101, BS165
(Registered No.:4237)



ISO 9001
(Registered No.:KQC-0316)

Certificates and Test reports

Marking	Organization	Registered No.	Standards	Classification	Rating/hr	Remarks
	Underwriter Laboratories	R 18040	UL 72	SD103,103T	1 hr	
		R 18040	UL 72	DS23~DS50	1 hr	
		R 18040	UL 72	DSF680 - 4.3.2	1 hr	
		BP9397	UL 687	BA710~BA1500	TL - 15	
		BP9497	UL 1037	BA780~BA1570	RSC- 5	
	Japan Industrial Standards	6H64256	JIS S 1037	101,101T	1 hr	
		00C213	JIS S 1037	102,102T	1 hr	
		9C7139	JIS S 1037	103,104A	1 hr	
		23722	JIS S 1037	104~109	2 hr	
		02C091	JIS S 1037	DS23~DS50	1 hr	
		02C095	JIS S 1037	DS70~DS130	2 hr	
		02C435	JIS S 1037	DS157~DS182	1 hr	
		03C050	JIS S 1037	DSF680 -4.3.2	1 hr	
		02C436	JIS S 1037	NS897 -NS1297	1 hr	
		05C046	JIS S 1037	130TD	1 hr	
	The Japanes Safe & Furniture Association	04C231		DS70~DS130	TS - 15	
		05C296		DS133~DS170	TS - 15	
		05C063		DS157~DS182	TS - 15	
	Swedish National Testing and Research Institute	106601	SPCR 002	SD103,104A	NT FIRE 017-60	
		106602	SPCR 002	SD105,105A, 106,106A	NT FIRE 017-90	
		106603	SPCR 002	DS23~DS50	NT FIRE 017-60	
		106604	SPCR 002	DS70~DS130	NT FIRE 017-120	
		106605	SPCR 002	DSF680 -4.3.2	NT FIRE 017-60	
	International Standardization of Organization	KQC- 0316	ISO 9001	Quality Management System		
	KS Korean Standard Association	4237	KSG 4500	SD101~BS165 DS23~DS50	P-S-ITS	
		2002-114	KSG 4500	DS23~DS50 DS70~DS170	1hr 2hr	

Fire Proof safe



Passed 1hr fire rating

passed 1Hrs UL Fire rating /Certi No.R18040

passed NT Fire 017-120, SP Fire rating / Certi No.106601

passed 1Hrs JIS Fire rating / certi No.0DC2139C7139

Passed 1Hrs KS Fire rating



SD- 101K



■ Outside : H307 x W412 x D362mm
■ In - side : H230 x W335 x D224mm
■ Outside : H12 x W16 ½ x D13½inch



SD- 101TK



■ Outside : H412 x W307 x D362mm
■ In - side : H335 x W230 x D224mm
■ Outside : H16½ x W12 x D13½ inch
■ In-Side : H9 x W13½ x D8½ inch
■ Approx Wt : 30Kg, 66Lbs
■ Fittings : 1 Plastic Tray



SD- 102K



■ Outside : H333 x W433 x D400mm
■ In - side : H237 x W337 x D242mm
■ Outside : H13½ x W17 x D15½inch



SD- 102TK



■ Outside : H433 x W333 x D400mm
■ In - side : H337 x W237 x D257mm
■ Outside : H17 x W13½ x D5½inch
■ In-Side : H13½ x W9½ x D10½ inch
■ Approx Wt : 37Kg, 82Lbs
■ Fittings : 1 Plastic Tray



SD- 103K



■ Outside : H346 x W486 x D420mm
■ In - side : H226 x W366 x D260mm
■ Outside : H13 x W19 x D16inch
■ In-Side : H8 x W14 x D10 inch
■ Approx Wt : 51Kg, 112Lbs
■ Fittings : 1 Plastic Tray



SD- 103TK



■ Outside : H486 x W346 x D420mm
■ In - side : H366 x W226 x D260mm
■ Outside : H19 x W19 x D16inch
■ In-Side : H14 x W8 x D10 inch
■ Approx Wt : 51Kg, 112Lbs
■ Fittings : 1 Plastic Tray

Hinge(W) 28mm is included except dial hieght

Features

- ▶ Select your favorite safe in accordance with your necessity.
- ▶ Recommendable for home and small business.
- ▶ Keepable documents and paper records.
- ▶ To have a safeguard fire proof safes in your place is to guarantee your safe life.

Lock option : EDL, Combination dial lock.



ESD- 101



■ Outside : H307 x W412 x D362mm
■ In - side : H230 x W335 x D224mm
■ Outside : H12 x W16 x D14inch
■ In-Side : H9 x W13 x D8 inch
■ Approx Wt : 30Kg, 66Lbs
■ Fittings : 1 Plastic Tray



ESD- 101T



■ Outside : H412 x W307 x D362mm
■ In - side : H335 x W230 x D224mm
■ Outside : H16 x W12 x D14inch
■ In-Side : W13 x W9 x D8 inch
■ Approx Wt : 30Kg, 66Lbs
■ Fittings : 1 Plastic Tray



ESD- 102



■ Outside : H333 x W433 x D400mm
■ In - side : H237 x W337 x D242mm
■ Outside : H13 x W17 x D15inch
■ In-Side : H9 x W13 x D9 inch
■ Approx Wt : 37Kg, 82Lbs
■ Fittings : 1 Plastic Tray



ESD- 102T



■ Outside : H433 x W333 x D400mm
■ In - side : H337 x W237 x D257mm
■ Outside : H17 x W13 x D15inch
■ In-Side : H13 x W9 x D10 inch
■ Approx Wt : 37Kg, 82Lbs
■ Fittings : 1 Plastic Tray



ESD- 103



■ Outside : H346 x W486 x D420mm
■ In - side : H226 x W366 x D260mm
■ Outside : H13 x W19 x D16inch
■ In-Side : H8 x W14 x D10inch
■ Approx Wt : 51Kg, 112Lbs
■ Fittings : 1 Plastic Tray



ESD- 103T



■ Outside : H486 x W346 x D420mm
■ In - side : H366 x W226 x D260mm
■ Outside : H19 x W19 x D16inch
■ In-Side : H14 x W8 x D10inch
■ Approx Wt : 51Kg, 112Lbs
■ Fittings : 1 Plastic Tray



Passed 1hr fire rating

passed 2Hrs SP Fire rating /Certi No.106601/106602

passed 1Hrs JIS Fire rating / Certi No.9C7139/23722



SD- 104A

- Outside : H506 x W435 x D502mm ■ In-Side : H15 x W12 x D12 inch
- In - side : H386 x W315 x D325mm ■ Approx Wt : 73Kg, 161Lbs
- Outside : H19 x W17 x D19inch ■ Fittings : 1 Plastic Tray, 1 Adjustable shelf

Passed 1Hrs KS Fire rating



ESD- 104A

- Outside : H506 x W435 x D502mm ■ In-Side : H15 x W12 x D12 inch
- In - side : H386 x W315 x D325mm ■ Approx Wt : 73Kg, 161Lbs
- Outside : H19 x W17 x D19inch ■ Fittings : 1 Plastic Tray, 1 Adjustable shelf



ESD- 104AK

- Outside : H506 x W435 x D502mm ■ In-Side : H15 x W12 x D12 inch
- In - side : H386 x W315 x D325mm ■ Approx Wt : 73Kg, 161Lbs
- Outside : H19 x W17 x D19inch ■ Fittings : 1 Plastic Tray, 1 Adjustable shelf



SD- 680K

- Outside : H680 x W452 x D516mm ■ In-Side : H18 x W12 x D12 inch
- In - side : H480 x W312 x D324mm ■ Approx Wt : 94Kg, 207Lbs
- Outside : H26 x W17 x D20inch ■ Fittings : 1 Plastic Tray, 1 Adjustable shelf



SD- 680

- Outside : H680 x W452 x D516mm ■ In-Side : H18 x W12 x D12 inch
- In - side : H480 x W312 x D324mm ■ Approx Wt : 94Kg, 207Lbs
- Outside : H26 x W17 x D20inch ■ Fittings : 1 Plastic Tray, 1 Adjustable shelf



SD- 104K

- Outside : H628 x W494 x D550mm ■ In-Side : H16 x W13 x D13 inch
- In - side : H424 x W345 x D341mm ■ Approx Wt : 100Kg, 220Lbs
- Outside : H24 x W19 x D21inch ■ Fittings : 1 Plastic Tray, 2 Adjustable shelf



ESD- 104

- Outside : H628 x W494 x D550mm ■ In-Side : H16 x W13 x D13 inch
- In - side : H424 x W345 x D341mm ■ Approx Wt : 100Kg, 220Lbs
- Outside : H24 x W19 x D21inch ■ Fittings : 1 Plastic Tray, 2 Adjustable shelf



SD- 105K

- Outside : H718 x W494 x D550mm ■ In-Side : H20 x W13 x D13 inch
- In - side : H514 x W345 x D341mm ■ Approx Wt : 127Kg, 280Lbs
- Outside : H28 x W19 x D21inch ■ Fittings : 1 Plastic Tray, 2 Adjustable shelf



ESD- 105

- Outside : H718 x W494 x D550mm ■ In-Side : H20 x W13 x D13 inch
- In - side : H514 x W345 x D341mm ■ Approx Wt : 127Kg, 280Lbs
- Outside : H28 x W19 x D21inch ■ Fittings : 1 Plastic Tray, 2 Adjustable shelf



SD- 105A

- Outside : H675 x W478 x D533mm ■ In-Side : H18 x W12 x D12 inch
- In - side : H464 x W329 x D330mm ■ Approx Wt : 110Kg, 240Lbs
- Outside : H26 x W18 x D20inch ■ Fittings : 1 Plastic Tray, 2 Adjustable



ESD- 105A

- Outside : H675 x W478 x D533mm ■ In-Side : H18 x W12 x D12 inch
- In - side : H464 x W329 x D330mm ■ Approx Wt : 110Kg, 240Lbs
- Outside : H26 x W18 x D20inch ■ Fittings : 1 Plastic Tray, 2 Adjustable



ESD- 680

- Outside : H680 x W452 x D516mm ■ In-Side : H18 x W12 x D12 inch
- In - side : H480 x W312 x D324mm ■ Approx Wt : 94Kg, 207Lbs
- Outside : H26 x W17 x D20inch ■ Fittings : 1 Plastic Tray, 1 Adjustable shelf



Passed 1hr fire rating

passed 1Hrs JIS Fire rating /Certi No.02C095/JIS S- 1037
 passed NT Fire 017-90, SP Fire rating / Certi No.106602/SPCR002

 KSG 4500

Features

- ▶ Digital type ensures a high level of security through a feature that allows the user to change the combination of numbers. And an automatic lock system for the double security. It was also designed with user-friendly angles and color of buttons which increase its functionality.
- ▶ With its accurate recognition and exceptional security, we proudly present the line up of Bumil's high security package.
- ▶ Choice of lock system : Digital, Dial Combination, Fingerprint and two key type



SD- 106

- Outside : H850 x W580 x D553mm
- In - side : H623 x W433 x D345mm
- Outside : H33 x W22 x D21inch
- In-Side : H24 x W17 x D13 inch
- Approx Wt : 172Kg, 380Lbs
- Fittings : 1 Lockable Drawer, 1 Adjustable shelf



SD- 106A

- Outside : H1,000 x W580 x D553mm
- In - side : H773 x W433 x D345mm
- Outside : H39 x W22 x D21inch
- In-Side : H30 x W17 x D13 inch
- Approx Wt : 195Kg, 430Lbs
- Fittings : 1 Lockable Drawer, 2 Adjustable shelves



SD- 106K

- Outside : H850 x W580 x D553mm
- In - side : H623 x W433 x D345mm
- Outside : H33 x W22 x D21inch
- In-Side : H24 x W17 x D13 inch
- Approx Wt : 172Kg, 380Lbs
- Fittings : 1 Lockable Drawer, 1 Adjustable shelf



ESD- 106

- Outside : H850 x W580 x D553mm
- In - side : H623 x W433 x D345mm
- Outside : H33 x W22 x D21inch
- In-Side : H24 x W17 x D13 inch
- Approx Wt : 172Kg, 380Lbs
- Fittings : 1 Lockable Drawer, 1 Adjustable shelf



ESD- 106A

- Outside : H1,000 x W580 x D553mm
- In - side : H773 x W433 x D345mm
- Outside : H39 x W22 x D21inch
- In-Side : H30 x W17 x D13 inch
- Approx Wt : 195Kg, 430Lbs
- Fittings : 1 Lockable Drawer, 2 Adjustable shelves



ESD- 106Ak

- Outside : H1,000 x W580 x D553mm
- In - side : H773 x W433 x D345mm
- Outside : H39 x W22 x D21inch
- In-Side : H30 x W17 x D13 inch
- Approx Wt : 195Kg, 430Lbs
- Fittings : 1 Lockable Drawer, 2 Adjustable shelves



KSG 4500

- Outside : H1,400 x W750 x D687mm
- In - side : H1,173 x W603 x D469mm
- Outside : H55 x W29 x D21inch
- In-Side : H46 x W23 x D18 inch
- Approx Wt : 370Kg, 816Lbs
- Fittings : 1 Lockable Drawer, 3 Adjustable shelves

lock system



Digital Type

This product is equipped with a digital lock that can be unlocked by entering 2 - 10 digits. The position and angle of the key pad allows users to enter these digits most conveniently. In anticipation of unforeseeable trouble, there is also an override code provided for safety.-



Fingerprint Type

The level of security of this safe is exceptional, because after you initially store your fingerprints and then scan your finger to open the door, the safe will verify the stored fingerprints and then transmit the signal.

Since the registered fingerprint is the only key, it eliminates the inconvenience of carrying a key around and the danger of copying the key or losing it, thus this system ensures safety and security.

Foot(H) 80mm & Facial(D) 37mm is included



LOTFY GROUP



LOTFY GROUP

Fire Filing Cabinet



«Easy Filing, Fittest Cabinet for Your Valuable Documents»

The Cabinet has specially designed structure and manufactured for convenient file sorting with excellent fire resistance. Top drawer controls all of drawer's locking & unlocking with double-locking system. And various locking system for user purpose is provided. This option is given a favourable reception from government organizations, companies, banks and army.



DSF680-40



DSF680-4EA



BF680-4EB



DSF680-4EG



D Combination Dial



EA Electronic Digital



EB Electronic Digital



EC Electronic Digital



DSF Zinc-Cast Handle



BF Zinc-Cast Handle



Fingerprint

Product data

Model	Heightmm	Widthmm	Depthmm	Approx. Wt(kgs)	Remarks
DSF/BF680-2	823	530	680	163	
DSF/BF680-3	1186	530	680	222	
DSF/BF680-4	1549	530	680	300	Front projection DSF : 32mm(Handle) BF : 31mm (Digital) 28mm (combination)

★ Caster(55mm) is included

Features

- The cabinet protects the valuable documents from fire.
- A4 & B4 is stored and easy file sorting.
- 4 Kinds of locking system are available for your purpose.
- Certified 1 hr fireproof test (UL,SP,JIS,KS)

- Various design and size is provided for user favour.
- Specially designed structure and material blocks heavy fire.
(Material : Graphite based expansion fire protection material)



DSF680-2F

DSF680-2 Outside : H823 x W530 x D680mm Approx Wt : 163kg
DSF680-4 Outside : H1,549 x W530 x D680mm Approx Wt : 300kg



A4 & B4 is compatible



Special laminate & 70mm door protect your valuable data from unforeseeable fire

Certificates & Test reports

Bumil safes are tested and approved annually in compliance with the stringent test methods by the international certificate institute UL, JIS, SP, KS



UL(R18040)



SP(106605)



JIS(03C050)





KS(4500)



ISO9002

Fire endurance test

1. Standard heating test (UL,SP,JIS,KS) - the safe is preheated to 928 C (standard heating temp) and last for 1 hour.
2. Explosion hazard test at UL - the closed furnace is preheated to 1,093 C and maintain furnace temp for 30min at 1,093c.
3. Test results - 4 thermocouples placed inside the safe should not exceed 177C and newsprint and/or crumpled paper ball are readable without scorch and burn out.

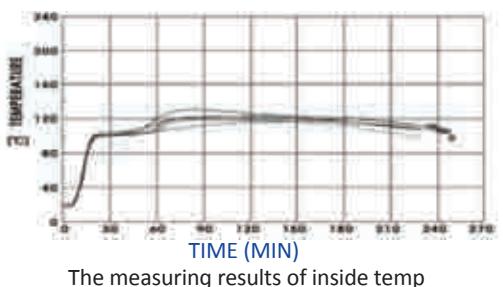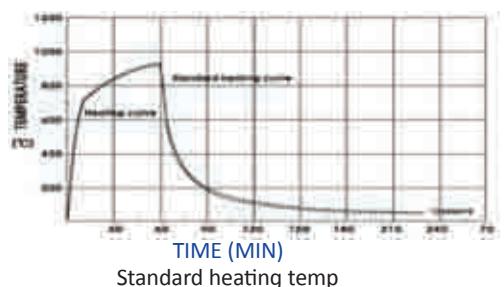

contents



LOTFY GROUP

5 Taha Hussin St., El Nozha, El Gededa, Cairo, Egypt.
Tel.: 002 02 2623 1942 - 002 0127 606 1063
002 0128 7060 298