DS2003 High Current/Voltage Darlington Drivers

FEATURES

- Seven High Gain Darlington Pairs
- 7 개의 High Gain Darlington Pair

- High Output Voltage (VCE = 50V)
- 높은 출력 전압 (VCE = 50V)

- High Output Current (IC = 350 mA)
- 높은 출력 전류 (IC = 350 mA)

- TTL, PMOS, CMOS Compatible
- TTL, PMOS, CMOS 호환

- Suppression Diodes for Inductive Loads
- 유도 부하를 위한 억제 다이오드

- Extended Temperature Range
- 확장 온도 범위

DESCRIPTION

The DS2003 comprises seven high voltage, high current NPN Darlington transistor pairs.
DS2003은 7 개의 고전압, 고전류 NPN Darlington transistor 쌍으로 구성됩니다.

All units feature a common emitter and open collector outputs.
모든 unit에는 공통 emitter 및 open collector 출력이 있습니다.

To maximize their effectiveness, these units contain suppression diodes for inductive loads and appropriate emitter base resistors for leakage.
이 장치의 효율성을 극대화하기 위해 이 장치에는 유도 부하 용 suppression diode(억제 다이오드) 와 누출을 위한 적절한 emitter base resistor가 포함되어 있습니다.

The DS2003 has a series base resistor to each Darlington pair, thus allowing operation directly with TTL or CMOS operating at supply voltages of 5.0V.

DS2003은 각 Darlington 쌍에 series base resistor(직렬 베이스 저항)을 가지고 있어 5.0V의 공급 전압에서 TTL 또는 CMOS 동작으로 직접 동작 할 수 있다.

The DS2003 offers solutions to a great many interface needs, including solenoids, relays, lamps, small motors, and LEDs.

DS2003은 solenoids, relays, lamps, small motors, 그리고 LED를 포함한 많은 interface 요구 사항에 대한 솔루션을 제공합니다.

Applications requiring sink currents beyond the capability of a single output may be accommodated by paralleling the outputs.

단일 출력 기능을 넘어서는 sink current를 필요로 하는 Application은 출력을 병렬 연결하여 수용 할 수 있습니다.

DS2003 High Current/Voltage Darlington Drivers

Check for Samples: DS2003

FEATURES

- **Seven High Gain Darlington Pairs**
- **High Output Voltage (V_{CE} = 50V)**
- **High Output Current (I_C = 350 mA)**
- **TTL, PMOS, CMOS Compatible**
- **Suppression Diodes for Inductive Loads**
- **Extended Temperature Range**

DESCRIPTION

The DS2003 comprises seven high voltage, high current NPN Darlington transistor pairs. All units feature a common emitter and open collector outputs. To maximize their effectiveness, these units contain suppression diodes for inductive loads and appropriate emitter base resistors for leakage.

The DS2003 has a series base resistor to each Darlington pair, thus allowing operation directly with TTL or CMOS operating at supply voltages of 5.0V.

The DS2003 offers solutions to a great many interface needs, including solenoids, relays, lamps, small motors, and LEDs. Applications requiring sink currents beyond the capability of a single output may be accommodated by paralleling the outputs.
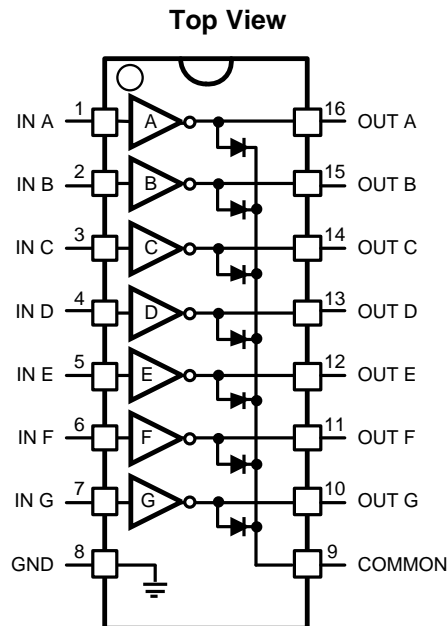
Connection Diagram

Top View

Figure 1.

These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

Absolute Maximum Ratings[(1)(2)]

Storage Temperature Range	−65°C to +150°C
Operating Temperature Range, T_A	
DS2003T	−40°C to +125°C
DS2003C	−40°C to +85°C
Junction Temperature Range, T_J	−40°C to +150°C
Lead Temperature	
Soldering, 10 seconds	265°C
ESD Ratings	
Human Body Model	+/-2000V
Machine Model	+/- 200V
Package Thermal Dissipation Ratings	
NFG0016E Package θ_{J-A}	88°C/W
D0016A Package θ_{J-A}	115°C/W
Input Voltage	−0.3V to 30V
Output Voltage	55V
Emitter-Base Voltage	6.0V
Continuous Collector Current	500 mA
Continuous Base Current	25 mA

(1) "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be specified. They are not meant to imply that the devices should be operated at these limits. The Electrical Characteristics provide conditions for actual device operation.
(2) If Military/Aerospace specified devices are required, please contact the TI Sales Office/Distributors for availability and specifications.

Electrical Characteristics

T_A = 25°C, unless otherwise specified [(1)]

Parameter		Test Conditions	Min	Typ	Max	Units
I_{CEX}	Output Leakage Current	T_A = 25°C, V_{CE} = 50V (Figure 6)			20	µA
		T_A = 85°C, V_{CE} = 50V (Figure 6)			100	
		T_A = 125°C, V_{CE} = 50V (Figure 6) for DS2003T			150	
$V_{CE(Sat)}$	Collector-Emitter Saturation Voltage	I_C = 350mA, I_B = 500µA (Figure 8)[(2)]		1.25	1.6	V
		I_C = 200mA, I_B = 350µA (Figure 8)		1.1	1.3	
		I_C = 100mA, I_B = 250µA (Figure 8)		0.9	1.1	
$I_{I(ON)}$	Input Current	V_I = 3.85V (Figure 9)		0.93	1.35	mA
$I_{I(OFF)}$	Input Current [(3)]	I_C = 500µA (Figure 10)	50	100		µA
		T_A = +25°C	50	100		
		T_A = +85°C	25	50		
		T_A = +125C for DS2003T	10	25		
$V_{I(ON)}$	Input Voltage [(4)]	V_{CE} = 2.0V, I_C = 200mA (Figure 11)			2.4	V
		V_{CE} = 2.0V, I_C = 250mA (Figure 11)			2.7	
		V_{CE} = 2.0V, I_C = 300mA (Figure 11)			3.0	
C_I	Input Capacitance			15	30	pF
t_{PLH}	Turn-On Delay	0.5 V_I to 0.5 V_O			1.0	µs
t_{PHL}	Turn-Off Delay	0.5 V_I to 0.5 V_O			1.0	µs

(1) All limits apply to the complete Darlington series except as specified for a single device type.
(2) Under normal operating conditions these units will sustain 350 mA per output with $V_{CE\ (Sat)}$ = 1.6V at 70°C with a pulse width of 20 ms and a duty cycle of 30%.
(3) The $I_{I(OFF)}$ current limit ensured against partial turn-on of the output.
(4) The $V_{I(ON)}$ voltage limit ensures a minimum output sink current per the specified test conditions.

Product Folder Links: DS2003

Electrical Characteristics (continued)

T_A = 25°C, unless otherwise specified [1]

Parameter		Test Conditions	Min	Typ	Max	Units
I_R	Clamp Diode Leakage Current	V_R = 50V (Figure 12)				µA
		T_A = 25°C		5	10	
		T_A = 85°C		10	50	
		T_A = 125°C for DS2003T		20	100	
V_F	Clamp Diode Forward Voltage	I_F = 350mA (Figure 13)		1.7	2.0	V

Typical Performance Characteristics

**Collector Current vs
Saturation Voltage**

Figure 2.

**Collector Current vs
Input Current**

Figure 3.

**Input Current vs
Input Voltage**

Figure 4.

**Peak Collector Current vs
Duty Cycle and Number of
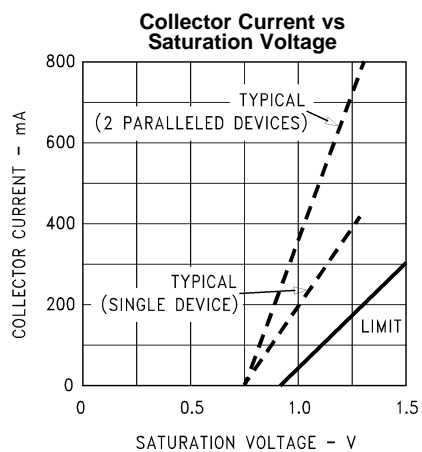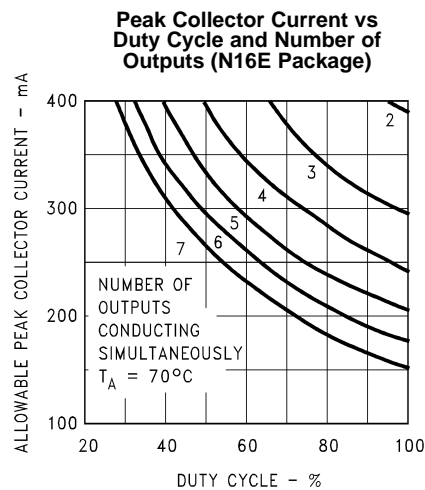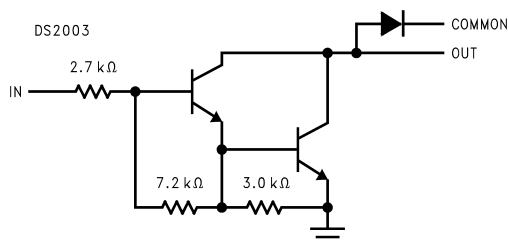Outputs (N16E Package)**
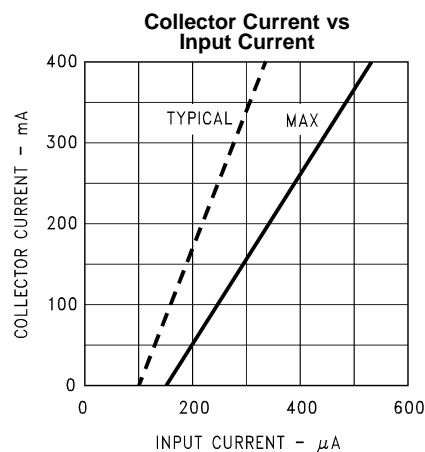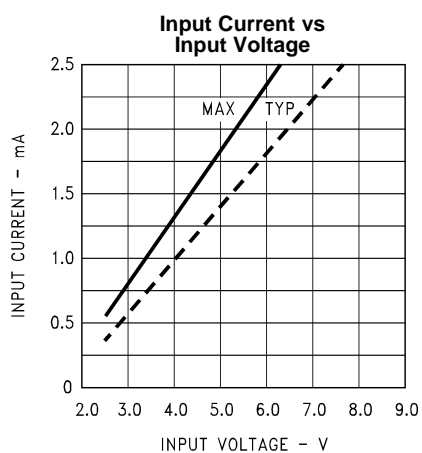
Figure 5.

EQUIVALENT CIRCUITS


Test Circuits

Figure 6.

Figure 7.

Figure 8.

Figure 9.


Figure 10.

Figure 11.
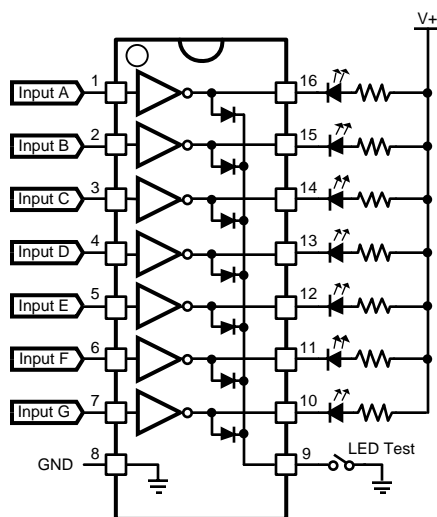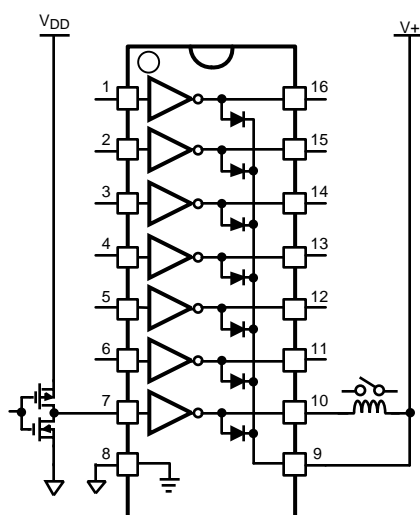

Figure 12.

Figure 13.

Typical Applications

Figure 14. Typical LED Driver

Figure 15. Typical Relay Driver

REVISION HISTORY

Changes from Revision I (April 2013) to Revision J **Page**

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
DS2003CM	NRND	SOIC	D	16	48	TBD	Call TI	Call TI	-40 to 85	DS2003CM	
DS2003CM/NOPB	ACTIVE	SOIC	D	16	48	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 85	DS2003CM	Samples
DS2003CMX/NOPB	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 85	DS2003CM	Samples
DS2003TM	NRND	SOIC	D	16	48	TBD	Call TI	Call TI	-40 to 125	DS2003TM	
DS2003TM/NOPB	ACTIVE	SOIC	D	16	48	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 125	DS2003TM	Samples
DS2003TMX	NRND	SOIC	D	16	2500	TBD	Call TI	Call TI	-40 to 125	DS2003TM	
DS2003TMX/NOPB	ACTIVE	SOIC	D	16	2500	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 125	DS2003TM	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

PACKAGE MATERIALS INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

TAPE DIMENSIONS

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
DS2003CMX/NOPB	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.3	8.0	16.0	Q1
DS2003TMX	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.3	8.0	16.0	Q1
DS2003TMX/NOPB	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.3	8.0	16.0	Q1

TAPE AND REEL BOX DIMENSIONS

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
DS2003CMX/NOPB	SOIC	D	16	2500	367.0	367.0	35.0
DS2003TMX	SOIC	D	16	2500	367.0	367.0	35.0
DS2003TMX/NOPB	SOIC	D	16	2500	367.0	367.0	35.0

D (R−PDSO−G16) PLASTIC SMALL OUTLINE

0.394 (10,00)
0.386 (9,80)
⚠C

16   9

0.244 (6,20)
0.228 (5,80)

0.157 (4,00)
0.150 (3,80) ⚠D

1   8

Pin 1
Index Area

0.050 (1,27)

0.020 (0,51)
0.012 (0,31)

⊕ 0.010 (0,25) Ⓜ

0.069 (1,75) Max

0.010 (0,25)
0.004 (0,10)

0.010 (0,25)
0.005 (0,13)

0.004 (0,10)

Gauge Plane

Seating Plane

0.010 (0,25)   0°−8°

0.050 (1,27)
0.016 (0,40)

4040047-6/M 06/11

NOTES: A. All linear dimensions are in inches (millimeters).
        B. This drawing is subject to change without notice.
     ⚠C Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall
            not exceed 0.006 (0,15) each side.
     ⚠D Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
        E. Reference JEDEC MS−012 variation AC.

TEXAS INSTRUMENTS
www.ti.com

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have *not* been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products		Applications	
Audio	www.ti.com/audio	Automotive and Transportation	www.ti.com/automotive
Amplifiers	amplifier.ti.com	Communications and Telecom	www.ti.com/communications
Data Converters	dataconverter.ti.com	Computers and Peripherals	www.ti.com/computers
DLP® Products	www.dlp.com	Consumer Electronics	www.ti.com/consumer-apps
DSP	dsp.ti.com	Energy and Lighting	www.ti.com/energy
Clocks and Timers	www.ti.com/clocks	Industrial	www.ti.com/industrial
Interface	interface.ti.com	Medical	www.ti.com/medical
Logic	logic.ti.com	Security	www.ti.com/security
Power Mgmt	power.ti.com	Space, Avionics and Defense	www.ti.com/space-avionics-defense
Microcontrollers	microcontroller.ti.com	Video and Imaging	www.ti.com/video
RFID	www.ti-rfid.com		
OMAP Applications Processors	www.ti.com/omap	**TI E2E Community**	e2e.ti.com
Wireless Connectivity	www.ti.com/wirelessconnectivity		