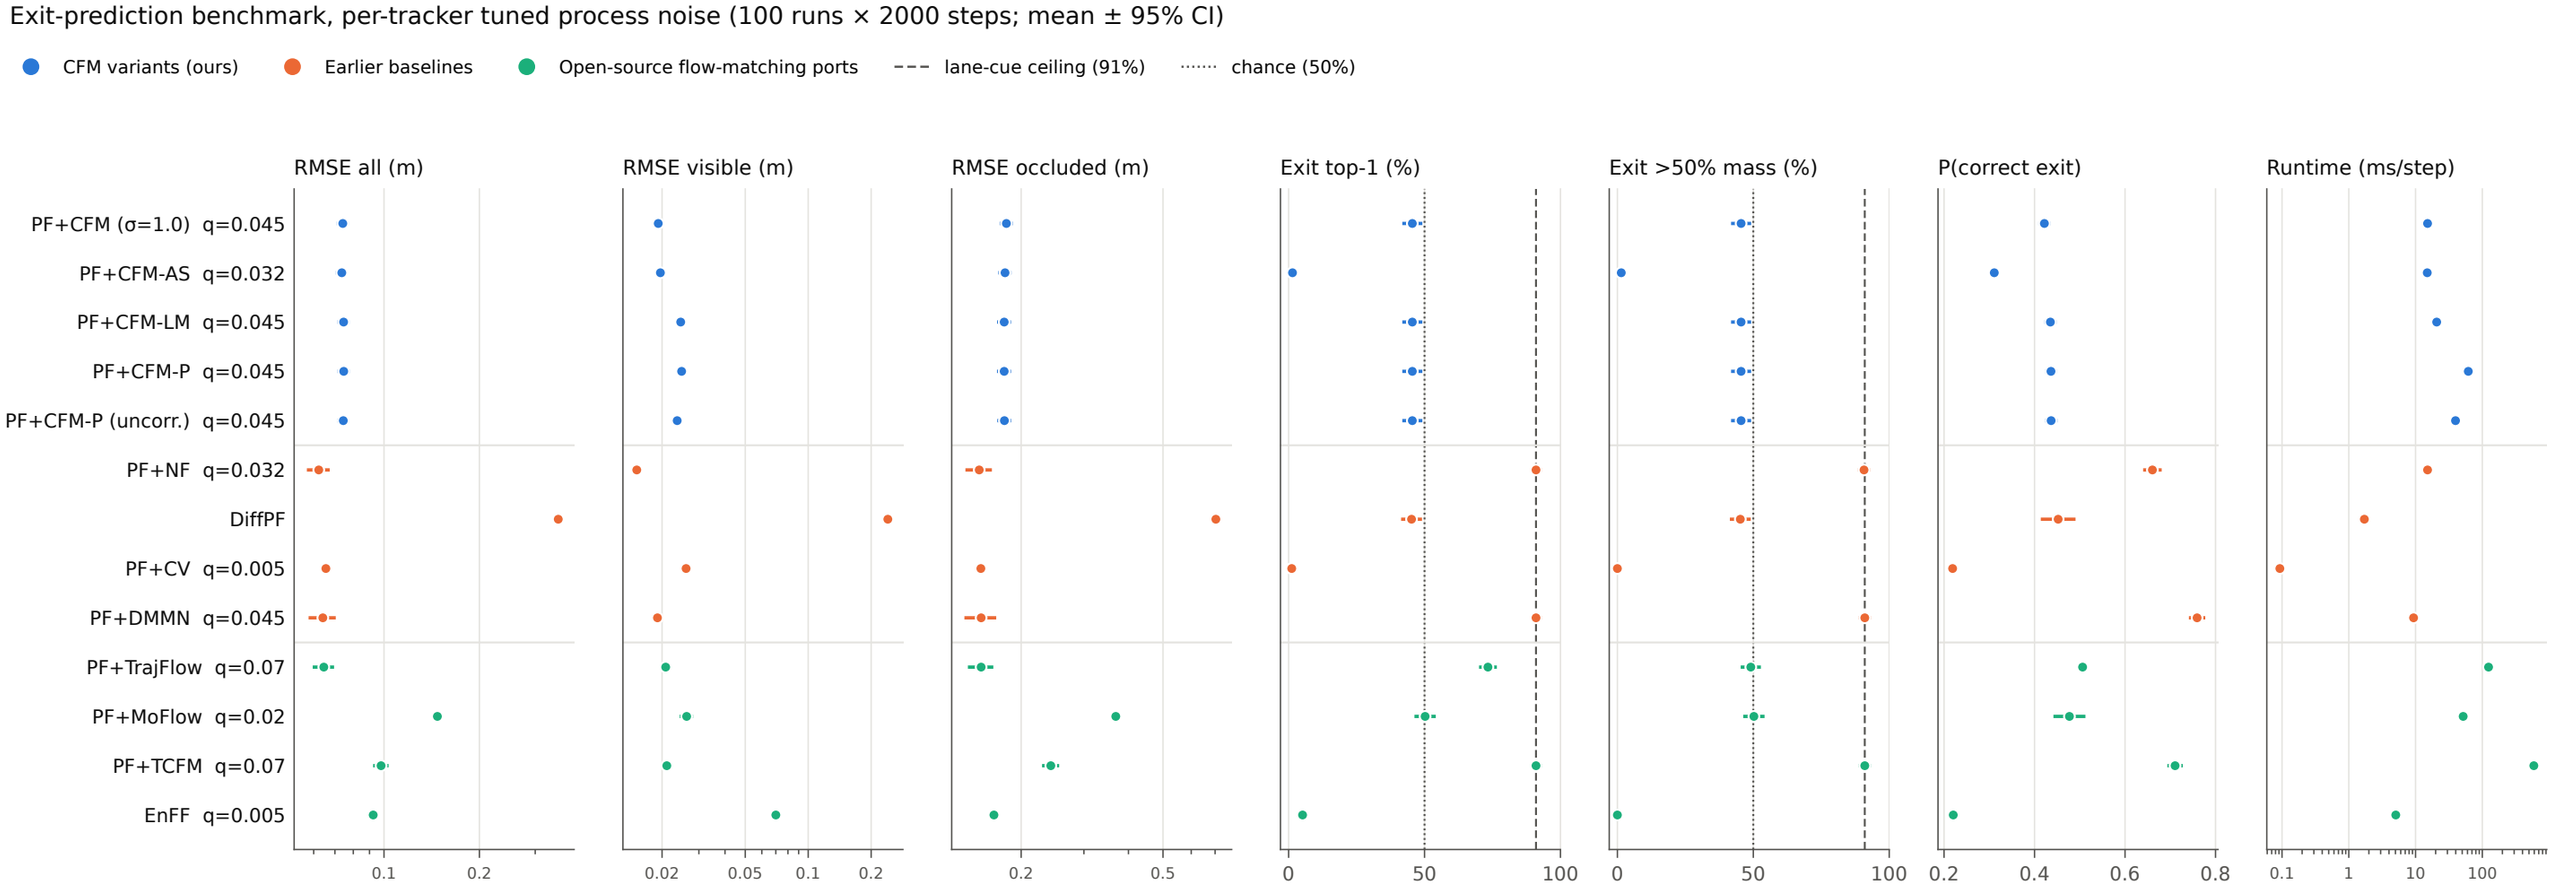
Exit-prediction benchmark, per-tracker tuned process noise (100 runs × 2000 steps; mean ± 95% CI)
CFM variants (ours)
Earlier baselines
Open-source flow-matching ports
lane-cue ceiling (91%)
chance (50%)
RMSE all (m)
RMSE visible (m)
RMSE occluded (m)
Exit top-1 (%)
Exit >50% mass (%)
P(correct exit)
Runtime (ms/step)
PF+CFM (σ=1.0) q=0.045
PF+CFM-AS q=0.032
PF+CFM-LM q=0.045
PF+CFM-P q=0.045
PF+CFM-P (uncorr.) q=0.045
PF+NF q=0.032
DiffPF
PF+CV q=0.005
PF+DMMN q=0.045
PF+TrajFlow q=0.07
PF+MoFlow q=0.02
PF+TCFM q=0.07
EnFF q=0.005
0.1
0.2
0.02
0.05
0.1
0.2
0.2
0.5
0
50
100
0
50
100
0.2
0.4
0.6
0.8
0.1
1
10
100