
DeePoint


In-Stock Product Catalog

Battery | Solar Street Light

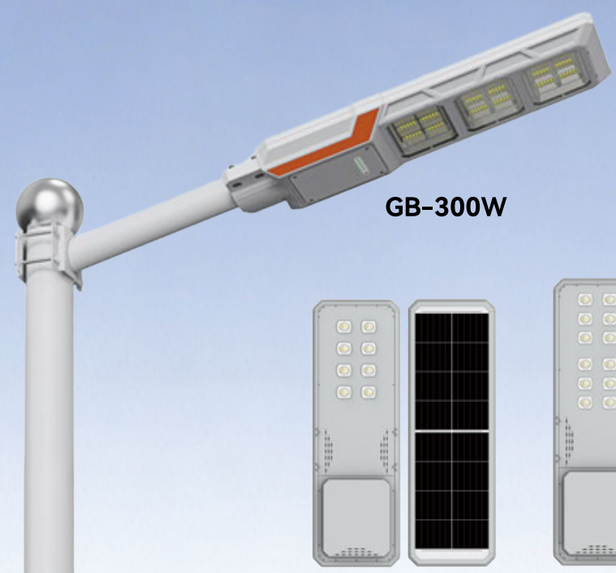


GB-300W

LA-Pro-60W



LA-Pro-80W




LA-Pro-100W



12.8V100Ah



12.8V200Ah

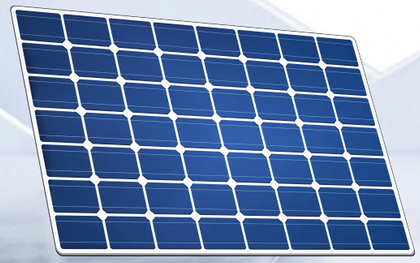



12.8V300Ah



25.6V100Ah



www.deepoint.net

Ningbo Deepoint Technologies Co., Ltd.

Office Adress: Room 807, Huanling Future Building, Ningbo High-Tech Zone, Ningbo, Zhejiang, China.
Factory Address: 5th Floor, Building 6, Pufei Kechuang Park, No.15 Zhian North Road, Jun'an Town, Shunde District, Foshan City, China.

v.102726



DP-12100
(12.8V 100AH)


Technical Specifications

Model Number	DP-12100
Nominal Voltage	12.8V
Rated Capacity	100 Ah
Energy	1280Wh
Cycle Life	>3000 Cycles @0.5C
Model	SP50160119F
Typical Capacity	100AH
Rated Voltage	3.2V
Cell Configuration	4S1P
Charge Voltage	14.4V±0.2V
Charge Mode	0.5C to 14.4V,then 14.4V,charge current to 0.02C(CC/Cv)
Charge Current	50A
Max. Charge Current	100A
Max. Continuous Discharge Current	100A
Discharge Cut-off Voltage	10V
Charge Temperature Range	0°C to 55 °C(32F to 113F)@60±25% Relative Humidity
Discharge Temperature Range	-20 °C to 55 °C (-4F to 140F) @60±25% Relative Humidity
Storage Temperature Range	0 °C to 40 °C(32F to 104F)@60+25%Relative Humidity
Ingress Protection (IP Rating)	Ip65
Enclosure Material	ABS
Dimensions (mm)	318*184*196mm
Weight (kg)	9.5KG

Product Features

- Balanced, safe, long-cycle, and durable lithium iron phosphate battery cells
- Built-in automatic overcharge, over-discharge, overcurrent, and over-temperature protection
- Maintenance-free design, requiring no daily care
- Supports series connection for flexible expansion and multiple application scenarios
- Wide temperature range, operating normally from -20℃ to 60℃
- Maintenance-free design, requiring no daily care

Technical Specifications

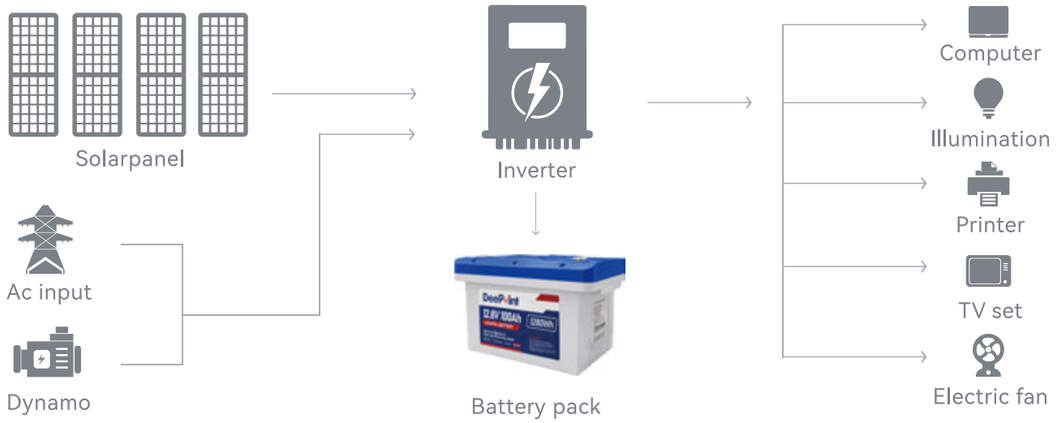



DP-12200
(12.8V 200AH)


Technical Specifications

Model Number	DP-12200
Nominal Voltage	12.8V
Rated Capacity	200 Ah
Energy	2560 Wh
Cycle Life	≥3000 Cycles @0.5C
Model	GSP54173200F
Typical Capacity	200AH
Rated Voltage	3.2V
Cell Configuration	4S1P
Charge Voltage	14.4V±0.2V
Charge Mode	0.5C to 14.4V,then 14.4V,charge current to 0.02C(CC/Cv)
Charge Current	100A
Max. Charge Current	150A
Max. Continuous Discharge Current	150A
Discharge Cut-off Voltage	10V
Charge Temperature Range	0℃ to 55 ℃(32F to 113F)@60±25% Relative Humidity
Discharge Temperature Range	-20 ℃ to 55 ℃ (-4F to 140F) @60±25% Relative Humidity
Storage Temperature Range	0 ℃ to 40 ℃(32F to 104F)@60+25%Relative Humidity
Ingress Protection (IP Rating)	IP65
Enclosure Material	ABS
Dimensions (mm)	302*214*258mm
Weight (kg)	19.5KG

Product Features

- Balanced, safe, long-cycle, and durable lithium iron phosphate battery cells
- Built-in automatic overcharge, over-discharge, overcurrent, and over-temperature protection
- Maintenance-free design, requiring no daily care
- Supports series connection for flexible expansion and multiple application scenarios
- Wide temperature range, operating normally from -20℃ to 60℃
- Maintenance-free design, requiring no daily care

Technical Specifications

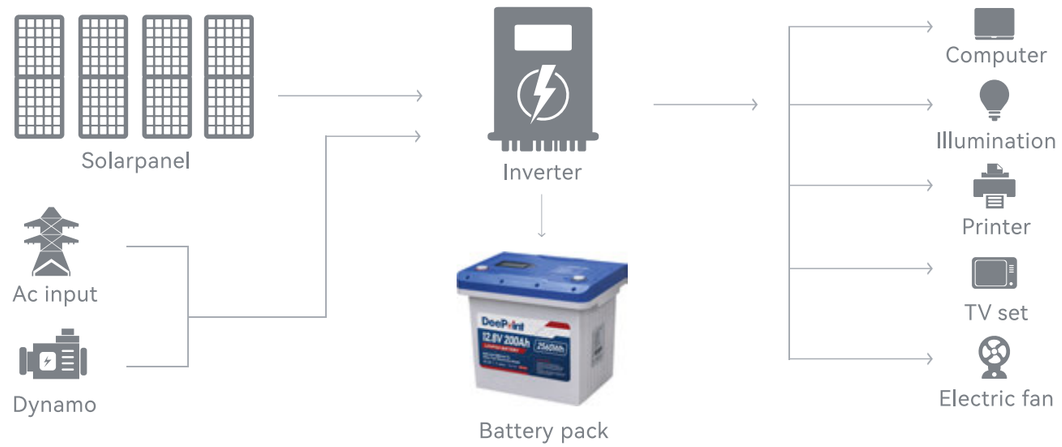

DP-12300
(12.8V 300AH)




Technical Specifications

Model Number	DP-12300
Nominal Voltage	12.8V
Rated Capacity	300Ah
Energy	3840Wh
Cycle Life	≥6000 Cycles @0.5C
Model	GSP71173204F
Typical Capacity	300AH
Rated Voltage	3.2V
Cell Configuration	4S1P
Charge Voltage	14.4V±0.2V
Charge Mode	0.5C to 14.4V,then 14.4V,charge current to 0.02C(CC/Cv)
Charge Current	150A
Max. Charge Current	150A
Max. Continuous Discharge Current	150A
Discharge Cut-off Voltage	10V
Charge Temperature Range	0°C to 55 °C(32F to 113F)@60±25% Relative Humidity
Discharge Temperature Range	-20 °C to 55 °C (-4F to 140F)@60±25% Relative Humidity
Storage Temperature Range	0 °C to 40 °C(32F to 104F)@60+25%Relative Humidity
Ingress Protection (IP Rating)	IP65
Enclosure Material	ABS
Dimensions (mm)	379*218*262mm
Weight (kg)	26KG

Product Features

- Balanced, safe, long-cycle, and durable lithium iron phosphate battery cells
- Built-in automatic overcharge, over-discharge, overcurrent, and over-temperature protection
- Maintenance-free design, requiring no daily care
- Supports series connection for flexible expansion and multiple application scenarios
- Wide temperature range, operating normally from -20°C to 60°C
- Maintenance-free design, requiring no daily care

Technical Specifications

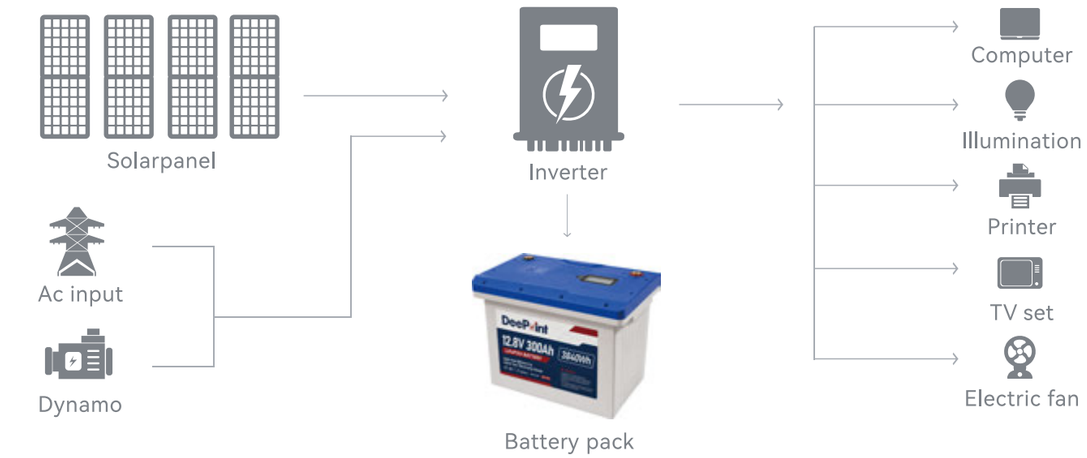

DP-12400
(25.6V 100AH)




Technical Specifications

Model Number	DP-12400
Nominal Voltage	25.6V
Rated Capacity	2560Wh（100Ah）
Energy	2560Wh
Cycle Life	≥6000 Cycles @0.5C
Model	25.6V 100AH
Typical Capacity	100Ah
Rated Voltage	25.6V
Cell Configuration	8S1P
Charge Voltage	28.8V
Charge Mode	0.5C to 14.4V,then 14.4V,charge current to 0.02C(CC/Cv)
Charge Current	50A
Max. Charge Current	100A
Max. Continuous Discharge Current	100A
Discharge Cut-off Voltage	20V
Charge Temperature Range	0°C to 55 °C(32F to 113F)@60±25% Relative Humidity
Discharge Temperature Range	-20 °C to 55 °C (-4F to 140F)@60±25% Relative Humidity
Storage Temperature Range	0 °C to 40 °C(32F to 104F)@60+25%Relative Humidity
Ingress Protection (IP Rating)	IP65
Enclosure Material	ABS
Dimensions (mm)	375 × 229 × 262 mm
Weight (kg)	26KG

Product Features

- Balanced, safe, long-cycle, and durable lithium iron phosphate battery cells
- Built-in automatic overcharge, over-discharge, overcurrent, and over-temperature protection
- Maintenance-free design, requiring no daily care
- Supports series connection for flexible expansion and multiple application scenarios
- Wide temperature range, operating normally from -20°C to 60°C
- Maintenance-free design, requiring no daily care

Technical Specifications

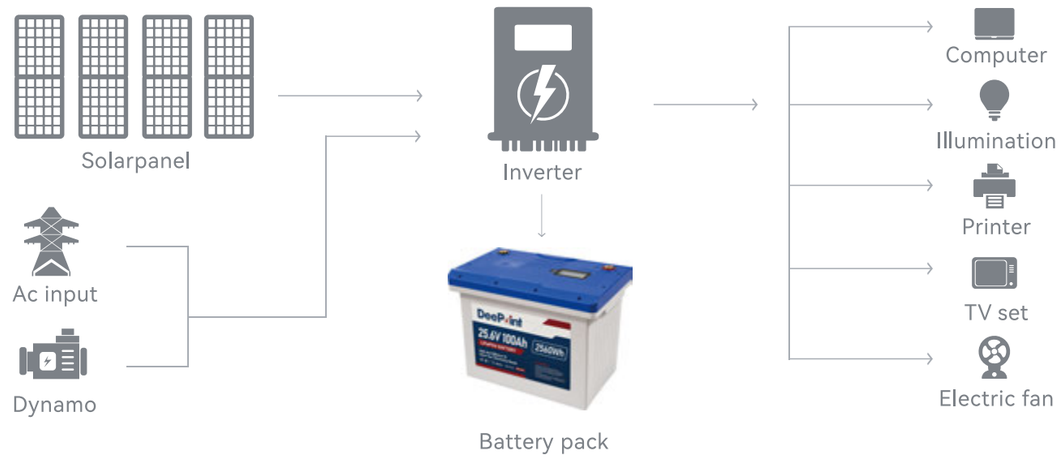

www.deepoint.net

DeePoint

GB Series

300W

Product description

- High quality LiFePO4 battery High brightness LED for longer life
- Intelligent light controller
- Higher efficiency of monocrystalline silicon solar panels
- Integrated design

Intelligent lighting control | Engineering quality | Solar charging | Built-in battery


GB Series

Integrated solar street lamp

GB-300W









Lithium iron phosphate battery



3030 LED Chip



Integrated high technologies




High-efficient Mono solar panel(> 25%)

Parameters

Model	GB-300W
Luminous	1500LM
Mono Solar panel	20W
Battery	3.2V15000mAH
Lamp Size	650*220*55MM
LED Quantity	450PCS
Solar Panel Size	535*200MM
Height of installation	5-6M
Waterproof Level	IP65
Charging time	4-5H
Working time	12-24H
Emitting angle	110°*110°
Lighting mode	Lighting control+Reaction
RA	⩾80
Kelvin	6500K

Distribution curve




Unit of radiation intensity: od

C0/180 81.2

C90/270 148.5

Main light Angle: 114.8°C



Light intensity unit: cd

C0/180 81.2

C90/270 148.5

DeePoint

LA-Pro Series

60/80/100W

Product description

- Integrated design, high-capacity LiFePO4 lithium battery, high energy, long life, light weight, green ecological environment protection, does not produce any harmful substances
- Philips LED3030 chip, high light efficiency, up to 200L MW, the whole light effect can reach at least 190LM/W.
- All series use efficient intelligent controller, charging efficiency can be increased by 15%-30%
- High efficiency solar cell design (> 22%)
- Easy installation and maintenance, no cable installation or special light pole, modular design of functional components, easy installation and maintenance

Intelligent lighting control | Engineering quality | Solar charging | Built-in battery

LA-Pro Series

Integrated solar street lamp


LA-Pro-60/80/100W



LA-Pro-60W



LA-Pro-80W

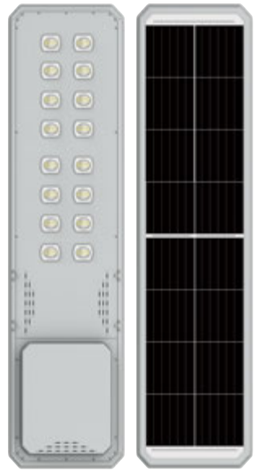

LA-Pro-100W




Lithium iron phosphate battery



Philips LED Chip




Integrated high technologies



High-efficient Mono solar panel(> 25%)

Model	LA-Pro-60W	LA-Pro-80W	LA-Pro-100W
LED power	15W	20W	25W
Mono Solar panel	4.8V- 60W	4.8V-80W	4.8V-100W
Battery	3.2V60AH	3.2V75AH	3.2V90AH
Height of installation	6-8M	8-10M	10-12M
Waterproof Level	IP65	IP65	IP65
Charging time	4-5H	4-5H	4-5H
Working time	12-24H	12-24H	12-24H
Emitting angle	70°*140°	70°*140°	70°*140°
Lighting mode	Lighting contro	Lighting contro	Lighting contro
RA	⩾80	⩾80	⩾80
Kelvin	6500K	6500K	6500K

Distribution curve




Main light Angle: 114.8°C

Unit of radiation intensity: od

C0/180 81.2

C90/270 148.5



Light intensity unit: cd

C0/180 81.2

C90/270 148.5