

Small-Scale C&I Energy Storage Solution

BOS-G

BOS-G

10-Year Warranty
Safest LFP battery & Intelligent BMS

Battery Protection
Auto charge/discharge & Cell voltage balancing

Flexible Expansion
Support 3 ~ 12 packs in series

Intelligent Control
Over-discharge/charge/current and temp protection

High-Efficiency Use
Low self-discharge for 6 months & No memory effect

Smart Control
Remote monitoring, management, and upgrades

Small-Scale C&I Energy Storage Solution



Model	BOS-GX (X=15,20,25,30,35,40,45,50,55,60)									
Main Parameters										
Cell Chemistry	$LiFePO_4$									
Module Energy (kWh)	5.12									
Module Nominal Voltage (V)	51.2									
Module Capacity (Ah)	100									
Battery Module Number	BOS-G15	BOS-G20	BOS-G25	BOS-G30	BOS-G35	BOS-G40	BOS-G45	BOS-G50	BOS-G55	BOS-G60
Battery Module Qty In Series (Optional)	3	4	5	6	7	8	9	10	11	12
System Nominal Voltage (V)	153.6	204.8	256	307.2	358.4	409.6	460.8	512	563.2	614.4
System Operating Voltage (V)	124.8~175.2	166.4~233.6	208~292	249.6~350.4	291.2~408.8	332.8~467.2	374.4~525.6	416~584	457.6~642.4	499.2~700
System Energy (kWh)	15.36	20.48	25.6	30.72	35.84	40.96	46.08	51.2	56.32	61.44
System Usable Energy (kWh)	15.36	20.48	25.6	30.72	35.84	40.96	46.08	51.2	56.32	61.44
Rated DC Power	15.36	20.48	25.6	30.72	35.84	40.96	46.08	51.2	56.32	61.44
Charge / Discharge[2] Current (A) — Recommend	50									
Charge / Discharge[2] Current (A) — Nominal	100									
Charge / Discharge[2] Current (A) — Peak Discharge (2 mins, 25°C)	125									
Working Temperature (°C)	Charge : 0 ~ 55 / Discharge : -20~55									
Status Indicator	Yellow : Battery High Voltage Power On Red : Battery System Alarm									
Communication Port	CAN2.0 / RS485									
Humidity	5% ~ 85%RH									
Altitude	≤2000m									
IP Rating of Enclosure	IP20									
Dimension (W × D × H, mm)	530 × 602 × 1629						530 × 602 × 2219			
Weight Approximate (kg)	195	240	285	330	375	420	475	520	565	610
Installation Location	Rack Mounting									
Storage Temperature (°C)	0 ~ 35									
Recommend Depth of Discharge	100%									
Cycle Life	25±2°C, 0.5C/0.5C, EOL70%≥6000									
Warranty[3]	10 years									
Certificatio	CE / IEC62619 / VDE2510-50 / UL1973 / UL9540A / UN38.3									

1. DC Usable Energy, test conditions : 100% DOD, 0.2C charge & discharge at 25°C. System usable energy may vary due to system configuration parameters. 2. The current is affected by temperature and SOC.
3. The warranty is due whichever reached first of warranty period or life cycle power.
4. Made in China.

Model	BOS-G
HVB750V / 100A-EU	High Voltage Battery cluster control box conforming to European or British Standards

Operating Voltage	120 ~ 750Vdc
Nominal Charge / Discharge Current	100A
Max.Charge / Discharge Current	125A
DC Input Rating	12±2%V/4.15A
Operating Temperature Range	-20 ~ 65°C
Ingress Protection	IP20
Dimension (W × D × H)	440 × 570 × 150mm
Weight Approximate	19kg



BOS-GM5.1	5.12 kwh battery module

Battery Type	$LiFePO_4$ (LFP)
Nominal Voltage	51.2Vdc
Rated Capacity	100Ah
Rated Energy	5.12kWh
Nominal Charge / Discharge Current	100A
Peak.Discharge Current	125A
Charge Temperature	0 ~ 55°C
Discharge Temperature	-20°C ~ 55°C
Storage Temperature	0°C ~ 35°C
Ingress Protection	IP20
Dimension (W × D × H)	440 × 570 × 133mm
Weight Approximate	45kg






Battery module Standard configuration:
① 110mm communication cable
② 200mm power cable


Model	BOS-G
EPCable5.0 (Optional)	Standard 5-meter power cable connected to the positive pole of the external PCS
1000V / 4AWG cable	
ENCable5.0 (Optional)	Standard 5-meter power cable connected to the negative pole of the external PCS
1000V / 4AWG cable	
EPWR Cable5.0 (Optional)	Standard 5-meter cable connected to external 12VDC power supply
	
ECOM Cable5.0 (Optional)	Standard 5-meter commumication cable connected to the external device
	
3U-HRACK (Optional)	Standard 19inch rack, caninstall 12 pcs batteries and 1 pcs High Voltage Battery cluster control box
Dimension (W × D × H) Weight Approximate	530 × 602 × 2 51kg
	 HRACK(SKU:10100401000078) Can be installed with an optional door.
3U-LRACK (Optional)	Standard 19inch rack, caninstall 8 pcs batteries and 1 pcs High Voltage Battery cluster control box
Dimension (W × D × H) Weight Approximate	530× 602× 1629mm 41kg
	 LRACK(SKU:10100401000079) Can be installed with an optional door.

Product Expansion

Battery backup time	BOS-G			
Inverter	1h	2h	3h	4h
SUN-30K-SG01HP3-AU-BM3	6 units	12 units	9 units × 2	12 units × 2
SUN-50K-SG01HP3-AU-BM4	10 units	10 units × 2	10 units × 3	10 units × 4

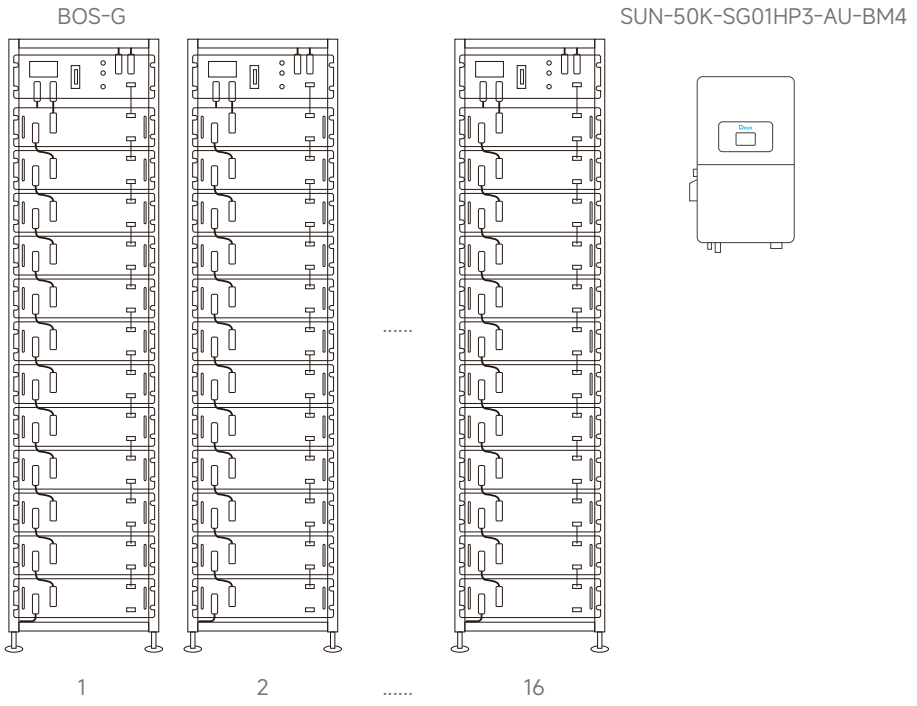

Maximum support for 16 racks of batteries in parallel

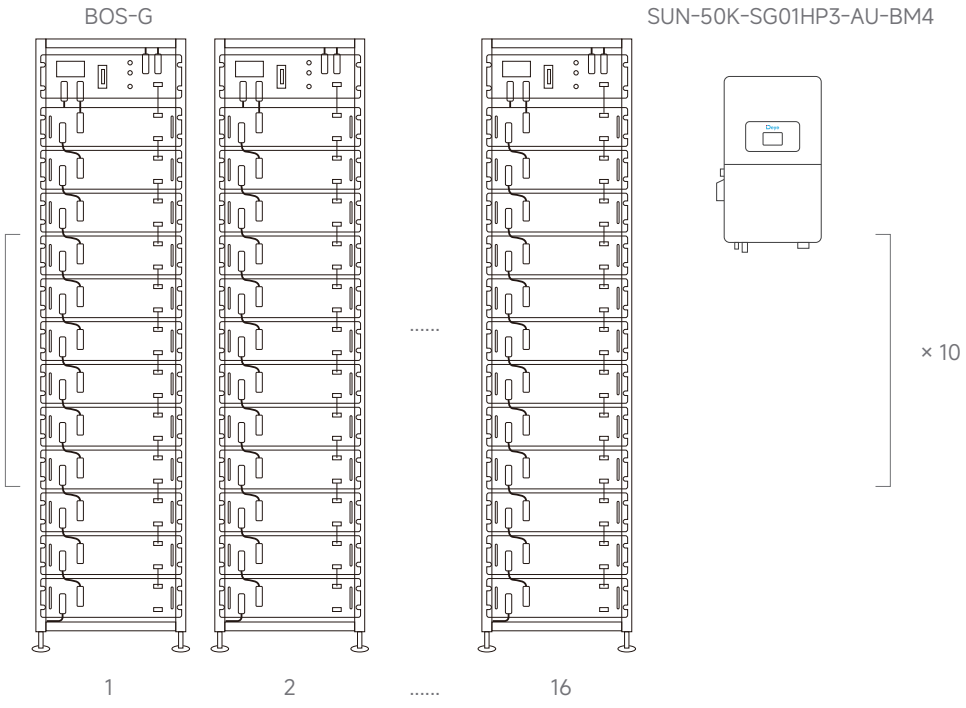



Maximum support for 10 inverters in AC parallel operation

Deye Cloud

All-in-one Energy & Device Management Platform

- Unlock Significant Savings
- Individual Add-On for Dynamic Tariff
- Intelligent Charging/Discharging Strategies
- Tailored Solution to Deye Devices
- Real-time Equipment Monitoring

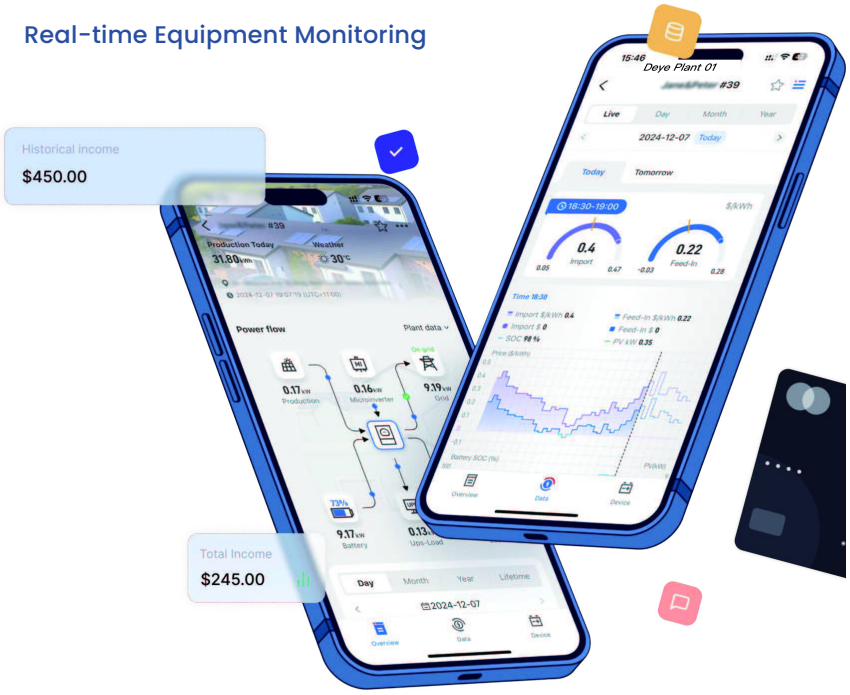

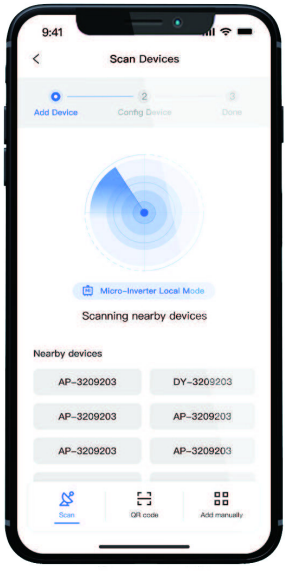

Smarten Up Your Home Energy

Download Deye Cloud APP to join us!

Embrace a seamless, effortless energy experience that's both eco-friendly and budget-friendly with our intelligent assistant

All in One

Smarter home energy and device management

Cloud-edge Collaboration

Faster and more efficient data processing

Accelerated Connectivity

Optimized for speed and performance

Advanced Smart Energy

A smarter way to manage your electricity bills

Deye

POWERING YOUR LIFE

www.deyeess.com / www.deyeinverter.com

Deye ESS / Deye New Energy