


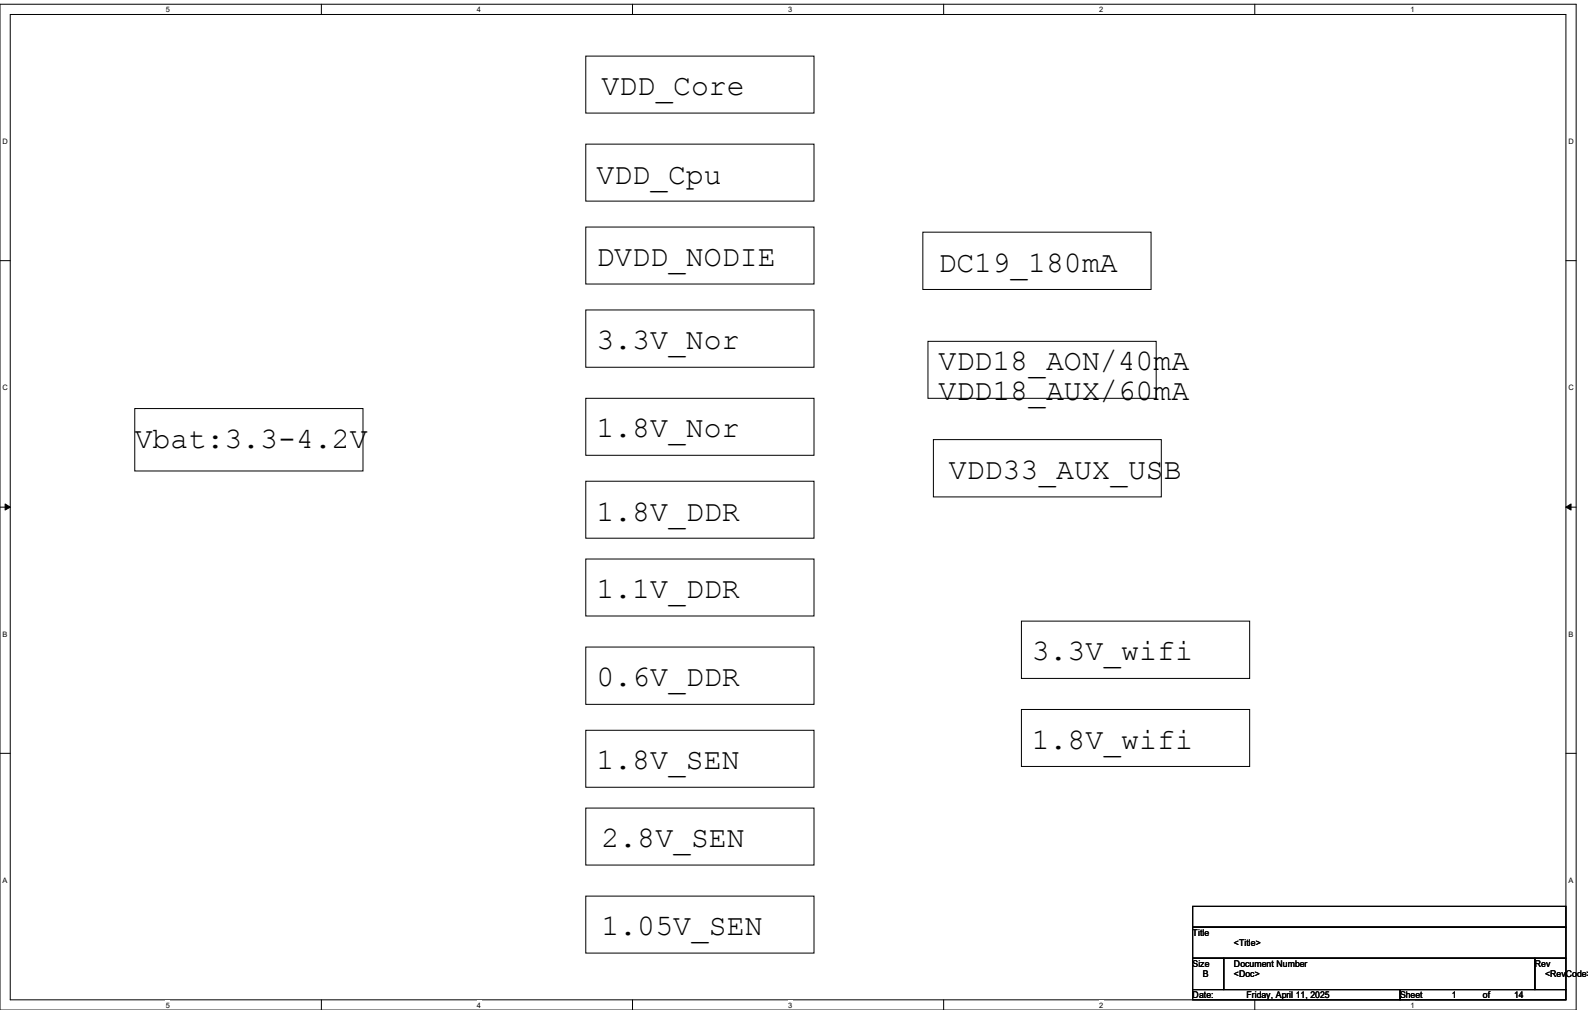


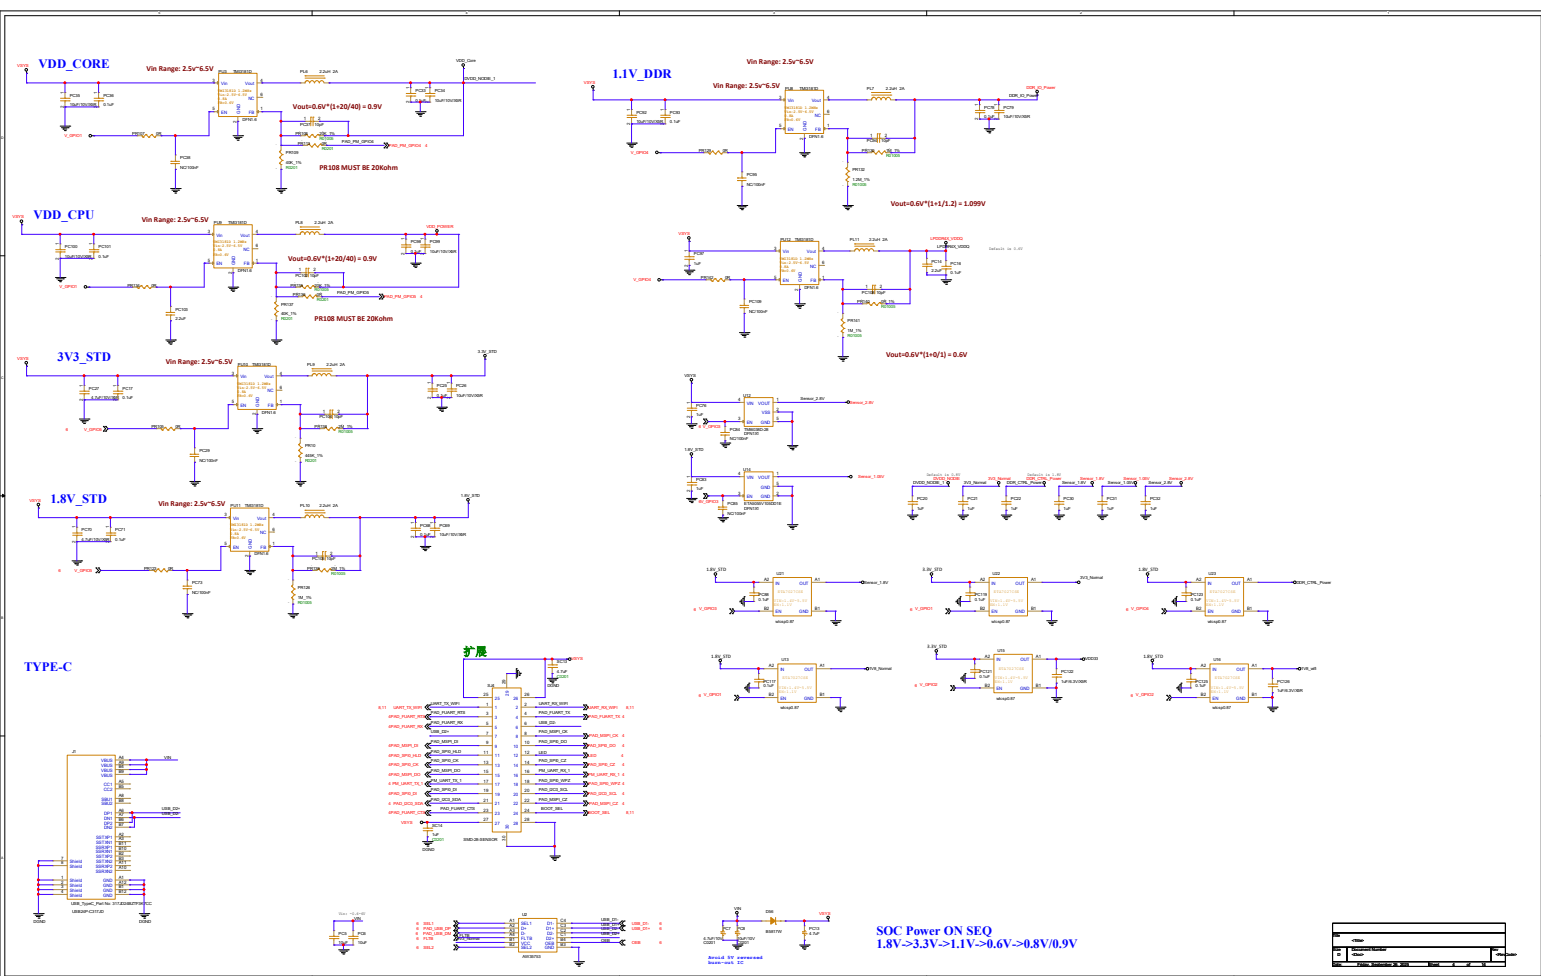


Revision			
REV	DESCRIPTION	DATE	APPROVED
01A	Init	2024/11/25	


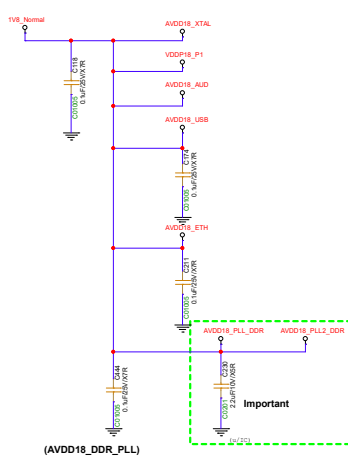


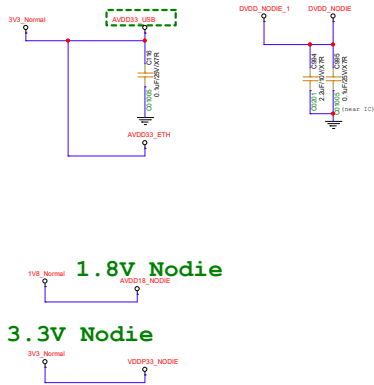


CPU Max: $1/0.9=1.1A$





Core Max: $2/0.9=2.2A$

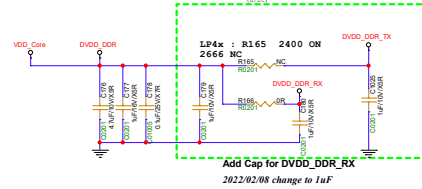


LPDDR4X

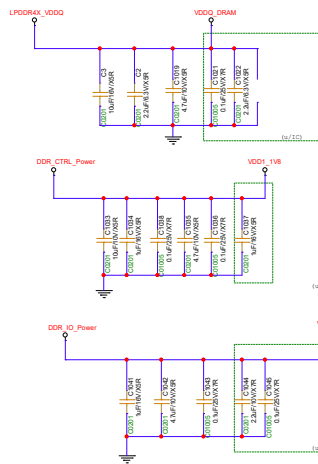

LPDDR4X




Rev		<Title>	Rev
Doc		Document Number	Rev
Date		Monday, September 22, 2025	Rev
Page		Monday, September 22, 2025	Rev

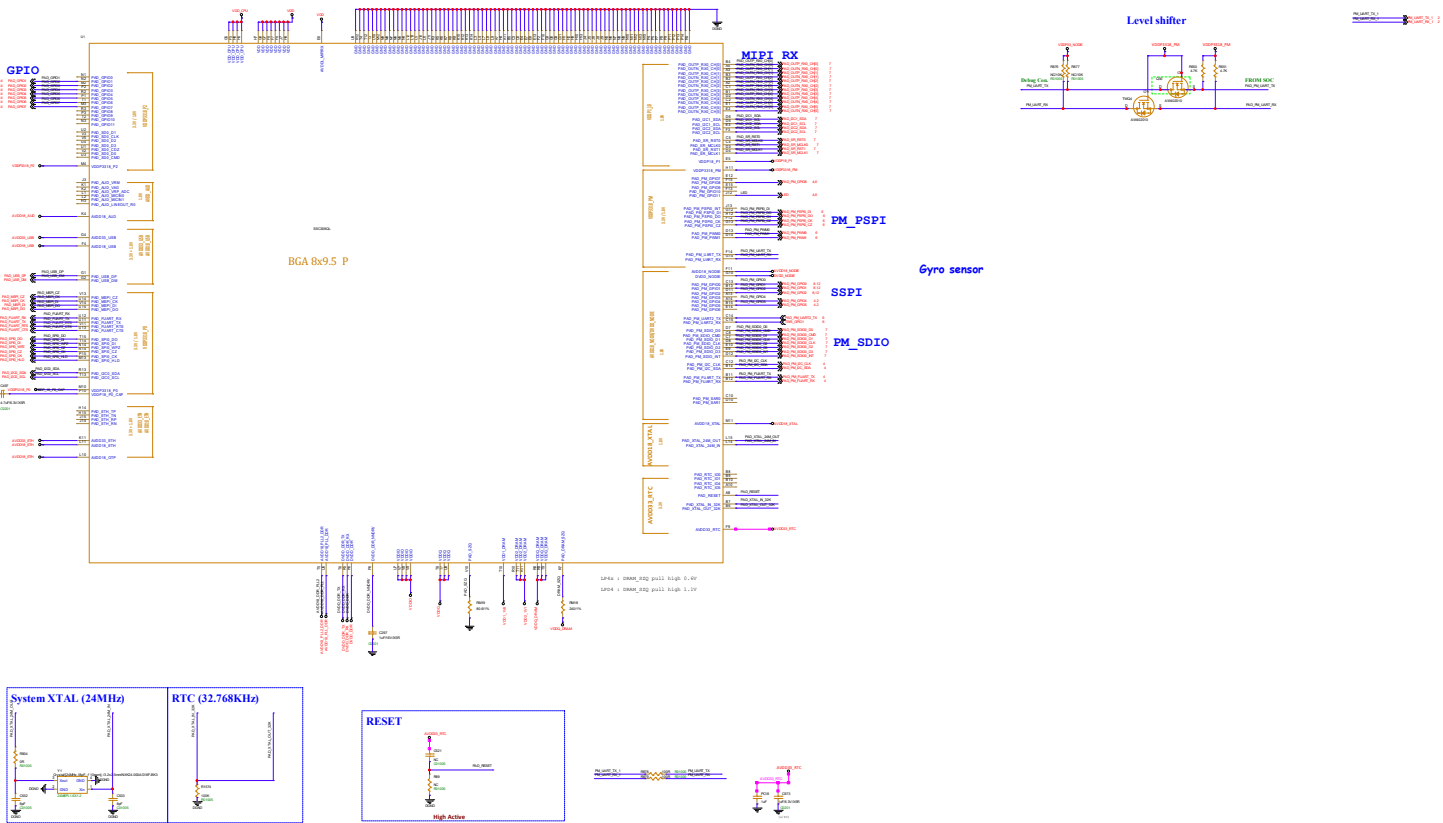

Boot Information (ROM - Boot Mode Selection)									
otp_boot_source_enable = 0 (HW boot strapping mode) (@146)					otp_boot_source_enable = 1 (OTP force mode) (@146)				
ROM boot up	PAD_SPI0_DI	PAD_SPI0_HLD	PAD_SPI0_DO	PAD_SPI0_CLK	otp_boot_source[7:0]	otp_emmc_boot_skip_sd	ROM Boot Storage Selection		
Path	M[U]	M[U]	M[U]	M[U]	(@119, per 4-bit OR-ed)	(@118, 32-bit OR-ed)			
(Default)	1	1	1	0	0000_0100	Don't care	SPI NAND Flash (w/ embedded ECC)		
Storage Mode		1	0	0	0000_0101	Don't care	Skip SD Card, run SPI NAND Flash		
(SD Boot first)		1	0	1	0000_0110	Don't care	SPI NOR Flash		
(or Skip SD)		1	1	1	0000_0111	Don't care	Skip SD Card, run SPI NOR Flash		
Non-NOR-NAND		0	0	0	0000_0000	Don't care	USB 2.0 Device		
Flash storage		0	0	1	0000_0001	Don't care	UART1		
FORCE UART	1		1	1	0000_0011	0: Check SD, 1: Skip SD	eMMC 4 bit		
Mode	0						not enter force UART boot		
							FORCE UART boot		

BOOT STRAPPING




TWS
WQ7036AX




```
TWP1\TWP2\TWP5 LAYOUt close
TWP3\TWP4 LAYOUT close
TPW6/TPW7 CLOSE
```

Others



Light Sensor

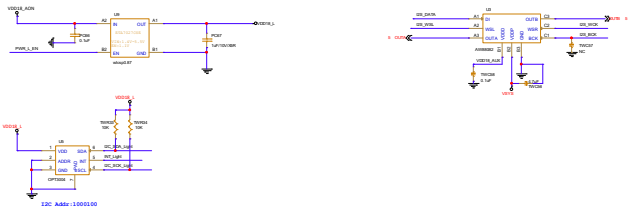

DMIC

DMIC_4CH/2CH

