



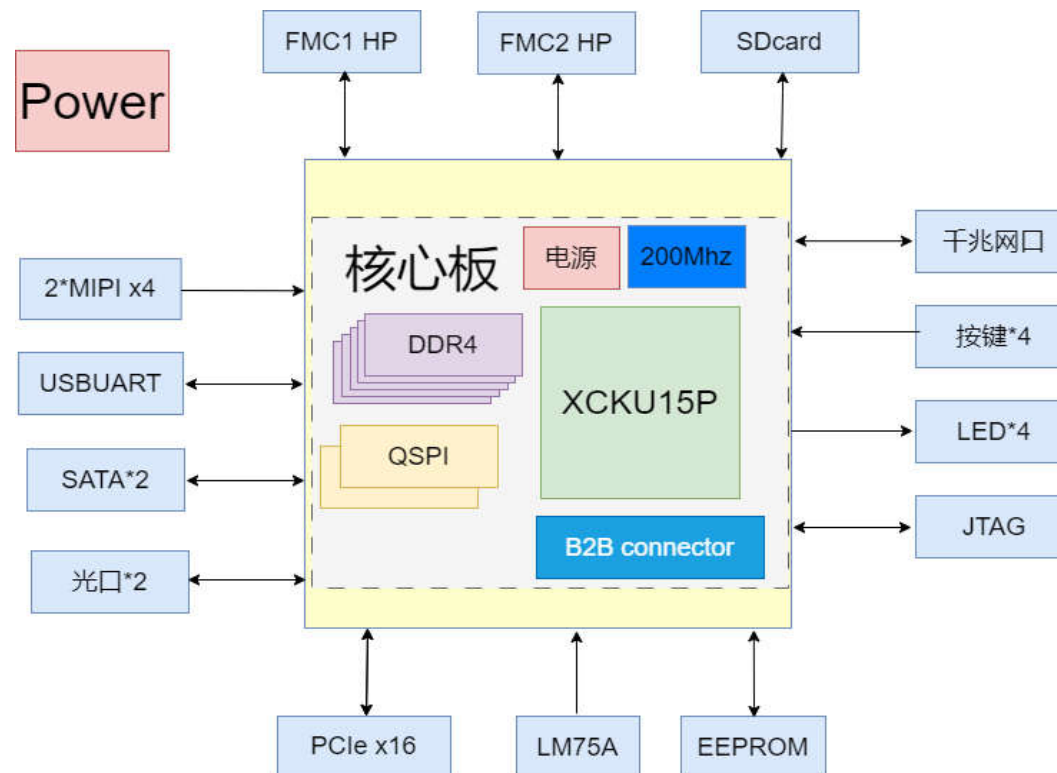
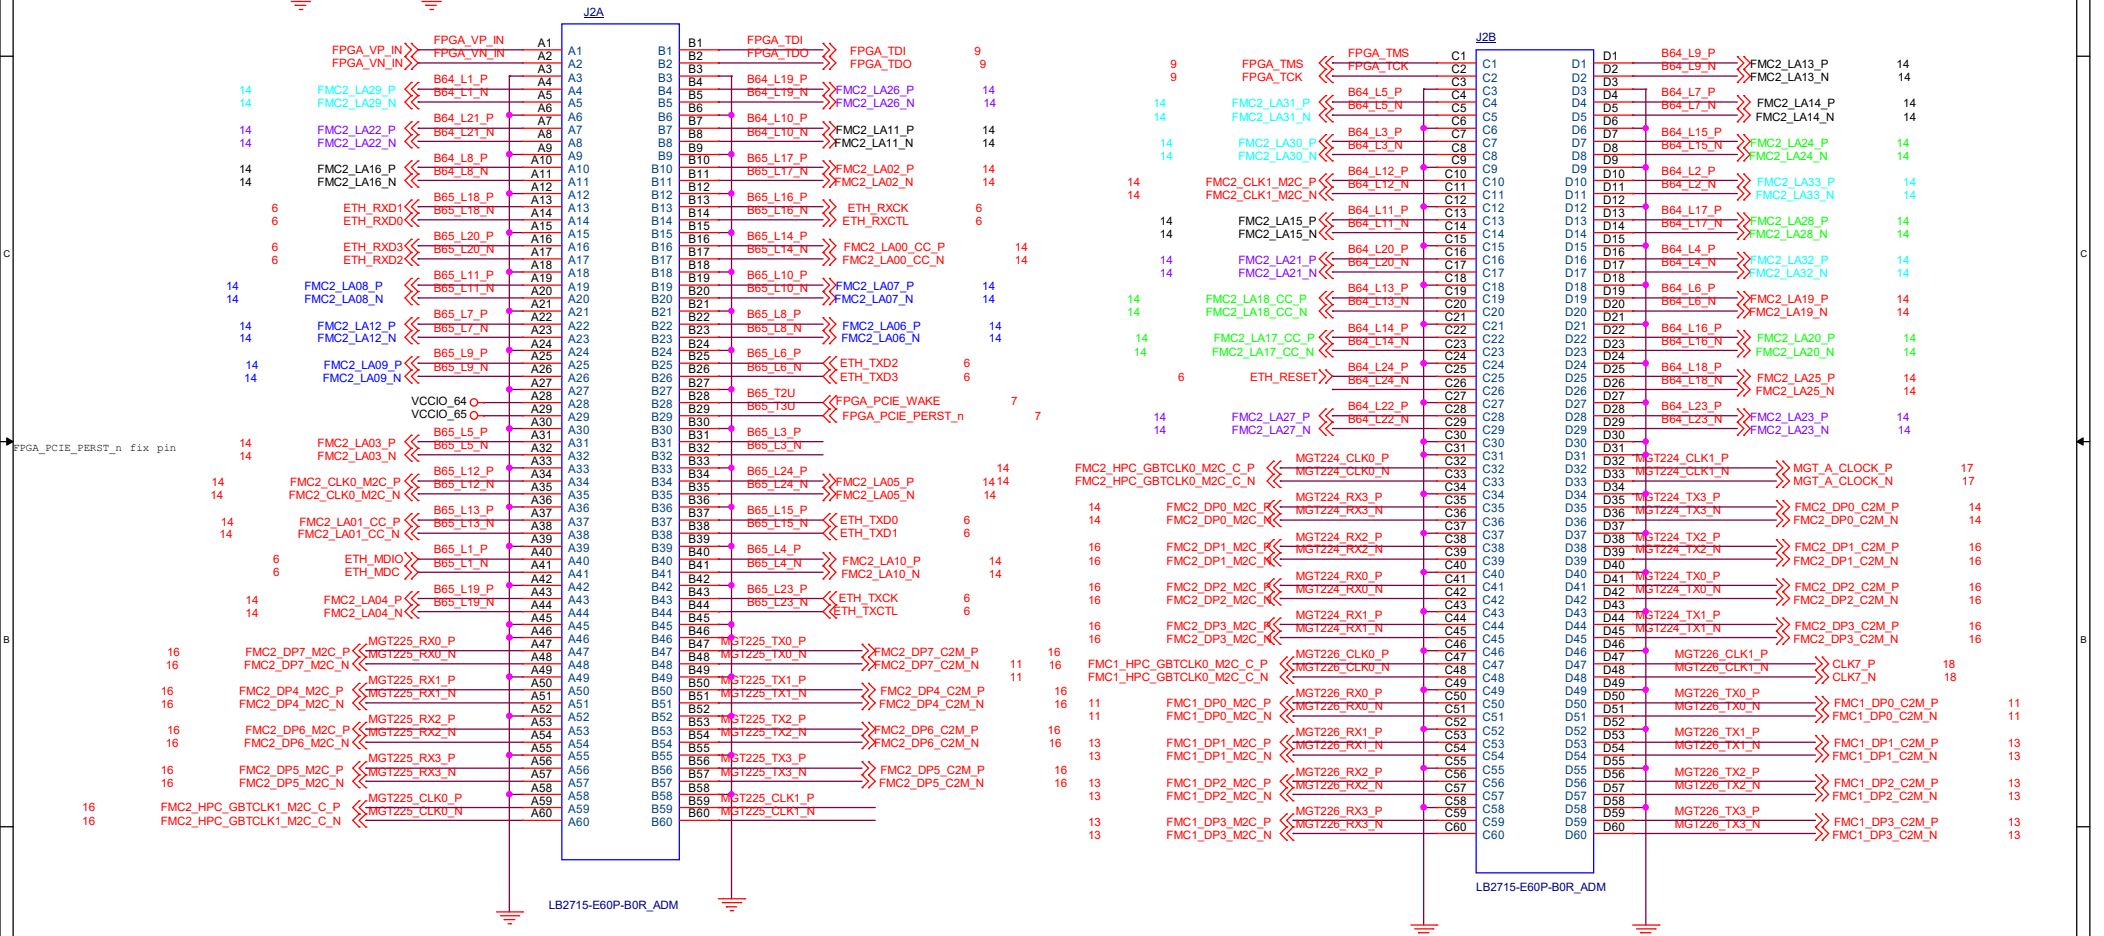







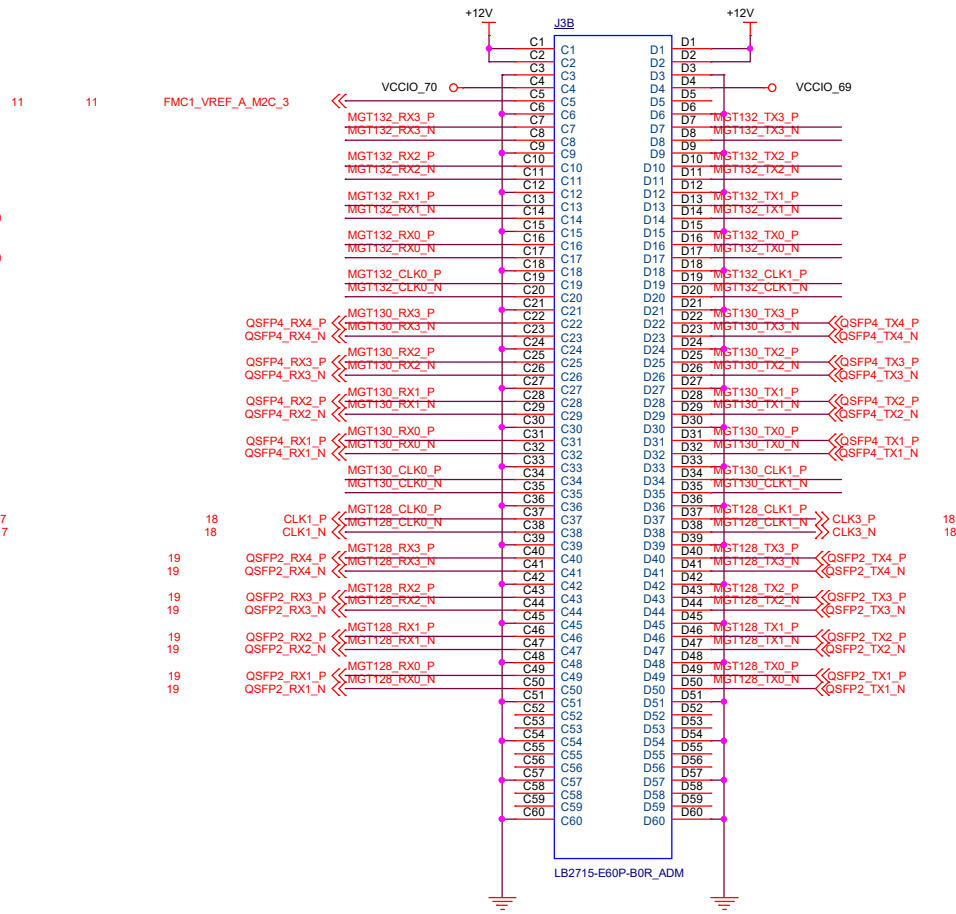





KU11P has no bank132

ALINX Confidential


ALINX Http://www.alinx.com.cn	
Title: PAGE04 Board Connector	
Size: Custom	Document Number: AXKU15扩展板 Schematics
Date: Friday, November 24, 2023	Sheet: 4 of 22
Rev: 1.0	

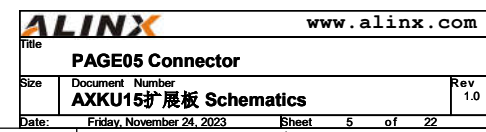

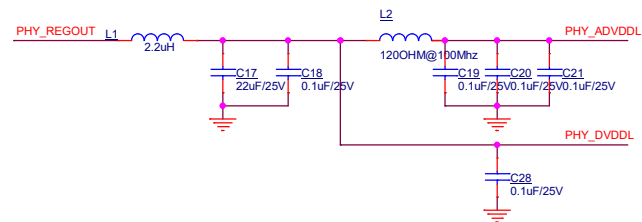


```
V_SEL=10: RGMII IO Voltage is 3.3V
```


Ethernet Port

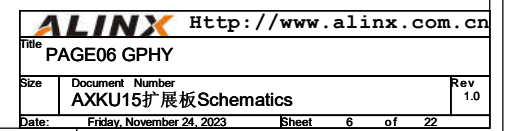


PCIE X16

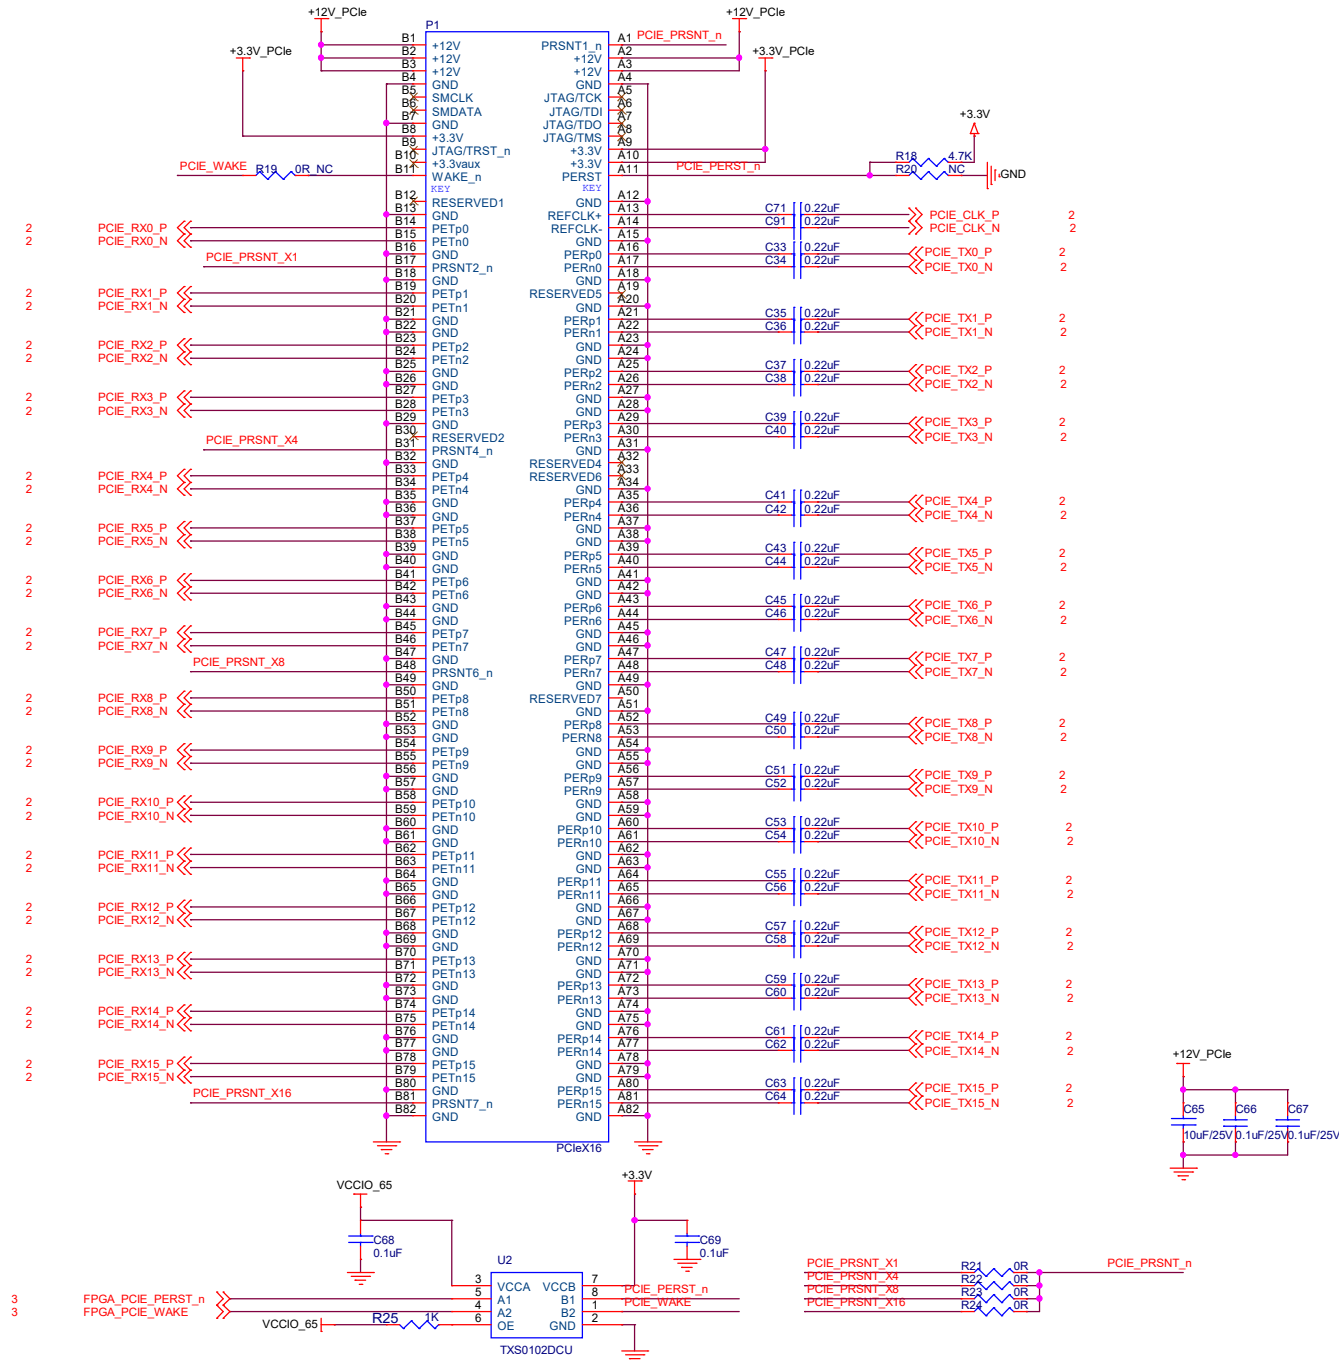


Digital Temperature Sensor

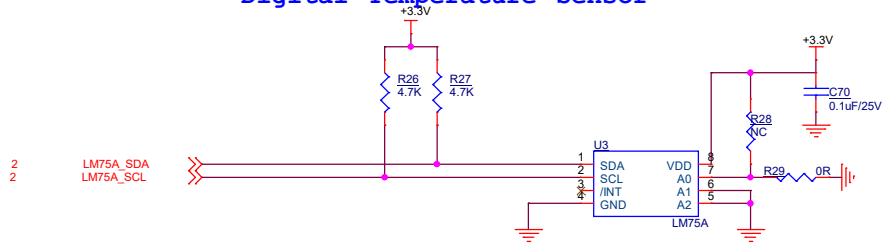

EEPROM





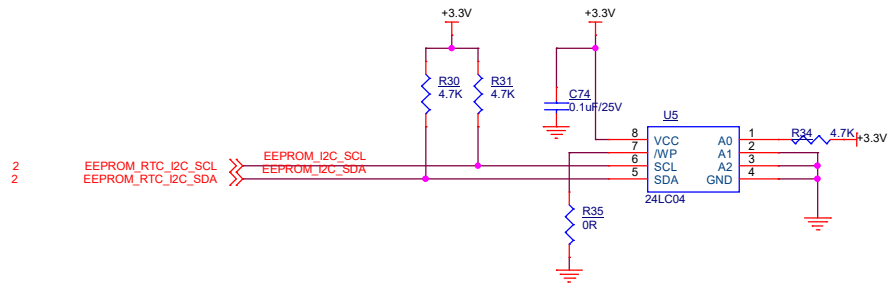


SD Card Connector






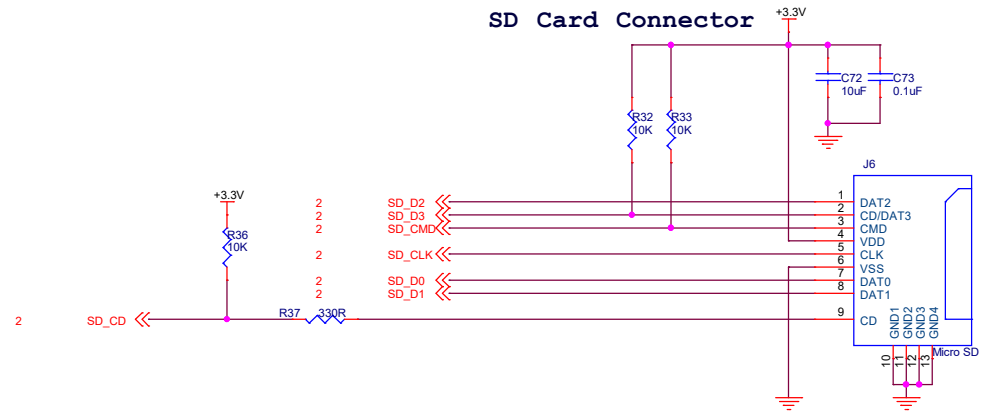


JTAG Connector


JTAG support 1.8V

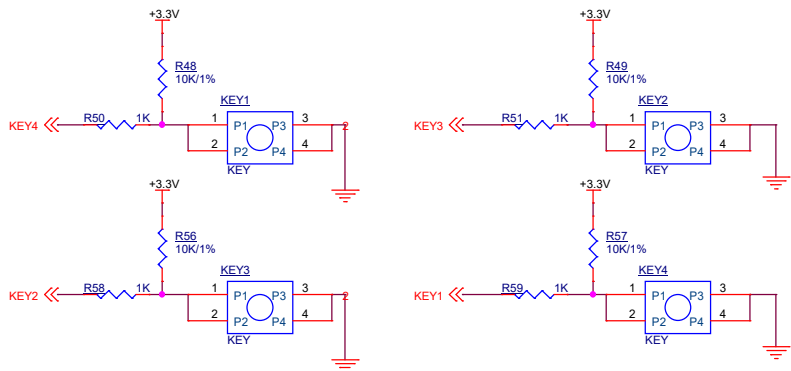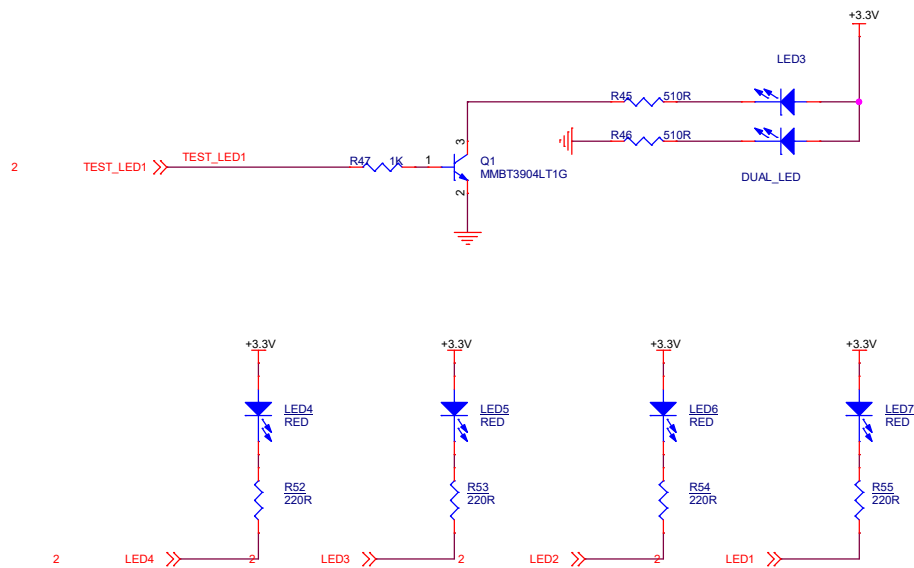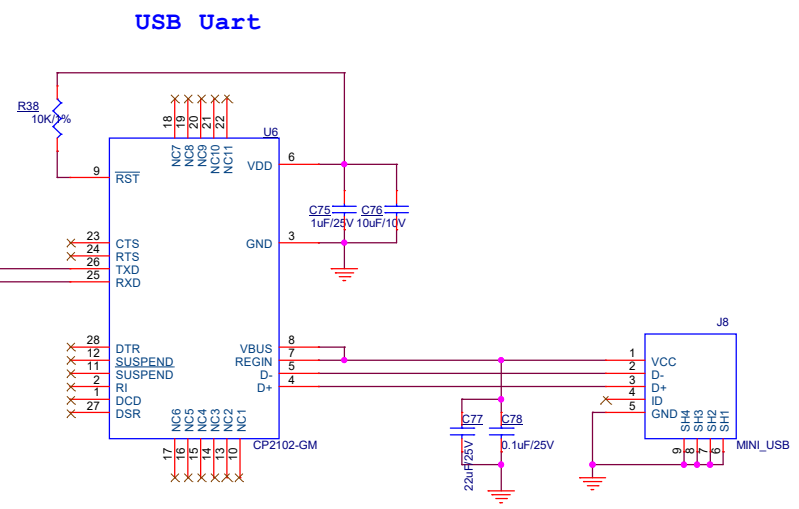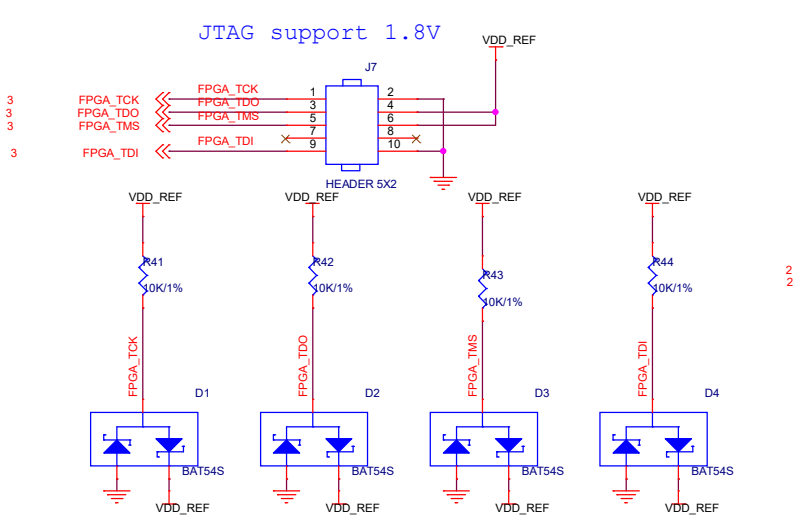



ALINX Confidential

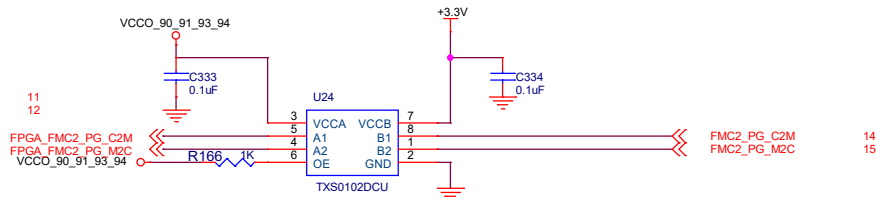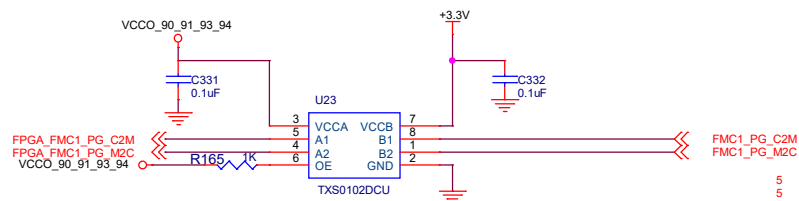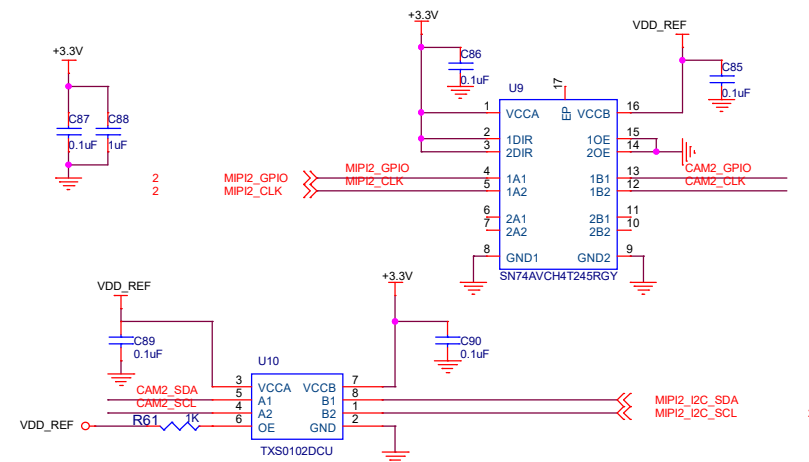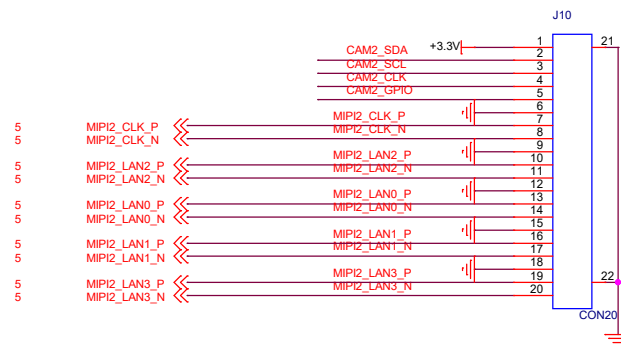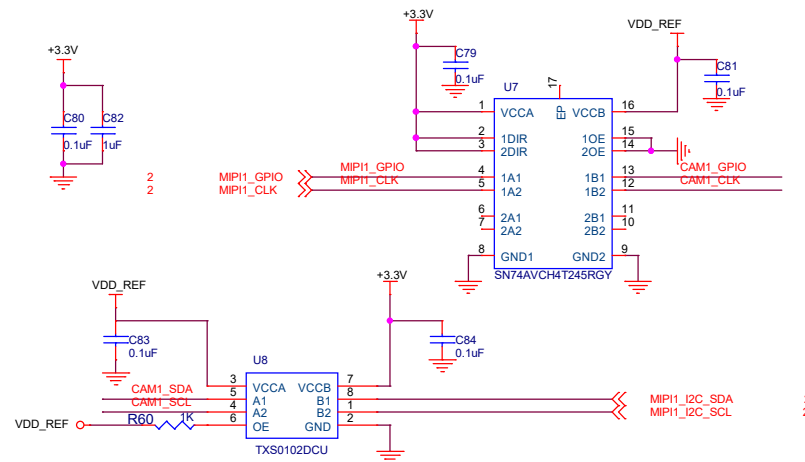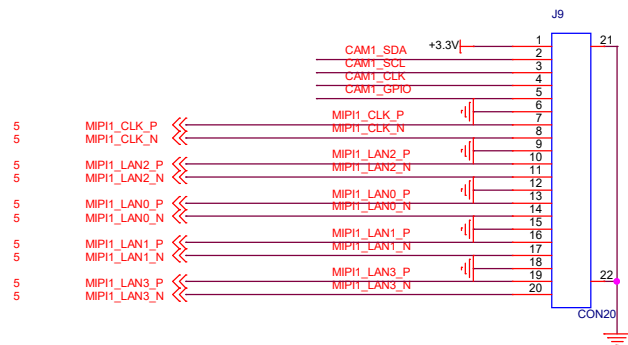



SN74AVCH2T45DCUR 74AVC1T45GW

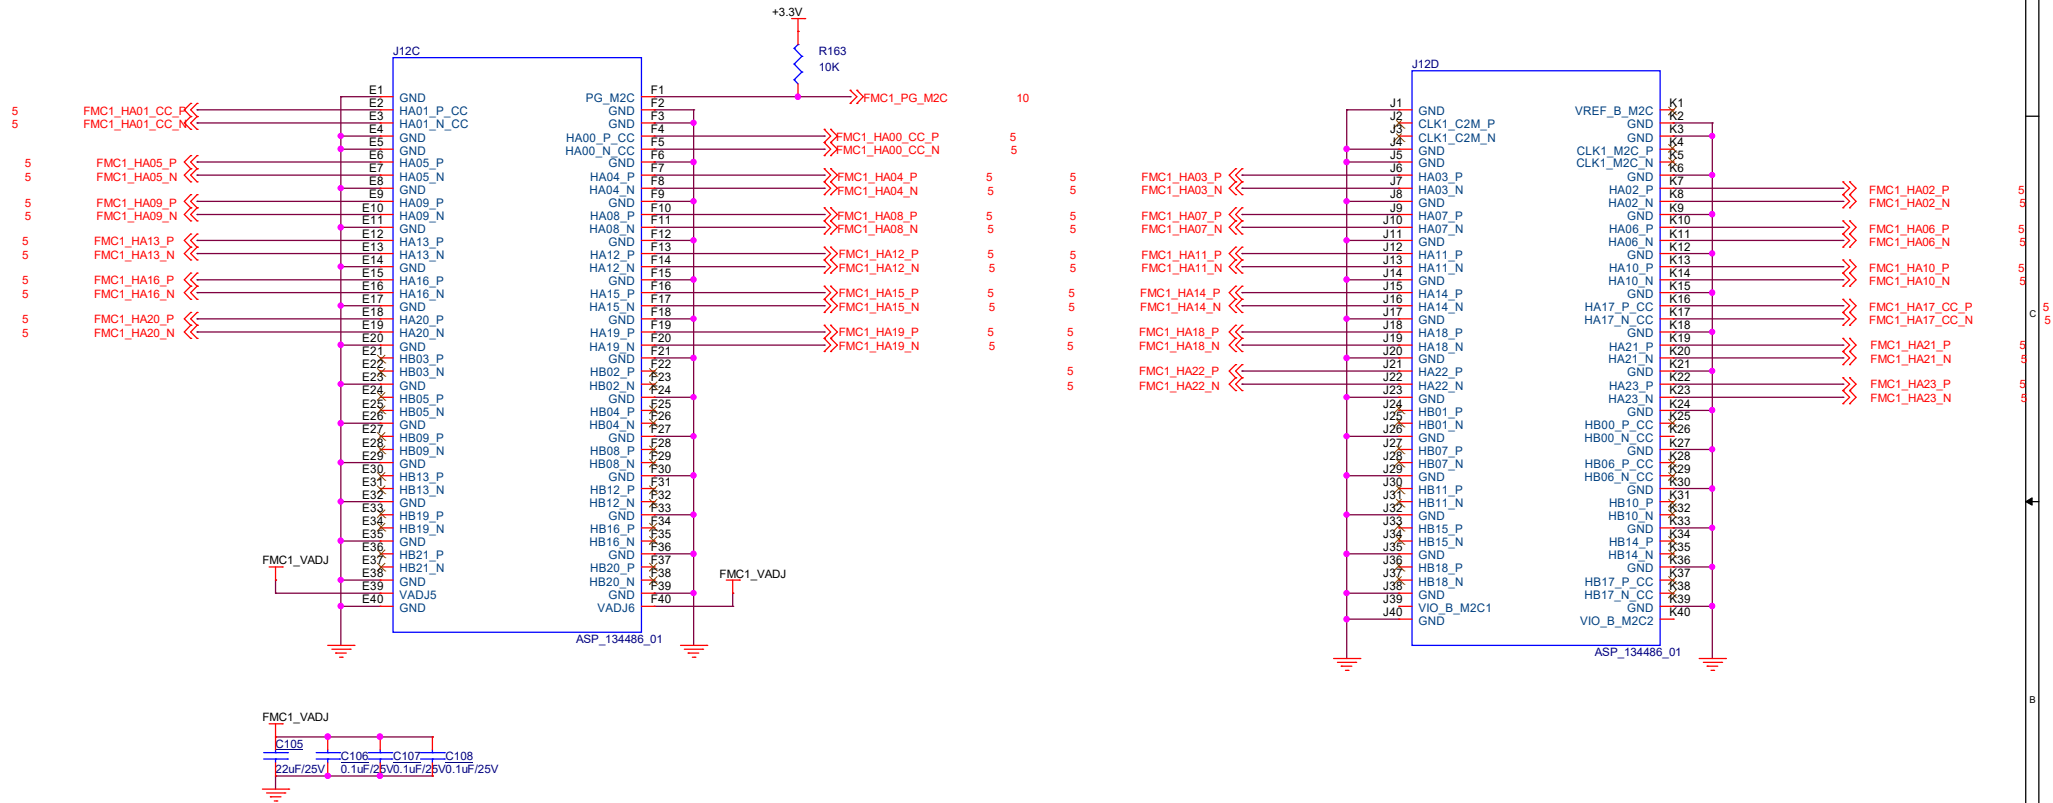

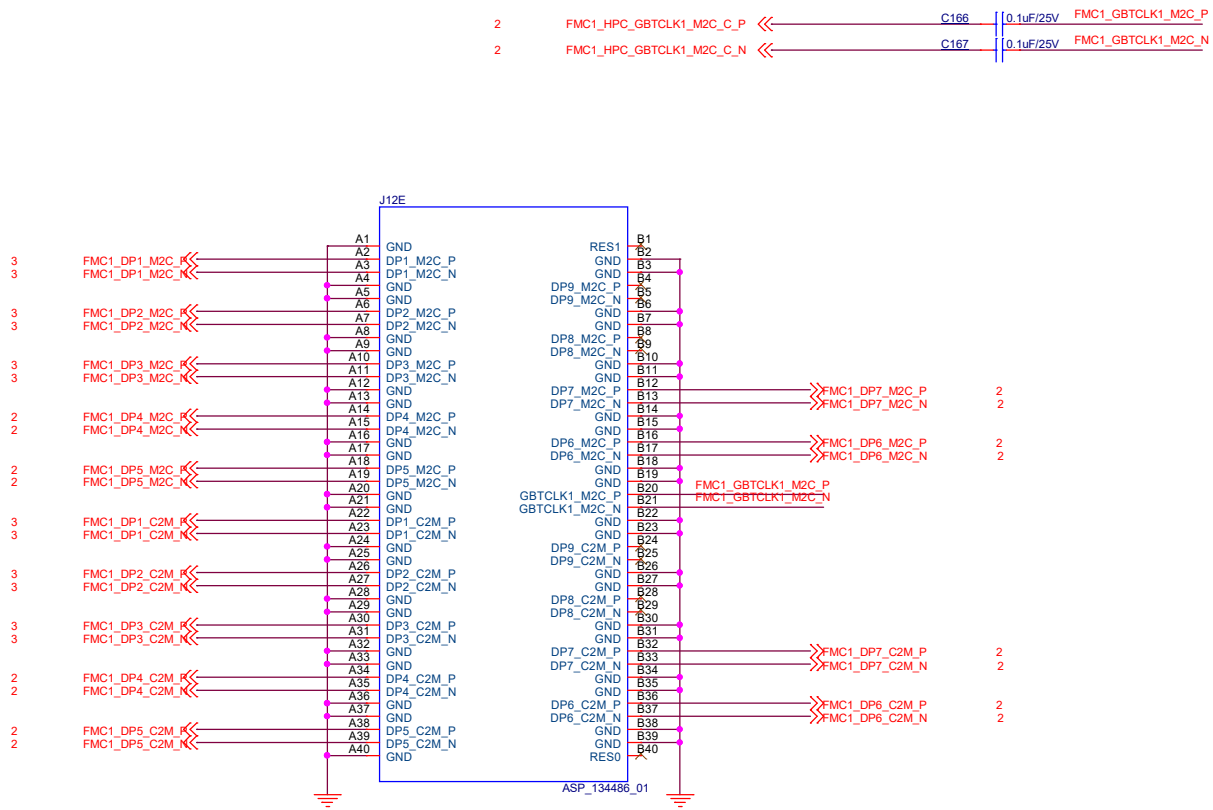


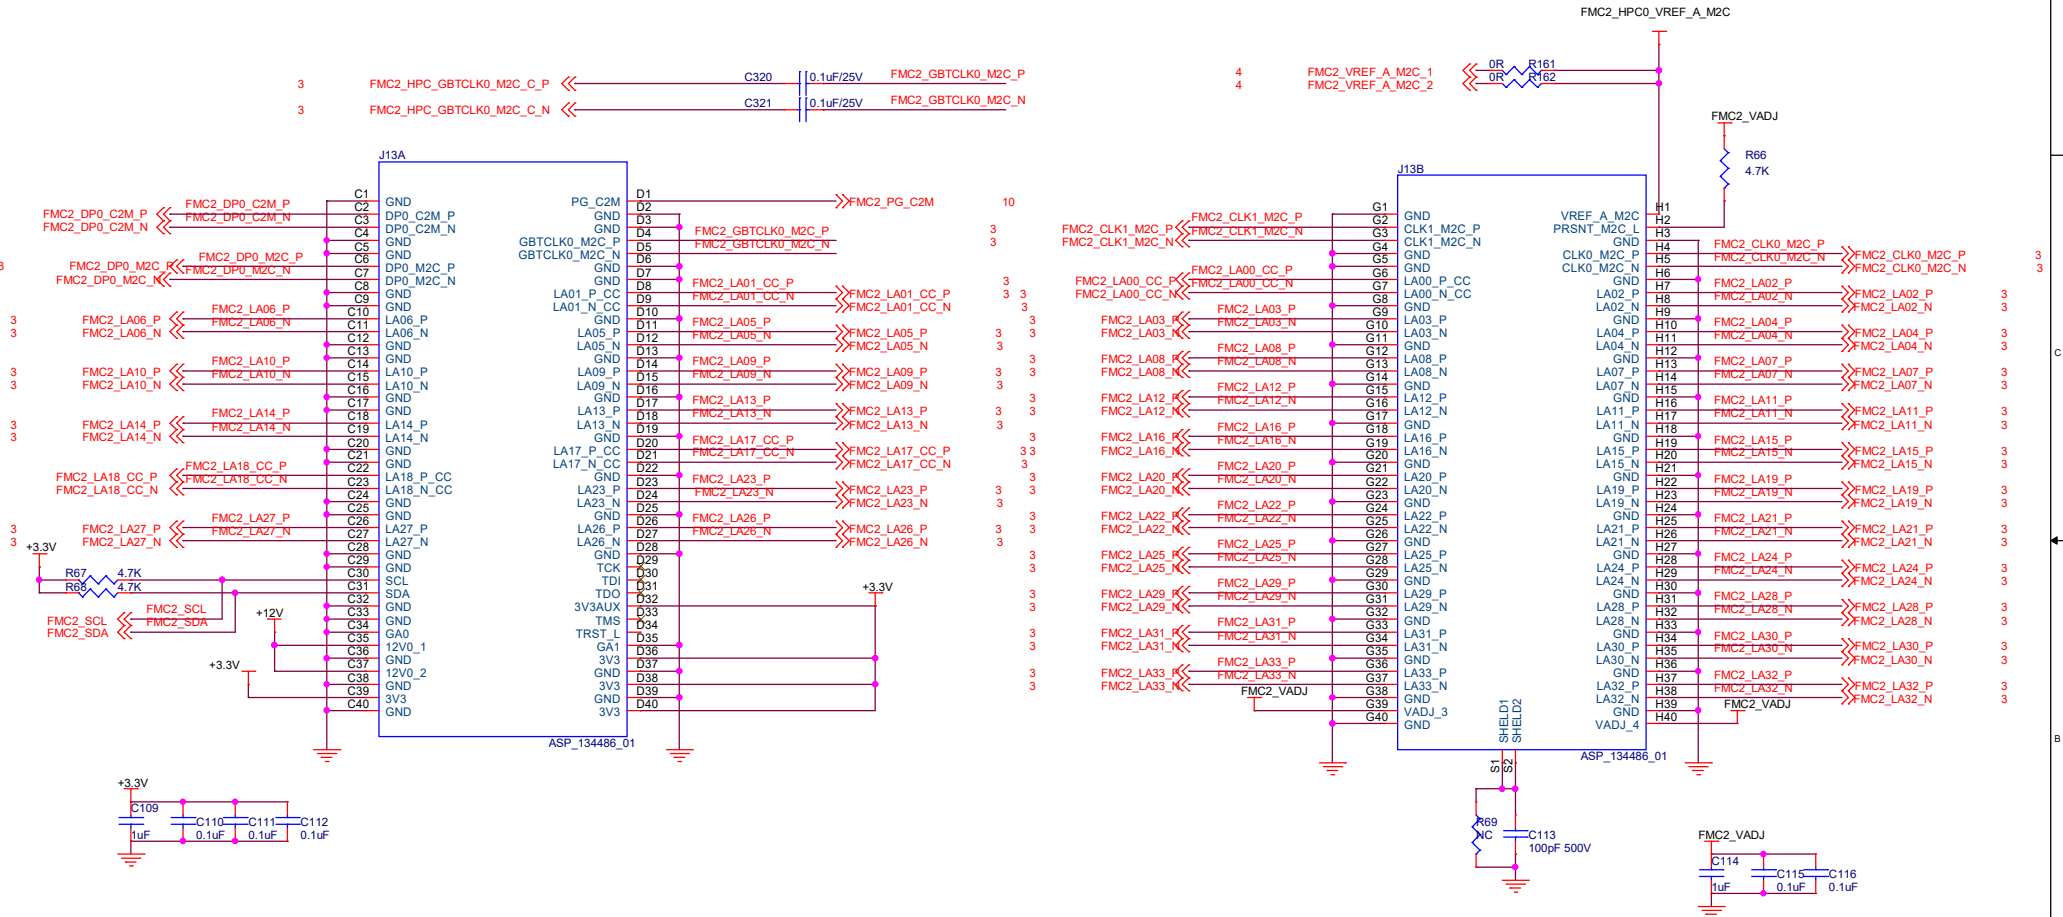

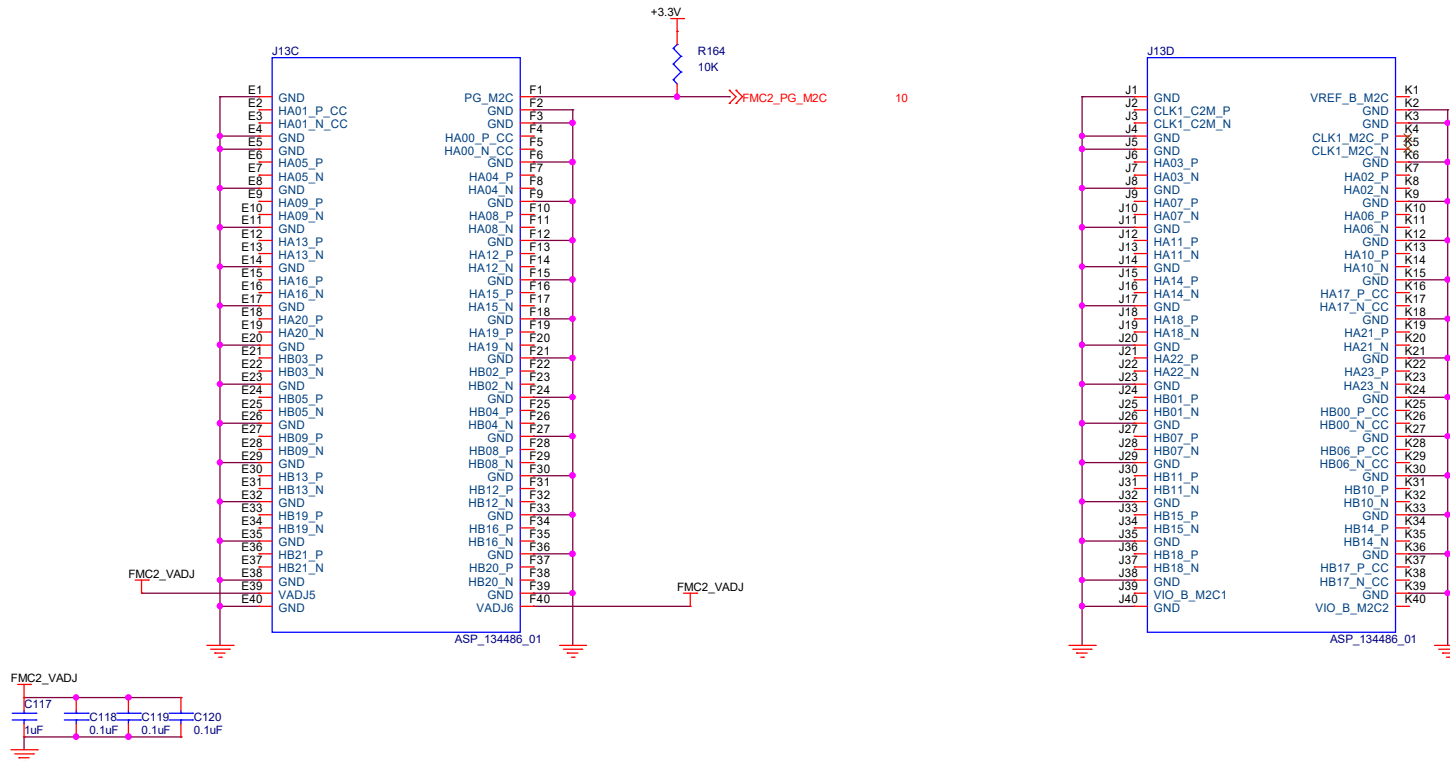


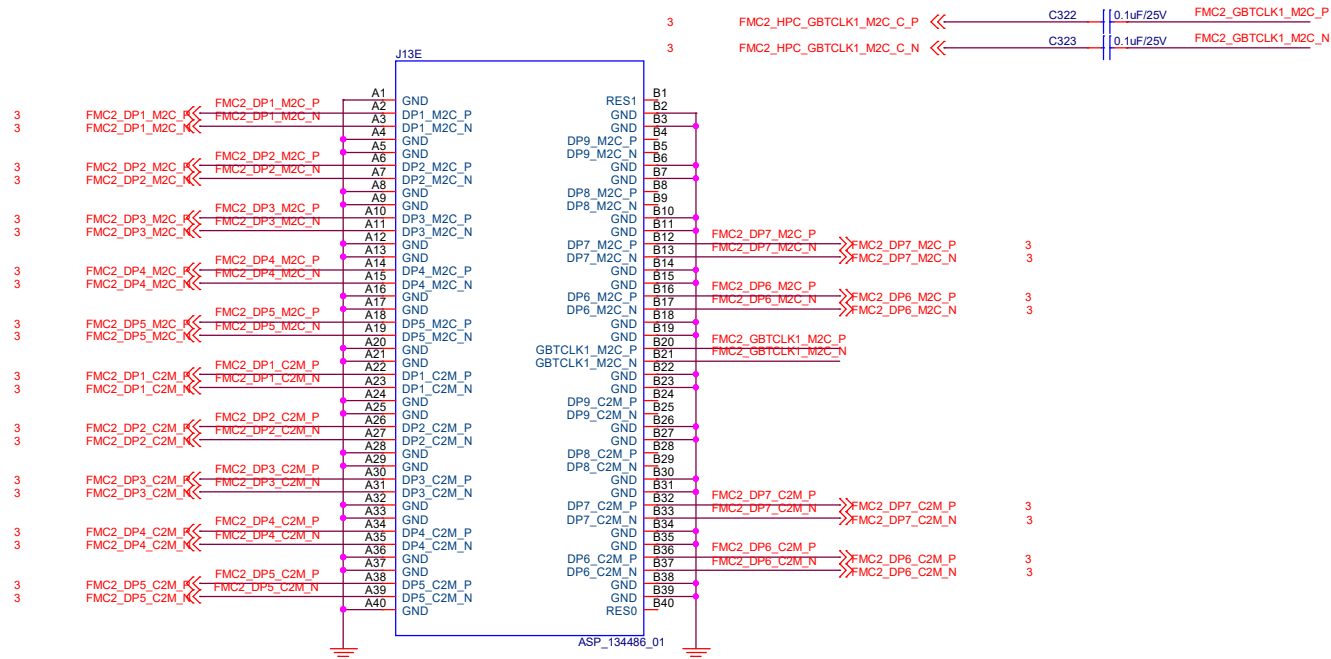


156.25MHz GTY

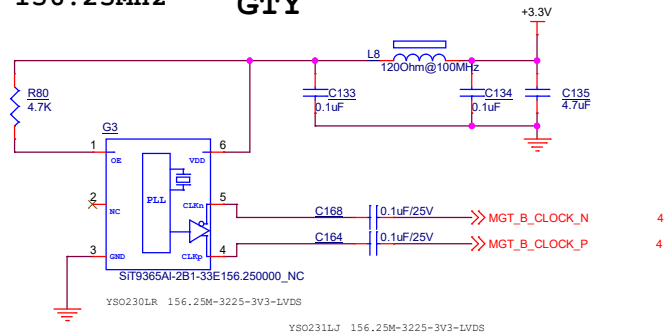


156.25MHz

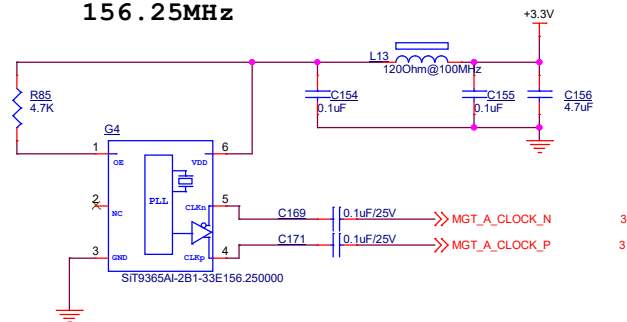


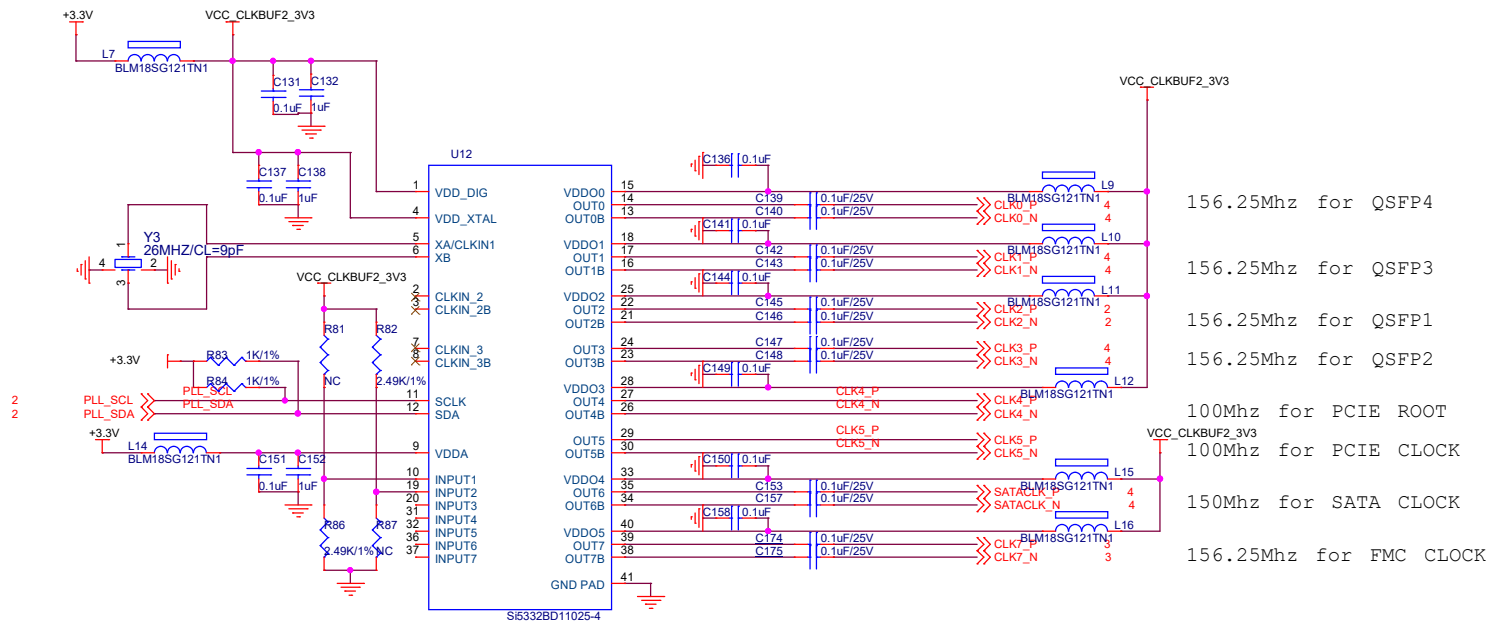


QSFP 1

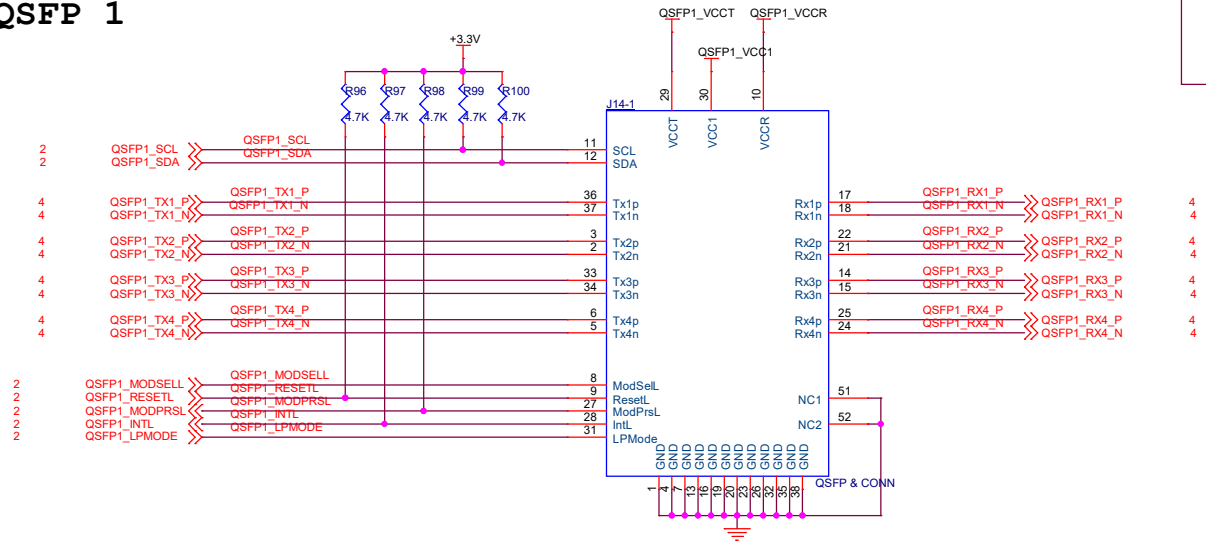


QSFP 2

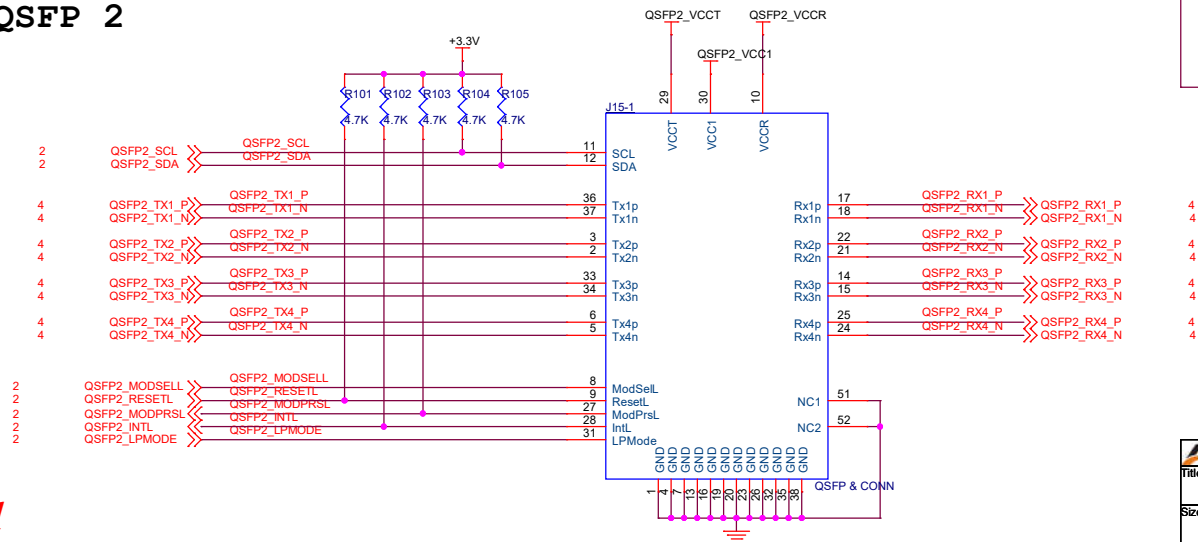


SATA POWER

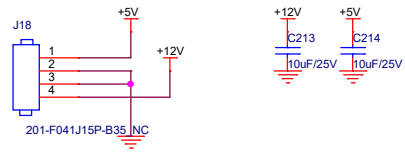


SATA1

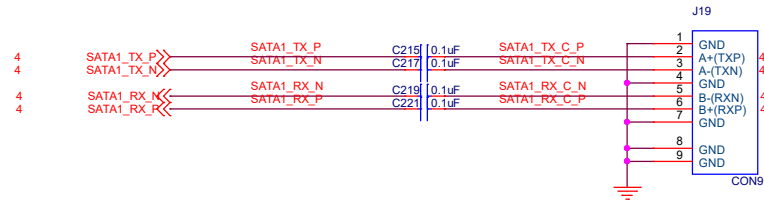


SATA2

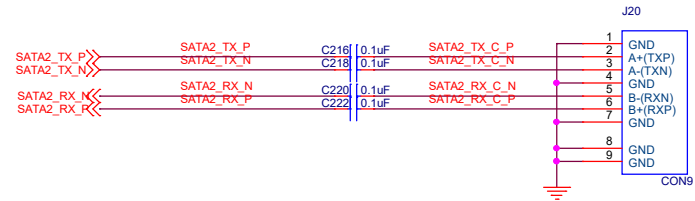

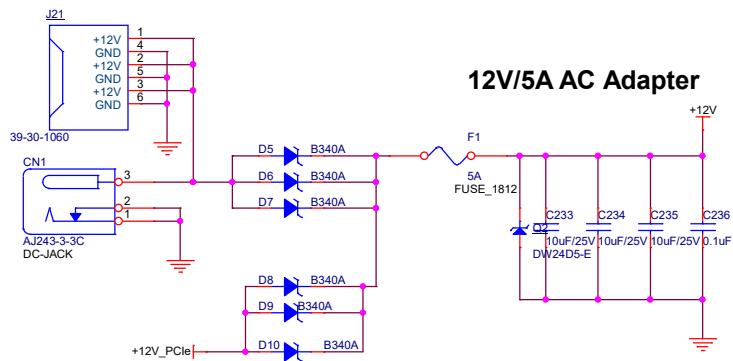


12V/5A AC Adapter

+5V POWER 6A

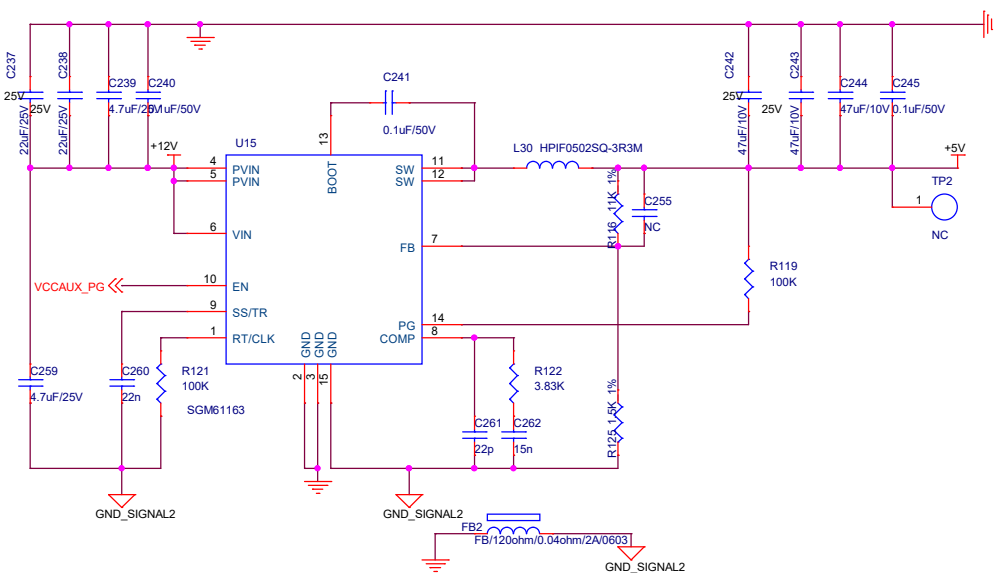


$$V_{out} = 0.6 \times (1 + R1/R2)$$



+3.3V POWER 6A

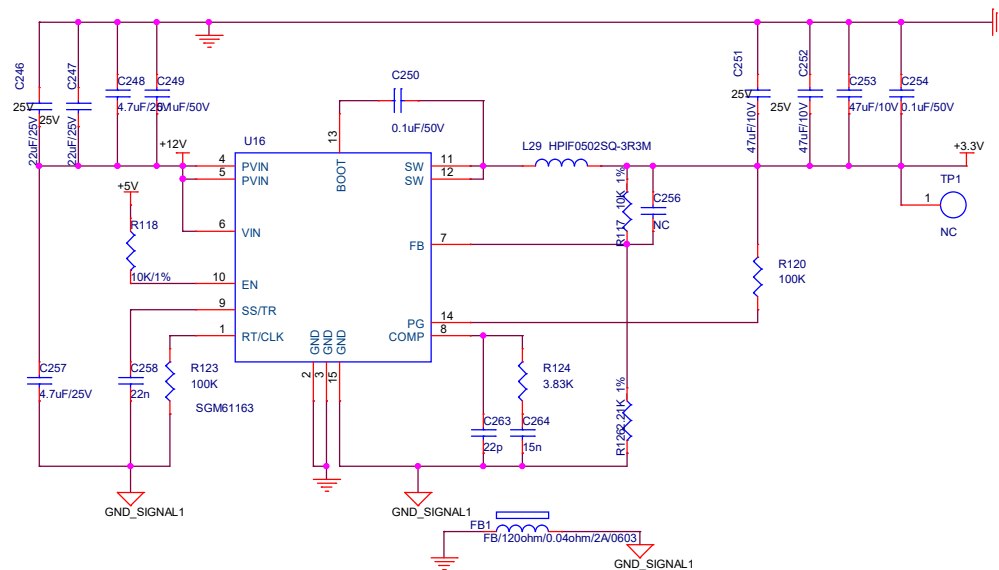


$$V_{out} = 0.6 \times (1 + R1/R2)$$

FAN

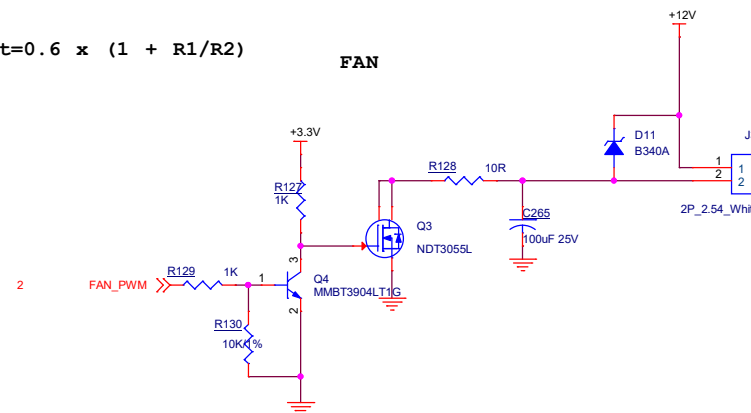


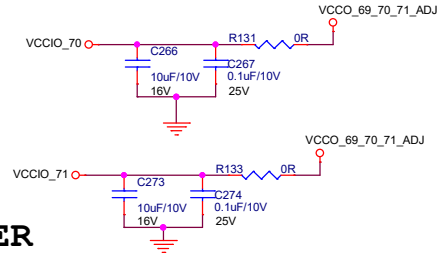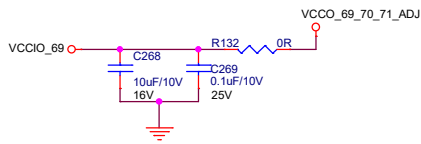


default: +1.8V POWER

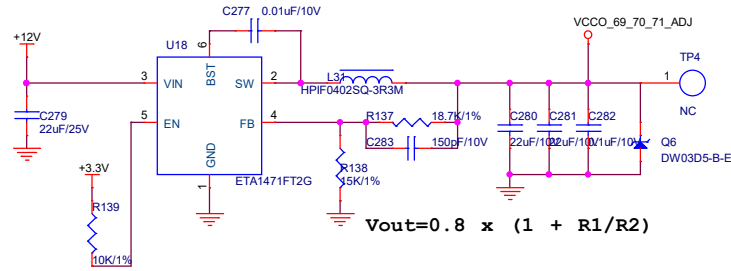


$$V_{out}=0.8 \times (1 + R1/R2)$$

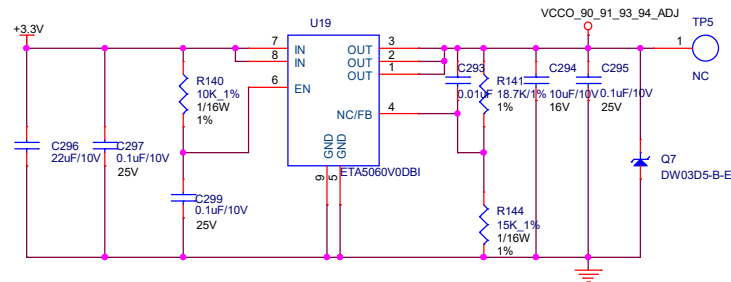



VCCIO_90_91_93_94:default: +3.3V




default: +1.8V POWER

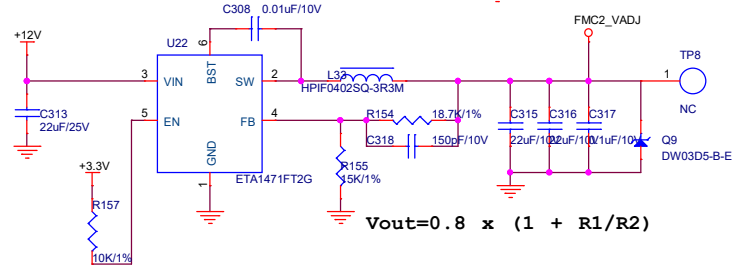

$$V_{out}=0.8 \times (1 + R1/R2)$$

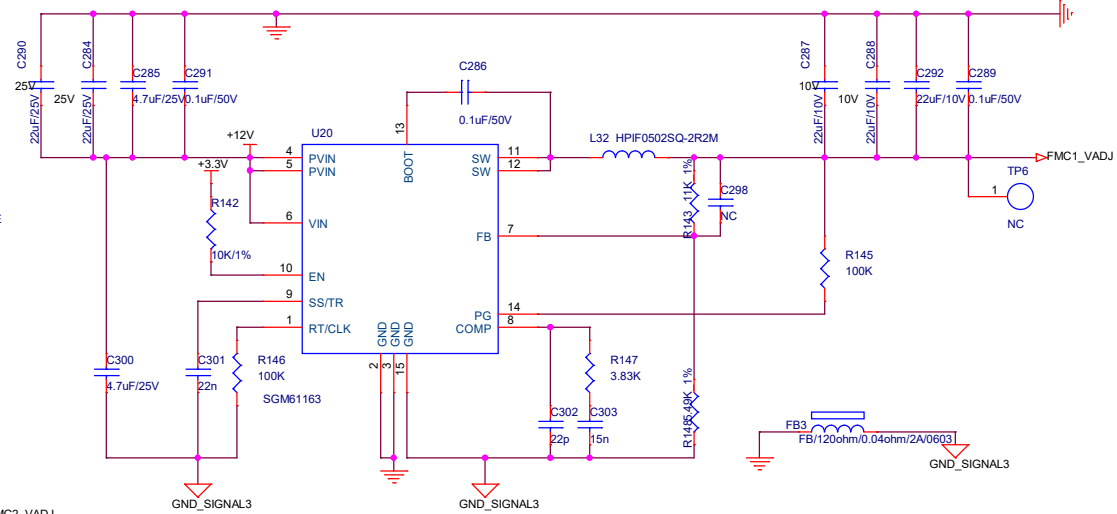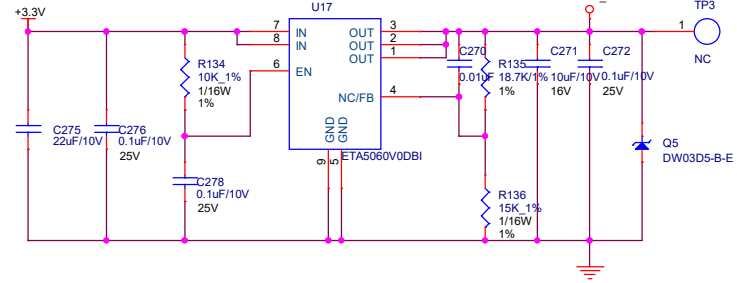

+1.8V POWER

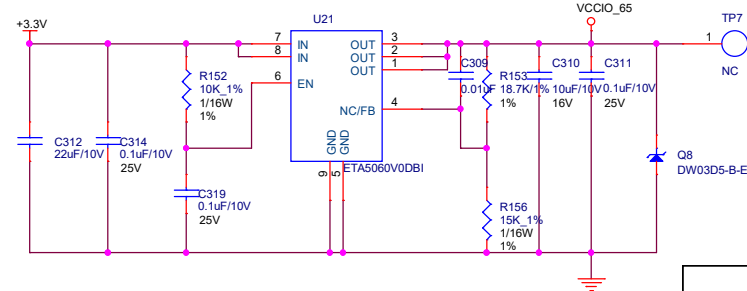

$$V_{out}=0.6 \times (1 + R1/R2)$$

Title			
PAGE22 Power			
Size	Document Number		Rev
	AXKU15扩展板Schematics		1.0
Date:	Friday, November 24, 2023		Sheet
	22		of 22