
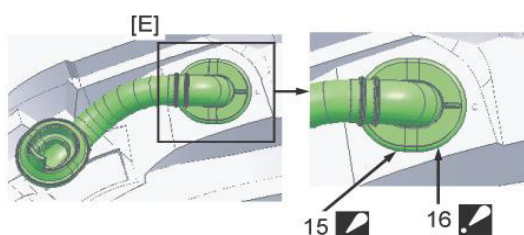
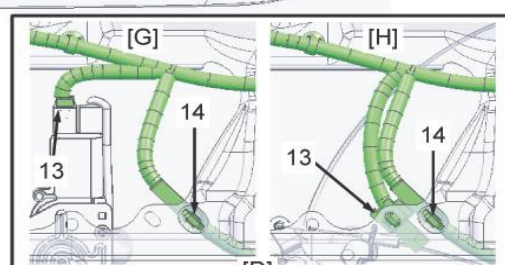





Reassembling Note for Wiring Harness

1/1

Around Rear End Door

Rear end door harness

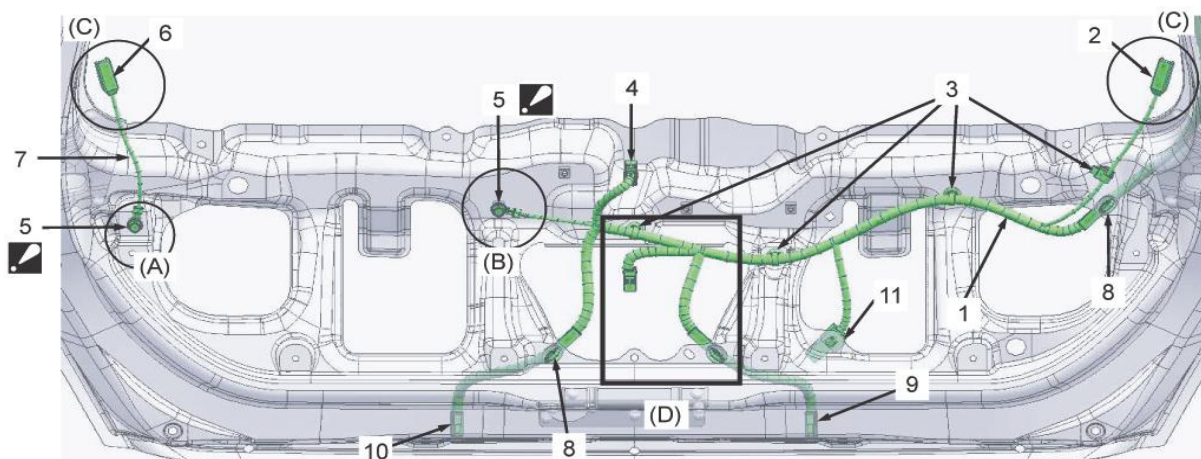

[A]: Detail (A)	6. Rear defogger (-)
[B]: Detail (B)	7. Rear defogger wire (-)
[C]: Detail (C)	8. Clamp
[D]: Detail (D)	9. License lamp
[E]: Door side	10. License lamp
[F]: Body side	11. Rear-end-door-opener and request-switch
[G]: Electric latch	12. Avoid that harness is pinched between rear end door trim and rear end door panel.
[H]: Manual latch	13. Rear end door switch and solenoid
1. Rear end door harness	14. Clamp
2. Rear defogger (+)	15. Set the grommet firmly.
3. Clamp	16. Match the rib of grommet to the boss on body panel, and fix it.
4. Rear wiper	17. Set the grommet firmly.
5. Ground bolt Confirm that the earth terminals do not move after tightening bolts.	18. Match the rib of grommet to the boss on body panel, and fix it.
"a". $\pm 45^\circ$	