
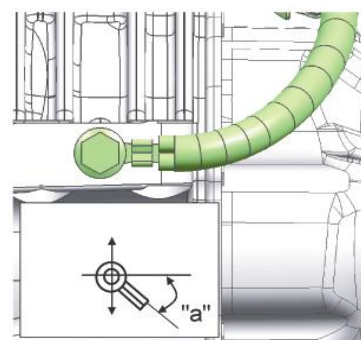
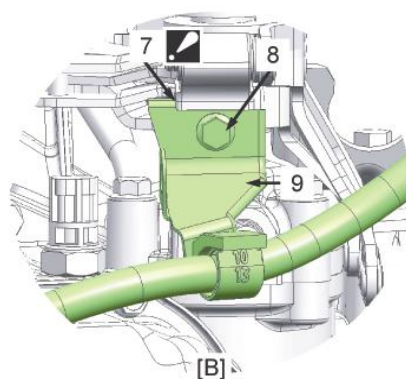
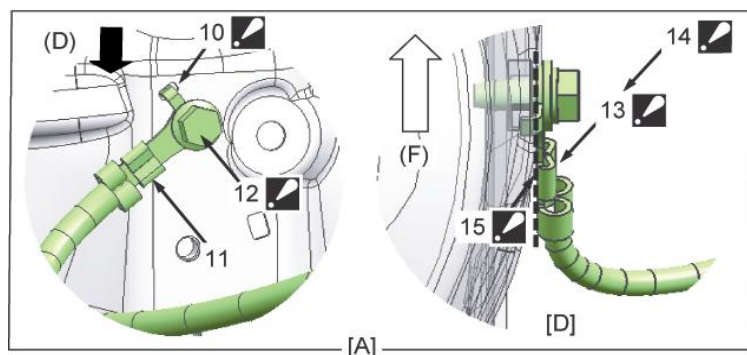
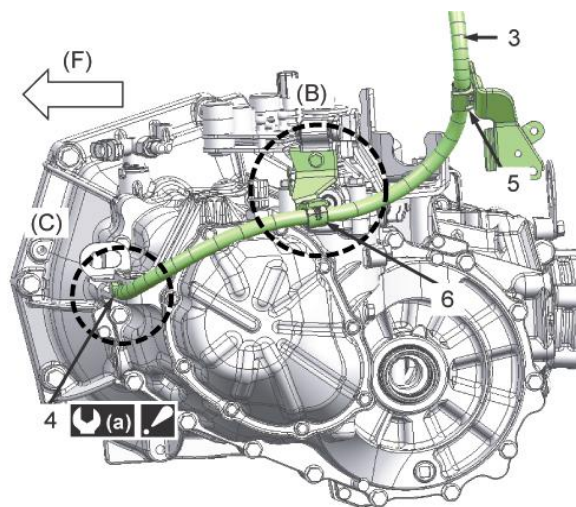


Reassembling Note for Wiring Harness

1/2

Around Battery

Battery cable (M/T 4WD model)

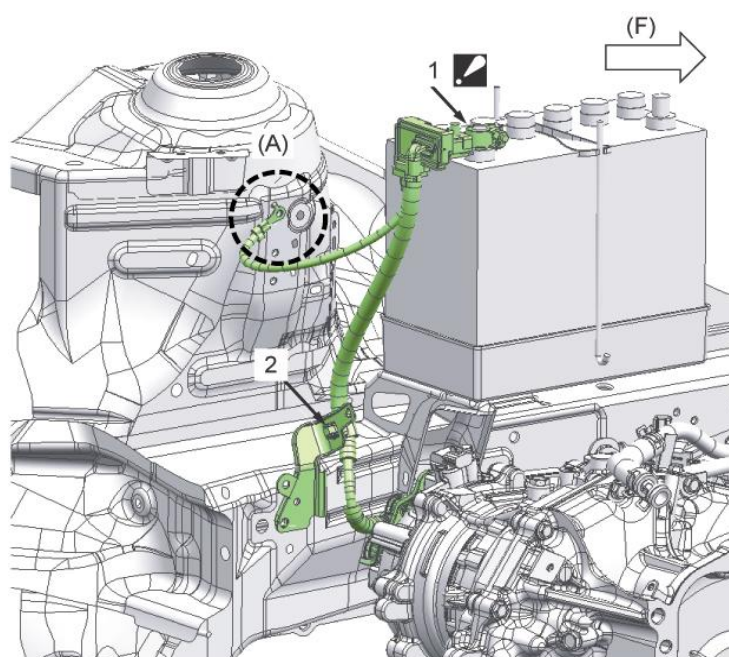

[C]

[A]: Detail (A)	6. Clamp
[B]: Detail (B)	7. Fit the stopper to the case.
[C]: Detail (C)	8. Battery ground bracket bolt
[D]: View (D)	9. Battery ground bracket
1. Battery (-) Confirm that the earth terminals do not move after tightening bolts.	10. Set the nail into the body hole.
2. Clamp	11. Body ground
3. Battery ground cable	12. Battery ground bolt Confirm that the earth terminals do not move after tightening bolts.
4. Battery ground bolt on transmission Confirm that the earth terminals do not move after tightening bolts.	13. The terminal shape: straight

Reassembling Note for Wiring Harness

2/2

Around Battery

Battery cable (M/T 4WD model)

 (a) : 19.8 to 30.8N·m (2.0kgf-m to 3.1kgf-m,15.0lbt-ft to 23.0lbt-ft)	 14. Do not deform the shape of the terminal when installing.
"a". 45° Direct the terminal as shown.	 15. Panel surface
5. Clamp	(F): Front