

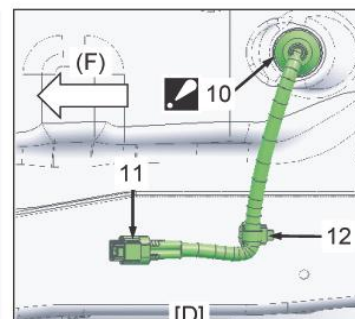
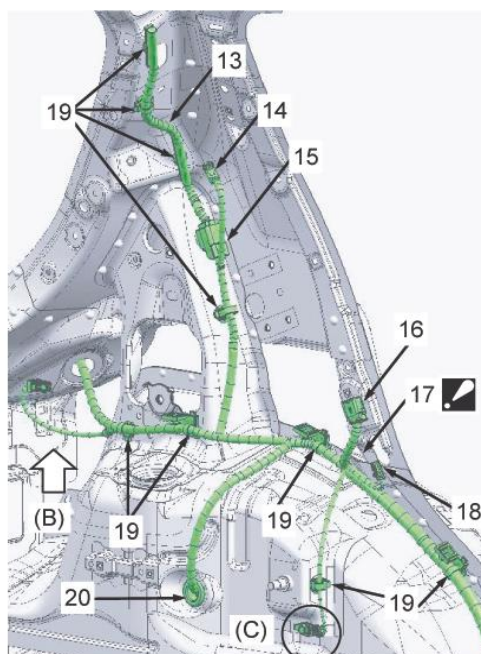
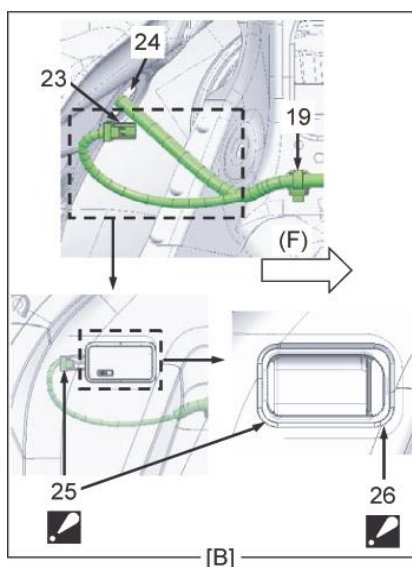


Reassembling Note for Wiring Harness

1/2

Around Main Floor

Floor (Left side)

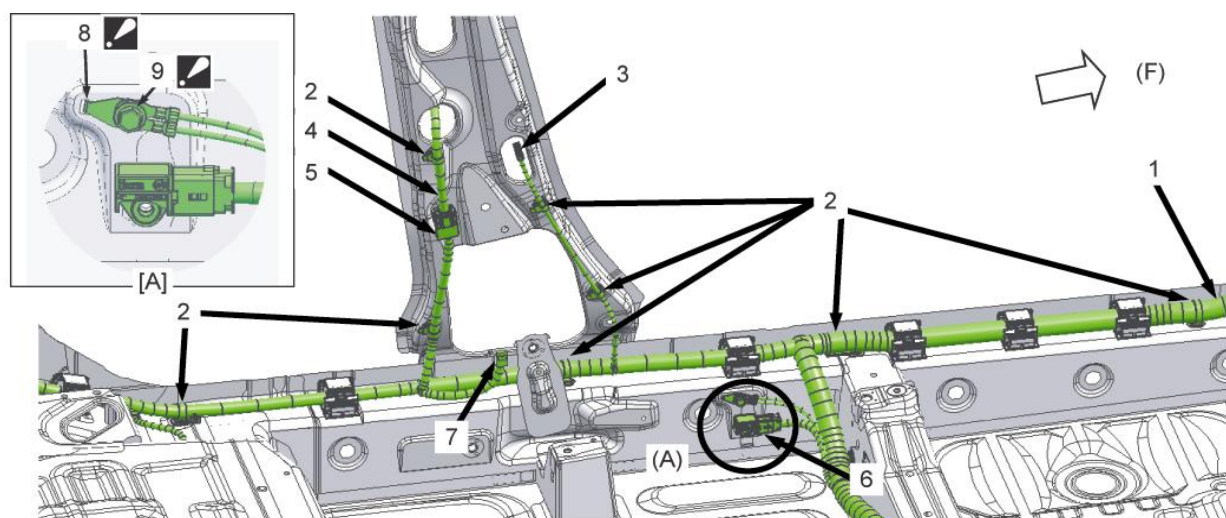

[A]: Detail (A)	13. Rear end door wire
[B]: View (B)	14. LHD: Curtain A/B inflator (Driver side)
[C]: Detail (C)	15. To rear end door harness
[D]: Outside view	16. LHD: G sensor (Driver side)
1. Floor harness	17. Pass the harness under the cable.
2. Clamp	18. Door switch (R)
3. LHD: Door switch (Driver side)	19. Clamp
4. Rear door wire	20. Grommet
5. To rear door harness	21. Ground bolt
	Confirm that the earth terminals do not move after tightening bolts.
6. LHD: Side-A/B G sensor (Driver side)	22. Floor ground (R)
	Set the terminal to the hole, and tighten the bolt.
7. LHD: Pretensioner (Driver side)	23. Luggage compartment lamp
8. Ground bolt	24. Rear combination lamp (L)
Set the terminal to the hole, and tighten the bolt.	
9. Ground bolt	25. Connect wires from the backward.
Confirm that the earth terminals do not move after tightening bolts.	

Reassembling Note for Wiring Harness

2/2

Around Main Floor

Floor (Left side)

 10. Set the grommet firmly.	 26. Do not pass the front side of the trim board.
11. ABS sensor (R)	(F): Front
12. Clamp	